


MOTUS

56-53312ng2

MOTUS LONG W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, satined chrome, high quality glass lens beam 60°, light output direct, tilting 360°, with converter, dimmability: not dimmable, IP20




DRAWING

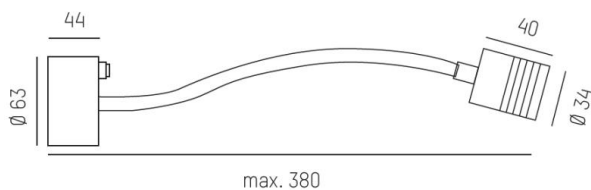

TECHNICAL DETAILS

|                       |                         |
|-----------------------|-------------------------|
| System perform. [W]   | 2                       |
| Bulb type             | LED                     |
| Luminous flux [lm]    | 160                     |
| Colour temp. [K]      | 3000K                   |
| CRI                   | >90                     |
| Optics                | high quality glass lens |
| Converter             | with converter          |
| Dimming               | not dimmable            |
| Light output          | direct                  |
| Beam angle [°]        | 60°                     |
| Voltage [V]           | 220-240V 50/60Hz        |
| Material              | aluminium               |
| Length [mm]           | 380                     |
| Diameter [mm]         | 34                      |
| IP protection class   | IP20                    |
| Voltage class         | protection cl. I        |
| Net weight [kg]       | 0,33                    |
| Colour lamp           | satined chrome          |
| EAN-Number            | 9010506372410           |
| Lifetime [h]          | 50 000                  |
| Energy efficiency cl. | E                       |

LIGHT DISTRIBUTION CURVE

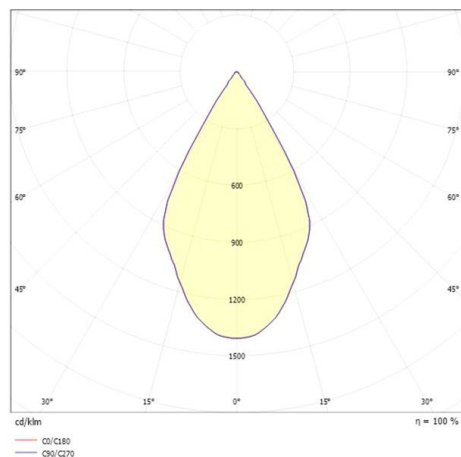

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.


## MOTUS

56-53313ng2

MOTUS LONG W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black, high quality glass lens beam 60°, light output direct, tilting 360°, with converter, dimmability: not dimmable, IP20




## DRAWING

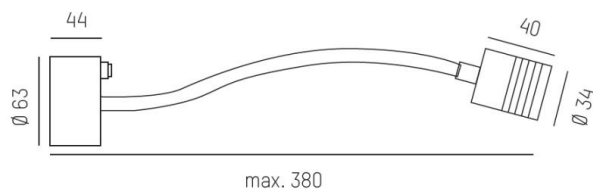

## TECHNICAL DETAILS

|                       |                         |
|-----------------------|-------------------------|
| System perform. [W]   | 2                       |
| Bulb type             | LED                     |
| Luminous flux [lm]    | 160                     |
| Colour temp. [K]      | 3000K                   |
| CRI                   | >90                     |
| Optics                | high quality glass lens |
| Converter             | with converter          |
| Dimming               | not dimmable            |
| Light output          | direct                  |
| Beam angle [°]        | 60°                     |
| Voltage [V]           | 220-240V 50/60Hz        |
| Material              | aluminium               |
| Length [mm]           | 380                     |
| Diameter [mm]         | 34                      |
| IP protection class   | IP20                    |
| Voltage class         | protection cl. I        |
| Net weight [kg]       | 0,33                    |
| Colour lamp           | black                   |
| EAN-Number            | 9010506766691           |
| Lifetime [h]          | 50 000                  |
| Energy efficiency cl. | E                       |

## LIGHT DISTRIBUTION CURVE

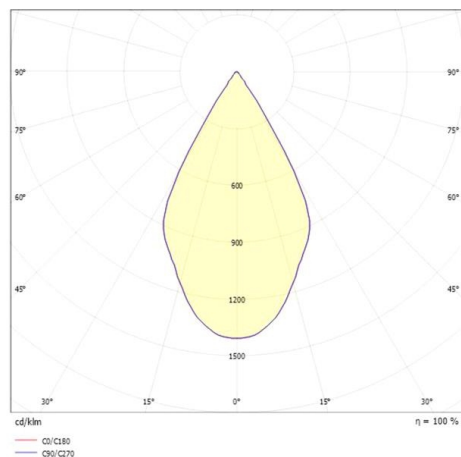

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.