

SALT



MORE INFO >>

	P	CCT	I	Flux	LOR
SALT Mini A280-00-10- WW WG WR NW NG NR	10W	2700K	700mA	1300 lm	67%
A280-00-11- WW WG WR NW NG NR	10W	3000K	700mA	1400 lm	67%
A280-00-12- WW WG WR NW NG NR	10W	4000K	700mA	1425 lm	67%

220-240 V~ | IP20 | CRI>90 | L80B10 >60,000h



OPTIONAL ACCESSORIES

WIRE TRIMLESS Accessories

FEED

Mains Trimless A023-00-01- | W | N |




FASTENING

Steel Cable Trimless A023-00-05- | W | N |

3 Pcs. needed





TRIMLESS TOOL D20 X D52mm A478-00-01

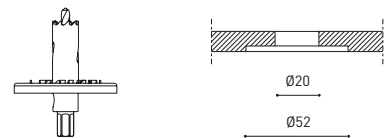

MAINS TRIMLESS



STEEL CABLE TRIMLESS



COLOUR | WW | WG | WR | NW | NG | NR | MATERIAL | AL | PMMA | RAL » 312

COLOUR | W | N |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

» 288



MORE INFO >>

		P	CCT	I	Flux	LOR
SALT 3	A220-03- 1 -0- WW WG WR NW NG NR	22W	2700K	700mA	2800 lm	79%
	A220-03- 1 -1- WW WG WR NW NG NR	22W	3000K	700mA	3025 lm	79%
	A220-03- 1 -2- WW WG WR NW NG NR	22W	4000K	700mA	3075 lm	79%
SALT 4	A220-04- (O) -1- WW WG WR NW NG NR	27W	3000K	700mA	4100 lm	79%
	A220-04- (O) -2- WW WG WR NW NG NR	27W	4000K	700mA	4175 lm	79%
SALT 5	A220-05- (O) -1- WW WG WR NW NG NR	35W	3000K	900mA	5125 lm	79%
	A220-05- (O) -2- WW WG WR NW NG NR	35W	4000K	900mA	5225 lm	79%
SALT 6	A220-06- (O) -1- WW WG WR NW NG NR	47,5W	3000K	1200mA	6550 lm	79%
	A220-06- (O) -2- WW WG WR NW NG NR	47,5W	4000K	1200mA	6650 lm	79%

220 V~ | IP20 | CRI>90 | L80B10 > 60.000 h



(O) *OPTIONS

2	DIM Push
4	DIM DALI

DIM PHASE CUT & OTHER DIM OPTIONS PLEASE CONSULT

OPTIONAL ACCESSORIES

WIRE TRIMLESS Accessories

FEED

Mains Trimless

A023-00-01- | W | N |

Mains Thick Trimless

A023-00-02- | W | N |





FASTENING

Steel Cable Trimless


A023-00-05- | W | N |



TRIMLESS TOOL D20 X D52mm A478-00-01

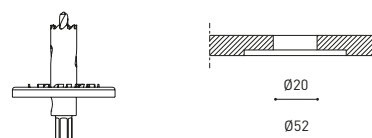

MAINS THICK TRIMLESS



COLOUR | WW | WG | WR | NW | NG | NR | MATERIAL | AL | PMMA | RAL » 312

COLOUR | W | N | COLOURS MAY AFFECT THE LIGHTING PARAMETERS » 288