



# STRAM SURFACE

Extended Family  
Stram\_P.66



MORE INFO >>

				P	CCT	I	Flux	LOR
STRAM Surface 1	A246-01-10-	WT   NT		10,5W	2700K	350mA	1525 lm	87%
	A246-01-11-	WT   NT		10,5W	3000K	350mA	1650 lm	87%
	A246-01-12-	WT   NT		10,5W	4000K	350mA	1675 lm	87%
STRAM Surface 2	A246-02-10-	WT   NT		15,5W	2700K	500mA	2100 lm	87%
	A246-02-11-	WT   NT		15,5W	3000K	500mA	2275 lm	87%
	A246-02-12-	WT   NT		15,5W	4000K	500mA	2300 lm	87%
STRAM Surface 3	A246-03- Ⓞ -0-	WT   NT		22W	2700K	700mA	2800 lm	87%
	A246-03- Ⓞ -1-	WT   NT		22W	3000K	700mA	3025 lm	87%
	A246-03- Ⓞ -2-	WT   NT		22W	4000K	700mA	3075 lm	87%

220  
240 V~ | IP20 | CRI>90 | L80B10 > 60.000h



Ⓞ \*OPTIONS

- 1 No DIM
- 2 DIM DALI | Push

DIM PHASE CUT & OTHER DIM OPTIONS  
PLEASE CONSULT



MORE INFO >>

				P	CCT	I	Flux	LOR
STRAM Surface Mini 2	A377-02-10-	WT   NT		7W	2700K	500mA	975 lm	80%
	A377-02-11-	WT   NT		7W	3000K	500mA	1050 lm	80%
	A377-02-12-	WT   NT		7W	4000K	500mA	1075 lm	80%
STRAM Surface Mini 3	A377-03- Ⓞ -0-	WT   NT		10W	2700K	700mA	1275 lm	80%
	A377-03- Ⓞ -1-	WT   NT		10W	3000K	700mA	1375 lm	80%
	A377-03- Ⓞ -2-	WT   NT		10W	4000K	700mA	1400 lm	80%

220  
240 V~ | IP20 | CRI>90 | L80B10 > 60.000h




Ⓞ \*OPTIONS

- 1 No DIM
- 5 DIM Phase Cut

OTHER DIM OPTIONS PLEASE CONSULT

## STRAM SURFACE

## STRAM SURFACE MINI

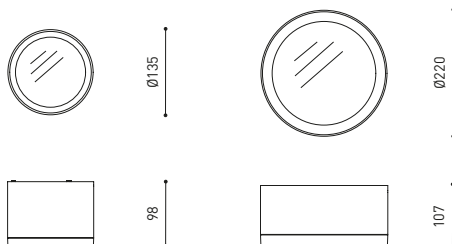

COLOUR | WT | NT |

MATERIAL | AL | PMMA |

RAL » 312

PRISMATIC DIFFUSER PLEASE CONSULT | COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
CERTIFICATES APPLICABLE FOR STRAM SURFACE

» 288