


CAMEA ROUND

472-20049200

CAMEA ROUND SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, terra, beam 40°, light output direct, dimmability: not dimmable, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	4
Bulb type	AC LED
Luminous flux [lm]	220
Colour temp. [K]	3000K
CRI	>90
Dimming	not dimmable
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	80
Diameter [mm]	80
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,42
Colour lamp	terra
EAN-Number	9010506127300
Lifetime [h]	L80 B10 20 000

LIGHT DISTRIBUTION CURVE

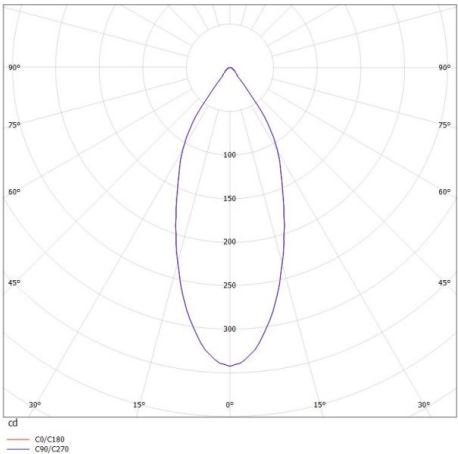

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.


CAMEA ROUND

472-20043200

CAMEA ROUND SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, terra, beam 40°, light output direct, dimmability: not dimmable, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	4
Bulb type	AC LED
Luminous flux [lm]	220
Colour temp. [K]	2700K
CRI	>90
Dimming	not dimmable
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	80
Diameter [mm]	80
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,42
Colour lamp	terra
EAN-Number	9010506265323
Lifetime [h]	L80 B10 20 000

LIGHT DISTRIBUTION CURVE

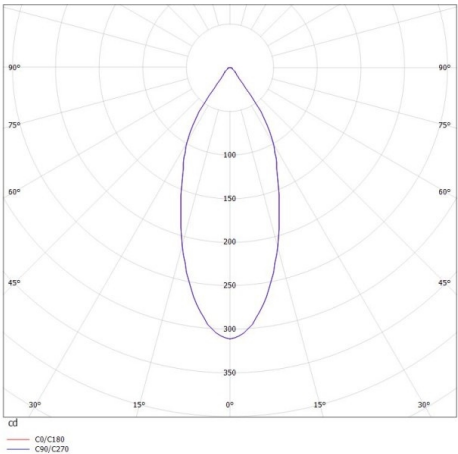

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.