

PARK

Smart: Modular LED system with integrated electronics

Efficient: Powerful LED lighting technology including light control

Durable: residual light flow 80% after 100.000 operating hours

Easy installation: completely pre-assembled with connecting cables and module

Areas of application:

- Parks
- Public places
- Roads in residential areas
- Cycle paths
- Pedestrian crossings



HELLUX

Lunux Lighting GmbH

Zaucheweg 4
04316 Leipzig


Telefon +49 (0)341 241872 0
Telefax +49 (0)341 241872 38

info@lunux-lighting.com
www.lunux-lighting.com

©Lunux Lighting GmbH. Die Angaben können je nach Ausführung variieren. Technische Änderungen vorbehalten. Alle Angaben ohne Gewähr.



Example of luminous intensity distribution: U optics / S optics

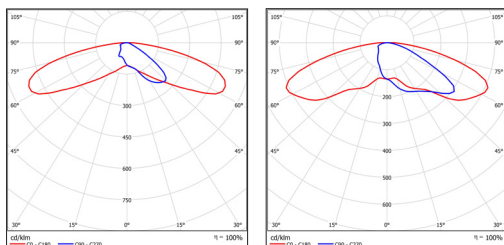

LIGHT HOUSING	
Material	Aluminum die casting
Colour (powder coating)	DB 703
Mounting type	60 or 76 mm spigot size for side-mounted or top-mounted luminaires / 42 or 65 mm for side-mounted luminaires
Orientation possibilities	Tilt adjustable from -15° to +15° / tilt adjustable from 0° to -15°
Dimension (length x width x height)	680 x 167 x 110 mm
Weight	6,5 kg
Wind attack area	FW = 0,08 m ²
IP Protection class	IP 67 IP 69K
Glas type	PMMA
Impact resistance	IK 08
ILLUMINANT PROPERTIES	
Light source	1 Eco module with 14 LEDs or 28 LEDs
Optical system	PMMA single optics
Rated luminous flux	800 - 5.000 lm
Light efficiency	approx. 143 lm/W
Colour temperature	Amber 3.000 K 4.000 K 5.000 K
Colour rendering index (RA)	CRI 60 (Amber), CRI 83 (3.000 K), CRI 73 (4.000 K), CRI 70 (5.000 K)
Dimming (Power control)	Optional power line control (50 % 100 %) dimmprofile DALI
Interface for light management	NEMA or Zhaga book 18 pedestal
Rated lifetime at (ta) 30C°	90 % after 60.000 hours (after IES LM 80 & TM 21) 80 % after 100.000 hours
Thermal management	✓
Constant Light Output (CLO)	Optional
ELECTRICAL PROPERTIES	
Rated power	7,5 – 37,5 W (depending on luminous flux)
Electrical protection class	SK II
Operating voltage	220 – 240 V
Frequence	50 – 60 Hz
Surge protection	10 kV
INSTALLATION REQUIREMENTS	
Application areas	Parks public places roads in residential areas cycle paths pedestrian crossings
Light point height	4 - 7 m
Lighting classes	M P
Admitted ambient temperature (ta)	-40 °C to +35 °C
OTHER PROPERTIES	
Certification	CE