

YORU SPIKE



Extended Family
Yoru_P.164



MORE INFO >>

		P	CCT	Flux	LOR
YORU Spike 24V	A475- Ⓞ -0 - 00- WT NT	3W	2700K	400 lm	84%
	A475- Ⓞ -0 - 01- WT NT	3W	3000K	410 lm	84%

24 V | IP65 | CRI>90 | L80B10
+ 60.000h



Ⓞ TOTAL HEIGHT - H



1	400 mm
2	500 mm

OPTIONAL ACCESSORY

Connector IP67 0434-01-67- | N |


Connector IP67 T-Shape 0434-01-68- | N |

For cable Ø3,5-7,5mm, section <1,5mm²

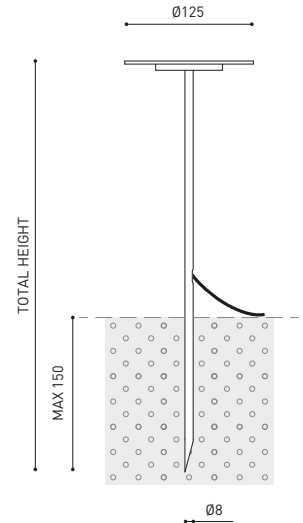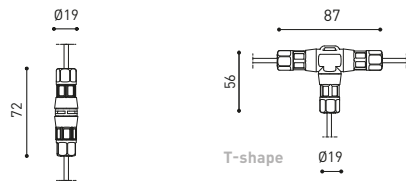


		P	V	D [A x B x C]	
YORU Spike 24V ** Remote Power Supply	NO DIM	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm

220 V~ | IP20



YORU Spike 24V * Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-33	CASAMBI	24V	172 x 42 x 20mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm

24 V | IP20



DROP VOLTAGE TABLE

POWER [W]	CABLE SECTION [mm ²]	CABLE LENGTH [m]			
		<25	<50	<75	<100
60	0,75	✓	✓	X	X
	1,5	✓	✓	✓	✓
100	0,75	✓	X	X	X
	1,5	✓	✓	✓	X

COLOUR | WT | NT |

MATERIAL | INOX AISI 304 | AL | PC |

RAL » 312

» 288

OUTDOOR