



Extended Family

Black Foster Micro\_P.10  
 Black Foster\_P.12  
 Black Foster Surface\_P.104

Black Foster Suspension\_P.133  
 Black Foster Micro 24V\_P.180  
 Black Foster Custom\_P.242

MORE INFO >>



		+RE	P	CCT	Beam	I	Flux	LOR
<b>BLACK FOSTER 48V Tilt 5</b>	A481-40- Ⓞ -0-   NT   WT   NTMG   -S	10,5W	2700K	38°	700mA	950 lm	92%	
	A481-40- Ⓞ -1-   NT   WT   NTMG   -S	10,5W	3000K	38°	700mA	1050 lm	92%	
	A481-40- Ⓞ -2-   NT   WT   NTMG   -S	10,5W	4000K	38°	700mA	1250 lm	92%	
	A481-41- Ⓞ -0-   NT   WT   NTMG   -S	10,5W	2700K	19°	700mA	950 lm	90%	
	A481-41- Ⓞ -1-   NT   WT   NTMG   -S	10,5W	3000K	19°	700mA	1050 lm	90%	
	A481-41- Ⓞ -2-   NT   WT   NTMG   -S	10,5W	4000K	19°	700mA	1250 lm	90%	

48 V | IP20 | CRI>90 | L90B10 > 102.000 h





Ⓞ	OPTIONS*
1	No DIM
2	DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT



+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A4814011WT
-S	Track 48V Short	A4814011WT-S

FINISHING	Body	Lampshade
NT	NT	N
WT	WT	N
NTMG	NT	MG

BLACK FOSTER 48V TILT 5

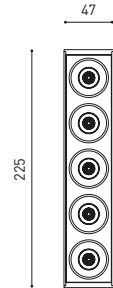

BLACK FOSTER 48V TILT 5 SHORT (-S)

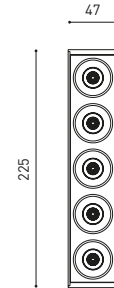

VISIBLE LIMIT

MATERIAL | AL | ABS+PC |

RAL » 312

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» 288



MORE INFO >>



MORE INFO >>

		P	CCT	I	Flux	LOR
<b>BLACK FOSTER Micro 48V 5</b>	A416-20- ② -0-   N	7W	2700K	500mA	775 lm	87%
	A416-20- ② -1-   N	7W	3000K	500mA	800 lm	87%
	A416-20- ② -2-   N	7W	4000K	500mA	850 lm	87%

48 V | III IP20 | CRI>90 | L90B10 > 60.000 h



		P	CCT	I	Flux	LOR
<b>BLACK FOSTER Micro 48V 10</b>	A416-50- ② -0-   N	14W	2700K	500mA	1550 lm	87%
	A416-50- ② -1-   N	14W	3000K	500mA	1600 lm	87%
	A416-50- ② -2-   N	14W	4000K	500mA	1700 lm	87%

48 V | III IP20 | CRI>90 | L90B10 > 60.000 h




② OPTIONS\*

- 1 No DIM
- 2 DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT

**BLACK FOSTER MICRO  
48V 5**

**BLACK FOSTER MICRO  
48V 10**

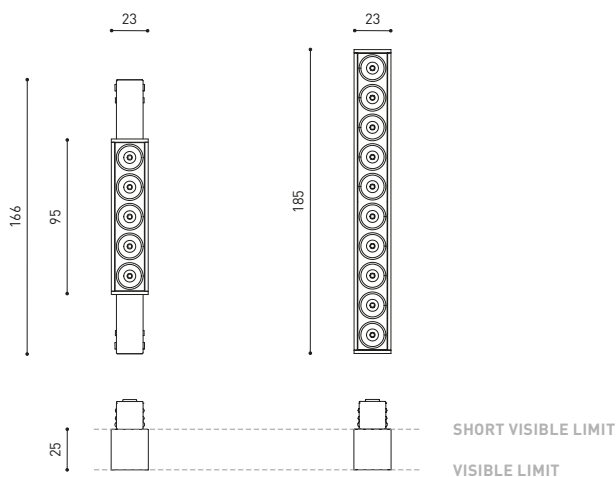

FINISHING | N ■ |

MATERIAL | AL | ABS+PC |

RAL ⓘ » 312

» 288