

MORE INFO >>

		P	CCT	I	Flux	LOR
LINE 500 48V	A376-10- ① -0-   N   WT	10,5W	2700K	350mA	1500 lm	65%
	A376-10- ① -1-   N   WT	10,5W	3000K	350mA	1600 lm	65%
	A376-10- ① -2-   N   WT	10,5W	4000K	350mA	1650 lm	65%
LINE 1000 48V	A376-20- ① -0-   N   WT	21W	2700K	700mA	3000 lm	65%
	A376-20- ① -1-   N   WT	21W	3000K	700mA	3200 lm	65%
	A376-20- ① -2-   N   WT	21W	4000K	700mA	3300 lm	65%
LINE 2000 48V	A376-30- ① -0-   N   WT	42W	2700K	700mA	6000 lm	65%
	A376-30- ① -1-   N   WT	42W	3000K	700mA	6400 lm	65%
	A376-30- ① -2-   N   WT	42W	4000K	700mA	6600 lm	65%

48 V | IP20 | CRI>90 | L80B10 >60.000h



① \*OPTIONS


- 1 No DIM
- 2 DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT


LINE 500 48V



LINE 1000 48V

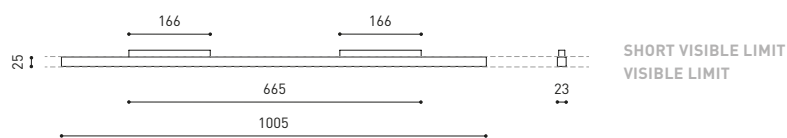

LINE 2000 48V

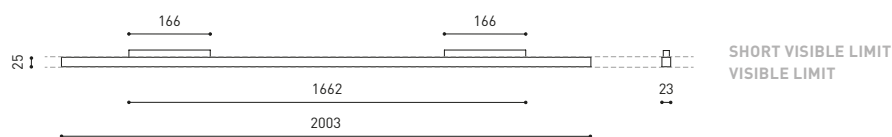

FINISHING | N ■ | WT □ | MATERIAL | AL | PC |

RAL » 312

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

» 288