

# INCASSI A TERRA


Ground recessed

## MATRIX - MATRIX RGBW



### MATRIX RECESSED

H83 L340 W98  
H83 L620 W98  
H83 L900 W98  
H83 L1180 W98

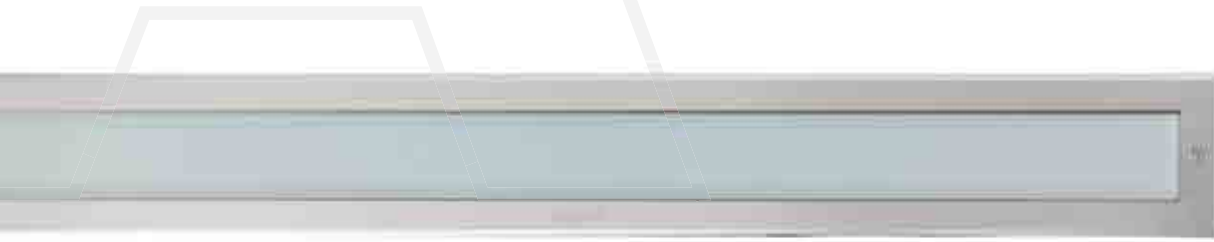

## Prodotti Lineari

lens version & satined glass

12° FASCIO STRETTO - NARROW BEAM

28° FASCIO MEDIO - MEDIUM BEAM

50° FASCIO LARGO - LARGE BEAM

42°x12° FASCIO OVALE - OVAL BEAM

FASCIO ASIMMETRICO - ASYMMETRIC BEAM

FASCIO DIFFUSO - DIFFUSE BEAM



### MATRIX FLOODLIGHT

PAG. 144

MATRIX RGBW



24° FASCIO MEDIO - MEDIUM BEAM

35° FASCIO LARGO - LARGE BEAM

54° FASCIO SUPER LARGO - SUPER WIDE BEAM

40°x20° FASCIO OVALE - OVAL BEAM







# MATRIX RECESSED - MATRIX RECESSED RGBW

DATI TECNICI  
Technical Data

## INSTALLAZIONE

Incasso a terra - Calpestabile fino a 500Kg

## PROTEZIONE

IP 67 - IK 09

## CORPO

Alluminio estruso

## BOX

Lamiera di Acciaio Inox AISI430F

## SCHERMO

Vetro extrachiario temperato da 8 mm serigrafato  
Vetro Opale (versione VS)

## CORNICE

Acciaio satinato AISI316

## GUARNIZIONI

Gomma EPDM a celle chiuse

## VITERIA

Acciaio Inox A2

## ASSEMBLY / USAGE

Inground Recessed - Walkable max load 500Kg

## PROTECTION

IP 67 - IK 09

## BODY

Extruded aluminium

## BOX

Stainless Steel SHEET AISI430F

## SCREEN

8 mm silk-screened extra-clear tempered glass  
Opal Glass (VS version)

## FRAME

Stainless Steel AISI316

## SEALS

Closed-cell EPDM rubber

## SCREWS



Stainless steel A2

- NB** 12° FASCIO STRETTO - NARROW BEAM
- MB** 28° FASCIO MEDIO - MEDIUM BEAM
- WB** 50° FASCIO LARGO - LARGE BEAM
- OB** 42°x12° FASCIO OVALE - OVAL BEAM
- AB** FASCIO ASIMMETRICO - ASYMMETRIC BEAM
- VS** FASCIO DIFFUSO - DIFFUSE BEAM

## Versione RGBW

- MB** 24° FASCIO MEDIO - MEDIUM BEAM
- WB** 35° FASCIO LARGO - LARGE BEAM
- SW** 54° FASCIO SUPER LARGO - SUPER WIDE BEAM
- O4** 40°x20° FASCIO OVALE - OVAL BEAM


3000K - 4000K  
RGBW

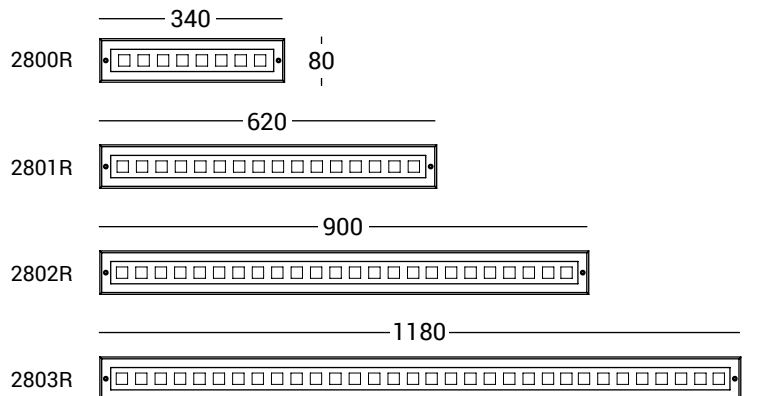



Units = mm



## MATRIX RECESSED


**Wallwasher ad incasso a luce diffusa L. 340 / Recessed Wallwasher diffused light L. 340**











Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2800R/WR50VS.99</b>	 Diffuso Diffuse	8W	870 lm	339 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2800R/NR50VS.99</b>	 Diffuso Diffuse	8W	920 lm	357 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

VS = Vetro Opale / VS = Opal Glass

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg

**Wallwasher ad incasso con lenti L. 340 / Recessed Wallwasher with lens L. 340**

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2800R/WP50.NB99</b>	 Spot/12° Spot/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2800R/WP50.MB99</b>	 Medio/28° Flood/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2800R/WP50.OB99</b>	 Ovale/42°x12° Oval/42°x12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2800R/WP50.WB99</b>	 Largo/50° Wide Flood/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2800R/WP50.AB99</b>	 Asimmetrico Asymmetric	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2800R/NP50.NB99</b>	 Spot/12° Spot/12°	14W	1525 lm	1281 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2800R/NP50.MB99</b>	 Medio/28° Flood/28°	14W	1525 lm	1281 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2800R/NP50.OB99</b>	 Ovale/42°x12° Oval/42°x12°	14W	1525 lm	1281 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2800R/NP50.WB99</b>	 Largo/50° Wide Flood/50°	14W	1525 lm	1281 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2800R/NP50.AB99</b>	 Asimmetrico Asymmetric	14W	1525 lm	1281 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing


Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg

Accessories informazioni sugli accessori da pag. 463 e sul nostro sito web information on accessories from page 463 and on our website

<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm <sup>2</sup> IP68 Connector 2way/3Poles 3x2.5mm <sup>2</sup>	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
-------------------	--	------------------	--

# MATRIX RECESSED




**Wallwasher ad incasso a luce diffusa L. 620 / Recessed Wallwasher diffused light L. 620**

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2801R/WR50VS.99</b>	Diffuso Diffuse	13W	1740 lm	678 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2801R/NR50VS.99</b>	Diffuso Diffuse	13W	1840 lm	718 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

VS = Vetro Opale / VS = Opal Glass

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg



**Wallwasher ad incasso con lenti L. 620 / Recessed Wallwasher with lens L. 620**

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2801R/WP50.NB99</b>	Spot/12° Spot/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2801R/WP50.MB99</b>	Medio/28° Flood/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2801R/WP50.OB99</b>	Ovale/42°x12° Oval/42°x12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2801R/WP50.WB99</b>	Largo/50° Wide Flood/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2801R/WP50.AB99</b>	Asimmetrico Asymmetric	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2801R/NP50.NB99</b>	Spot/12° Spot/12°	26W	3050 lm	2562 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2801R/NP50.MB99</b>	Medio/28° Flood/28°	26W	3050 lm	2562 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2801R/NP50.OB99</b>	Ovale/42°x12° Oval/42°x12°	26W	3050 lm	2562 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2801R/NP50.WB99</b>	Largo/50° Wide Flood/50°	26W	3050 lm	2562 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2801R/NP50.AB99</b>	Asimmetrico Asymmetric	26W	3050 lm	2562 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request


Calpestatbile 500 Kg / Walkable 500Kg

## Accessories informazioni sugli accessori da pag. 463 e sul nostro sito web information on accessories from page 463 and on our website

<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm <sup>2</sup> IP68 Connector 2way/3Poles 3x2.5mm <sup>2</sup>	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>MOR685P/3V</b>	Connettore a Y, IP68 3Vie/5Poli 5x2.5mm <sup>2</sup> IP68 Y-Connector 3ways/5Poles 5x2.5mm <sup>2</sup>		



# MATRIX RECESSED




## Wallwasher ad incasso a luce diffusa L. 900 / Recessed Wallwasher diffused light L. 900

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2802R/WR50VS.99</b>	Diffuso Diffuse	19W	2610 lm	1020 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2802R/NR50VS.99</b>	Diffuso Diffuse	19W	2760 lm	1076 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

VS = Vetro Opale / VS = Opal Glass

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg



## Wallwasher ad incasso con lenti L. 900 / Recessed Wallwasher with lens L. 900

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2802R/WP50.NB99</b>	Spot/12° Spot/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2802R/WP50.MB99</b>	Medio/28° Flood/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2802R/WP50.OB99</b>	Ovale/42°x12° Oval/42°x12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2802R/WP50.WB99</b>	Largo/50° Wide Flood/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2802R/WP50.AB99</b>	Asimmetrico Asymmetric	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2802R/NP50.NB99</b>	Spot/12° Spot/12°	42W	4575 lm	3843 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2802R/NP50.MB99</b>	Medio/28° Flood/28°	42W	4575 lm	3843 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2802R/NP50.OB99</b>	Ovale/42°x12° Oval/42°x12°	42W	4575 lm	3843 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2802R/NP50.WB99</b>	Largo/50° Wide Flood/50°	42W	4575 lm	3843 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2802R/NP50.AB99</b>	Asimmetrico Asymmetric	42W	4575 lm	3843 lm	220-240Vac 50/60Hz	4000K	I 67 09	80


Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg

## Accessories informazioni sugli accessori da pag. 463 e sul nostro sito web information on accessories from page 463 and on our website

<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm <sup>2</sup> IP68 Connector 2way/3Poles 3x2.5mm <sup>2</sup>	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>MOR685P/3V</b>	Connettore a Y, IP68 3Vie/5Poli 5x2.5mm <sup>2</sup> IP68 Y-Connector 3ways/5Poles 5x2.5mm <sup>2</sup>		



# MATRIX RECESSED


## Wallwasher ad incasso a luce diffusa L.1180 / Recessed Wallwasher diffused light L.1180

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2803R/WR50VS.99</b>	Diffuso Diffuse	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2803R/NR50VS.99</b>	Diffuso Diffuse	26W	3680 lm	1435 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

VS = Vetro Opale / VS = Opal Glass

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg



## Wallwasher ad incasso con lenti L.1180 / Recessed Wallwasher with lens L.1180

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2803R/WP50.NB99</b>	Spot/12° Spot/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2803R/WP50.MB99</b>	Medio/28° Flood/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2803R/WP50.OB99</b>	Ovale/42°x12° Oval/42°x12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2803R/WP50.WB99</b>	Largo/50° Wide Flood/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2803R/WP50.AB99</b>	Asimmetrico Asymmetric	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	3000K	I 67 09	80
<b>2803R/NP50.NB99</b>	Spot/12° Spot/12°	54W	6100 lm	5124 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2803R/NP50.MB99</b>	Medio/28° Flood/28°	54W	6100 lm	5124 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2803R/NP50.OB99</b>	Ovale/42°x12° Oval/42°x12°	54W	6100 lm	5124 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2803R/NP50.WB99</b>	Largo/50° Wide Flood/50°	54W	6100 lm	5124 lm	220-240Vac 50/60Hz	4000K	I 67 09	80
<b>2803R/NP50.AB99</b>	Asimmetrico Asymmetric	54W	6100 lm	5124 lm	220-240Vac 50/60Hz	4000K	I 67 09	80

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

Calpestatbile 500 Kg / Walkable 500Kg


## Accessories informazioni sugli accessori da pag. 463 e sul nostro sito web information on accessories from page 463 and on our website

<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm <sup>2</sup> IP68 Connector 2way/3Poles 3x2.5mm <sup>2</sup>	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>MOR685P/3V</b>	Connettore a Y, IP68 3Vie/5Poli 5x2.5mm <sup>2</sup> IP68 Y-Connector 3ways/5Poles 5x2.5mm <sup>2</sup>		





# MATRIX RECESSED RGBW



## Wallwasher ad incasso RGBW L. 340 / Recessed Wallwasher RGBW L. 340


Codice Code	Fascio Beam	* Watt with Algorithm	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
2800R/RCRC.MB99	Medio/24° Medium/24°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
2800R/RCRC.O499	Ovale/40°x20° Oval/40°x20°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
2800R/RCRC.WB99	Largo/35° Wide Flood/35°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
2800R/RCRC.SW99	Super Largo/54° Super Wide/54°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: Dimmerabile / Dimming: Dimmable

Calpestatbile 500 Kg / Walkable 500Kg

\* Watt with Algorithm Un prodotto RGBW con sistema **AUGENTI ALGORITHM** da 12W, è comparabile a prodotti RGBW STANDARD da 36/40W  
An **AUGENTI** RGBW product with **ALGORITHM SYSTEM** from 12W is comparable to standard RGBW products from 36/40W



## Wallwasher ad incasso RGBW L. 620 / Recessed Wallwasher RGBW L. 620

Codice Code	Fascio Beam	* Watt with Algorithm	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
2801R/RCRC.MB99	Medio/24° Medium/24°	24W	3300 lm	2840 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
2801R/RCRC.O499	Ovale/40°x20° Oval/40°x20°	24W	3300 lm	2840 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
2801R/RCRC.WB99	Largo/35° Wide Flood/35°	24W	3300 lm	2840 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
2801R/RCRC.SW99	Super Largo/54° Super Wide/54°	24W	3300 lm	2840 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: Dimmerabile / Dimming: Dimmable

Calpestatbile 500 Kg / Walkable 500Kg

\* Watt with Algorithm Un prodotto RGBW con sistema **AUGENTI ALGORITHM** da 24W, è comparabile a prodotti RGBW STANDARD da 72/76W  
An **AUGENTI** RGBW product with **ALGORITHM SYSTEM** from 24W is comparable to standard RGBW products from 72/76W



Il sistema RGBW è stato completamente rivisto, aumentando notevolmente la sua efficienza ed il flusso luminoso dei colori.  
All'interno della lampada è stato inserito un nuovo sistema di controllo DMX basato su un algoritmo a microchip,  
**in grado di ottenere una potenza costante e piena per ogni singolo colore o nella combinazione dei canali colore.**


The RGBW system has been completely revised, significantly increasing its efficiency and lumen output of colors.  
A new DMX control system based on a microchip algorithm has been inserted inside the lamp,  
**capable of obtaining a constant and full power wattage for each single color or in the combination of the color channels.**



DIGITAL  
ALGORITHM  
BROCHURE



# MATRIX RECESSED RGBW



## Wallwasher ad incasso RGBW L. 900 / Recessed Wallwasher RGBW L. 900


Codice Code	Fascio Beam	* Watt with Algorithm	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2802R/RCRC.MB99</b>	Medio/24° Medium/24°	36W	4950 lm	4260 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
<b>2802R/RCRC.O499</b>	Ovale/40°x20° Oval/40°x20°	36W	4950 lm	4260 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
<b>2802R/RCRC.WB99</b>	Largo/35° Wide Flood/35°	36W	4950 lm	4260 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
<b>2802R/RCRC.SW99</b>	Super Largo/54° Super Wide/54°	36W	4950 lm	4260 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: Dimmerabile / Dimming: Dimmable

Calpestatbile 500 Kg / Walkable 500Kg

\* Watt with Algorithm Un prodotto RGBW con sistema **AUGENTI ALGORITHM** da 36W, è comparabile a prodotti RGBW STANDARD da 108/110W  
An **AUGENTI** RGBW product with **ALGORITHM SYSTEM** from 36W is comparable to standard RGBW products from 108/110W



## Wallwasher ad incasso RGBW L.1180 / Recessed Wallwasher RGBW L.1180

Codice Code	Fascio Beam	* Watt with Algorithm	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL IP IK	CRI
<b>2803R/RCRC.MB99</b>	Medio/24° Medium/24°	48W	6600 lm	5680 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
<b>2803R/RCRC.O499</b>	Ovale/40°x20° Oval/40°x20°	48W	6600 lm	5680 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
<b>2803R/RCRC.WB99</b>	Largo/35° Wide Flood/35°	48W	6600 lm	5680 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW
<b>2803R/RCRC.SW99</b>	Super Largo/54° Super Wide/54°	48W	6600 lm	5680 lm	24Vdc	RGBW (W=6500K)	III 67 09	RGBW

Vetro extrachiaro temperato da 8 mm serigrafato / Tempered Extraclear Glass 8mm with silk-screen printing

Dimmerazione: Dimmerabile / Dimming: Dimmable

Calpestatbile 500 Kg / Walkable 500Kg


\* Watt with Algorithm Un prodotto RGBW con sistema **AUGENTI ALGORITHM** da 48W, è comparabile a prodotti RGBW STANDARD da 144/150W  
An **AUGENTI** RGBW product with **ALGORITHM SYSTEM** from 48W is comparable to standard RGBW products from 144/150W

### Informazioni sugli accessori a fine capitolo o da pag. 463 e sito. information on accessories at the end of the chapter or from page. 463 and website.

<b>E.CAV.538.020</b>	Cavo/Cable H05BQ-F 5x1 2mt	<b>E.TRA.579</b>	Driver ON/OFF - 100W 24Vdc IP67 L140xW63xH32
<b>E.CAV.538.050</b>	Cavo/Cable H05BQ-F 5x1 5mt	<b>E.TRA.592</b>	Driver remoto ELG 240W 24Vdc IP67 L244xW71xH38
<b>E.CAV.538.100</b>	Cavo/Cable H05BQ-F 5x1 10mt	<b>E.CNT.001</b>	Tastiera RGBW 16DMX Ch. 100-240V RGBW Controller 16DMX Ch. 100-240V
<b>MOR685P/2V</b>	Connettore IP68 2Vie/5Poli 5x4mm <sup>2</sup> IP68 Connector 2-ways/5-Poles 5x4mm <sup>2</sup>	<b>E.CNT.002</b>	Tastiera RGBW 1024DMX Ch. USB/Ethernet 100-240V RGBW Controller 1024DMX Ch. USB/Ethernet 100-240V
<b>MOR685P/3V</b>	Connettore a Y, IP68 3Vie/5Poli 5x2.5mm <sup>2</sup> IP68 Y-Connector 3ways/5Poles 5x2.5mm <sup>2</sup>		

# MATRIX RGBW RECESSED ACCESSORI Accessories

## CONNESSIONE - CONNECTION



**E.CAV.538.020** Cavo/Cable H05BQ-F 5x1 - 2mt

**E.CAV.538.050** Cavo/Cable H05BQ-F 5x1 - 5mt

**E.CAV.538.100** Cavo/Cable H05BQ-F 5x1 - 10mt



**MOR685P/2V** Connettore IP68 2Vie/5Poli. Sezione massima 5x4mm<sup>2</sup>  
IP68 Connector 2-ways/5-poles. Maximum section 5x4mm<sup>2</sup>



**MOR685P/3V** Connettore a Y - IP68 3Vie/5Poli - 5x2.5mm<sup>2</sup>  
IP68 Y-Connector 3ways/5poles - 5x2.5mm<sup>2</sup>

## ALIMENTATORI - DRIVER - ELECTRONICS 24Vdc in Tensione - Constant voltage 24Vdc



**E.TRA.579**  
Cod. 2800R - 1 Driver for 1-4 Lamps  
Cod. 2801R - 1 Driver for 1-2 Lamps  
Cod. 2802R - 1 Driver for 1 Lamp  
Cod. 2803R - 1 Driver for 1 Lamp

Driver 100W 24Vdc IP67 - ON/OFF  
L140xW63xH32



**E.TRA.592**  
Cod. 2800R - 1 Driver for 5-9 Lamps  
Cod. 2801R - 1 Driver for 3-5 Lamps  
Cod. 2802R - 1 Driver for 2-3 Lamps  
Cod. 2803R - 1 Driver for 2 Lamps

Driver ELG 240W 24Vdc IP67  
L244xW71xH38



## TOUCH CONTROLLER



**E.CNT.001**

Tastiera Touch controllo remoto RGBW 16DMX Ch.100-240V  
RGBW Touch Panel controller 16DMX Ch. 100-240V



**E.CNT.002**

Tastiera Touch controllo remoto RGBW 1024DMX Ch. USB/Ethernet 100-240V  
RGBW Touch Panel controller 1024DMX Ch. USB/Ethernet 100-240V

