



Magnetic 24V iO Micro\_P.93  
iO surface\_P.126

Extended Family  
iO 24V\_P.183  
iO 48V\_P.202



MORE INFO >>

		P	CCT	Beam	I	Flux	LOR
iO	A262-00-10-   WT   NT	4,5W	2700K	20°	500mA	485 lm	92%
	A262-00-11-   WT   NT	4,5W	3000K	20°	500mA	505 lm	92%
	A262-00-12-   WT   NT	4,5W	4000K	20°	500mA	520 lm	92%
	A262-00-20-   WT   NT	4,5W	2700K	30°	500mA	485 lm	89%
	A262-00-21-   WT   NT	4,5W	3000K	30°	500mA	505 lm	89%
	A262-00-22-   WT   NT	4,5W	4000K	30°	500mA	520 lm	89%
	A262-00-30-   WT   NT	4,5W	2700K	56°	500mA	485 lm	86%
	A262-00-31-   WT   NT	4,5W	3000K	56°	500mA	505 lm	86%
	A262-00-32-   WT   NT	4,5W	4000K	56°	500mA	520 lm	86%

220 V~ | IP20 | CRI>90 | L90B10 >55.000h



OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY  
AFFECTS THE LIGHTING PARAMETERS


iO Beam Mixer Diffuser 0805-01-00



iO Anti-glare Honeycomb Louver 0806-00-00 | WT | NT |



iO High Chromatic LED > 281

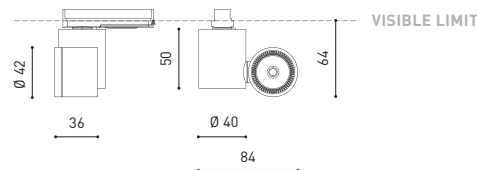

COLOUR | WT  | NT  |

MATERIAL | AL | PC |

TRACK 1L > 218