

PLANET
MAGNETIC PROFILE






SURFACE - PENDANT APPLICATION

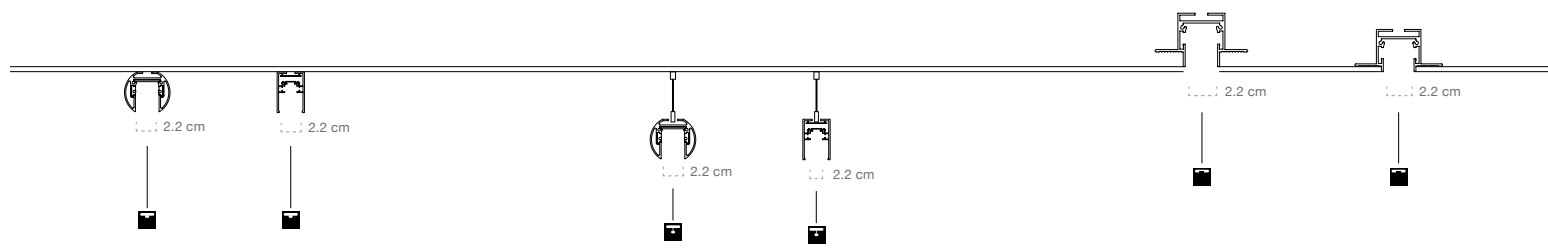


PLANET - 9110020

Sandy Black Aluminium
Suspend or Surface
Magnetic Track
Max Power 300 Watt
L: 100 W1: 3.3 H: 3.9 cm




**INSIDE
WIDTH
RAIL
2.2 CM**

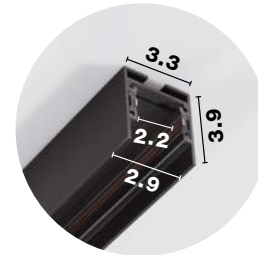



PLANET - 9110021

Sandy Black Aluminium
Magnetic Track For Suspend
or Surface Installation
Max Power 300Watt
L: 200 W: 3.3 H: 3.3 cm




PLANET - 9136101

Sandy Black Aluminium
Surface or Pendant
Magnetic Profile
Max Power 300 Watt
L: 100 W1: 2.2 W2: 4.4 H: 3.9 cm

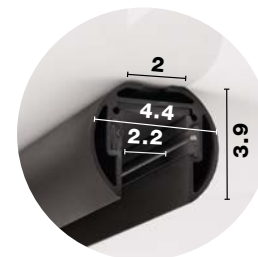

PLANET - 9136338

Sandy Black Aluminium
Surface or Pendant Magnetic Profile
Max Power 300 Watt
L: 200 W1: 2.2 W2: 4.4 H: 3.9 cm



For installation instructions go on page 452
For accessories go on page 068-084




RECESS APPLICATION




PLANET . 9136100

Sandy Black Aluminium
Trimless Recess
Magnetic Profile
Max Power 300 Watt
L: 100 W1: 2.3 W2: 6.5 H: 3.9 cm
Cut Out: 3.45 cm




WITH GAP

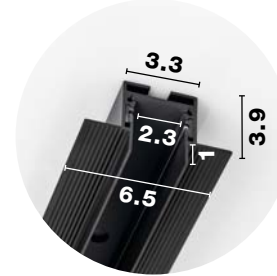


PLANET . 9136335

Sandy Black Aluminium
Trimless Recess
Magnetic Profile
Max Power 300 Watt
L: 200 W1: 2.3 W2: 6.5 H: 3.9 cm
Cut Out: 3.45 cm




**INSIDE
WIDTH
RAIL
2.2 CM**

WITHOUT GAP

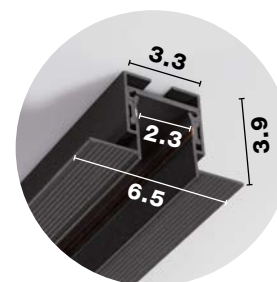


PLANET . 9999100

Sandy Black Aluminium
Magnetic Track For
Recessed Installation
Max Power 300Watt
L: 100 W: 6.5 H: 3.9 cm



PLANET . 9999101

Sandy Black Aluminium
Magnetic Track For Recessed Installation
Max Power 300Watt
L: 200 W: 6.5 H: 3.9 cm




For installation instructions go on page 450
For accessories go on page 068-084






RECESS APPLICATION




V-CONNECTOR - 9236105
 Sandy Black Aluminium
 Corner Connector For
 Recess Magnetic Profile
 L: 10.5 W1: 2.3 W2: 6.5 H: 3.9 cm
 Cut Out: 3.45 cm

Compatible with
 code 9136100 & 9136335




V-CONNECTOR - 9999120
 Sandy Black Aluminium
 Corner Connector For
 Recess Magnetic Profile
 L: 10.5 W: 10.5 H: 3.9 cm
 Cut Out: 3.45 cm

Compatible with
 code 9999100 & 9999101



Q-CONNECTOR - 9136303
 Sandy Black Aluminium
 Corner Connector For
 Recess Magnetic Profile
 L: 30.3 W1: 2.3 W2: 6.5 H: 3.9 cm
 Cut Out: 3.45 cm

Compatible with
 code 9136100 & 9136335




Q-CORNER - 9999110
 Sandy Black Aluminium
 Corner Connector For
 Recess Magnetic Profile
 L: 28.7 W: 2.87 H: 3.3 cm
 Cut Out: 3.45 cm

Compatible with
 code 9999100 & 9999101




SURFACE - PENDANT APPLICATION




V-CONNECTOR - 9136105
 Sandy Black Aluminium
 Corner Connector For Surface
 or Pendant Magnetic Profile
 L: 10.5 W1: 2.3 W2: 4.4 H: 3.9 cm

Compatible with
 code 9136101 & 9136338



V-CONNECTOR - 9110024
 Sandy Black Aluminium
 Corner Connector For Surface
 or Pendant Magnetic Profile
 L: 10.5 W: 10.5 H: 3.9 cm

Compatible with
 9110020 & 9110021



Q-CONNECTOR - 9136290
 Sandy Black Aluminium
 Corner Connector For Surface
 or Pendant Magnetic Profile
 L: 29 W1: 2.3 W2: 4.4 H: 3.9 cm

Compatible with
 code 9136101 & 9136338



Q-CORNER - 9110022
 Sandy Black Aluminium
 Corner Connector For Surface
 or Pendant Magnetic Profile
 L: 28.7 W: 2.87 H: 3.3 cm

Compatible with
 9110020 & 9110021




TRACK DRIVER - 9010316

Track Driver 100 Watt
Input: 220-240V AC
Output: 24V
L: 25 W: 2.2 H: 4.2 cm




TRACK DRIVER - 9010317

Track Driver 200 Watt
Input: 220-240V AC
Output: 24V
L: 28.4 W: 2.2 H: 4.2 cm



DRIVER BOX - 9236109

Sandy Black Aluminium
Feeder Box
Driver Included
Power 60W
L: 33 W: 3.9 H: 3.3 cm




Compatible For 9110020 & 9110021



DRIVER BOX - 9236108

Sandy Black Aluminium
Feeder Box
Driver Included
Power 60W
L: 33 W: 4.4 H: 3.8 cm



Compatible For 9136101 & 9136338



DRIVER - 8252019

Philips Driver
60 Watt
Input: 220-240V AC
Output: 24V DC 2.5A
3 Years Warranty



DRIVER - 8252020

Philips Driver
120 Watt
Input 220-240V AC
Output: 24V DC
3 Years Warranty



DRIVER - 8252021

Philips Driver
180 Watt
Input 220-240V AC
Output: 24V DC
3 Years Warranty



DRIVER - 9621508

Meanwell LED Driver 75 Watt
Input: 100-240V AC 3.1A
Output: 24V DC IP67
5 Years Warranty
L: 14 W: 6.3 H: 3.2 cm



DRIVER - 9621509

Meanwell LED Driver 100 Watt
Input: 100-240V AC 4A
Output: 24V DC IP67
5 Years Warranty
L: 14 W: 6.3 H: 3.2 cm



DRIVER - 9621510

Meanwell LED Driver 150 Watt
Input: 100-240V AC 6.25A
Output: 24V DC IP67
5 Years Warranty
L: 18 W: 6.3 H: 3.55 cm



DRIVER - 9621511


Meanwell LED Driver 200 Watt
Input: 100-240V AC 8.3A
Output: 24V DC IP67
5 Years Warranty
L: 19.9 W: 6.3 H: 3.55 cm





POWER CONNECTOR - 9236107

Integrated Wired Power Feed
Used On Magnetic Profile To
Connect The Final Profile With Driver



CONNECTOR - 9236106

Mechanical-Electrical Connector
Used On Recess & Surface Magnetic
Profile To Connect Two Profiles Together
L: 11 W: 2.1 H: 1.4 cm



CAP - 9910010

Sandy Black Aluminium Frame
Magnetic Track



Compatible For 9110020, 9110021



CAP - 9811361

Sandy Black Aluminium
Mechanical Connector
L: 12 W: 0.5 H: 2 cm



KIT B - 9920015

Set Of Accessories For
Magnetic Track Suspend



SCREW - 9811362



CAP - 9999130

Sandy Black Aluminium Frame
Magnetic Track
L: 3.3 W: 0.2 H: 3.9 cm



Compatible For 9999100, 9999101



CAP - 9136110

Sandy Black Aluminium Frame
End Cap For Surface or Pendant
D: 4.4 W: 0.2 H: 3.9 cm



Compatible For 9136338, 9136101



CAP - 9136111

Sandy Black Aluminium Frame
End Cap For Recess Profile Cover
L: 3.3 W: 0.2 H: 3.9 cm



Compatible For 9136100, 9136335



TINT - 9366462
Sandy Black Aluminium
Connector Tube
D: 2.3 H: 10 cm

TINT - 9366461
Sandy Black Aluminium
Connector Tube
With Power Connector
D: 6 H: 10 cm

TINT - 9136323
Sandy Black Aluminium
Connector Tube
D: 2.3 H: 37.3 cm

TINT - 9136360
Sandy Black Aluminium
Connector Tube
With Power Connector
D: 6 H: 37.3 cm

TINT - 9236323
Sandy Black Aluminium
Connector Tube
D: 2.3 H: 70 cm

TINT - 9236360
Sandy Black Aluminium
Connector Tube
With Power Connector
D: 6 H: 70 cm

For installation instructions go on page 453



MAGNETIC DECORATIVE ACCESSORIES



CRI 90



WIDTH FOR ACCESSORIES 2 CM

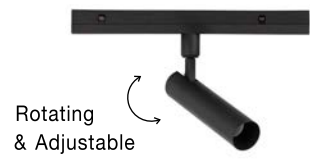


Photo	Code	Material	Watt	Volt	LED Chip	Dimension ^(cm)	Lumen	CRI	UGR	Beam Angle	Kelvin	Protection	Adj.	Driver Included	Dim.	Class
	9136122	Sandy Black Aluminium	15W	DC24V	Osram	D: 16 H: 26	1200	>90	<18	120°	3000K	IP20	√	X	X	III
	9136135	Sandy Black Aluminium	10W	DC24V	Pauray	D: 3.2 H: 19.6	800	>90	<14	35°	3000K	IP20	√	X	X	III
	9136136	Sandy Black Aluminium	20W	DC24V	Cree	D: 6.5 H: 21	1600	>90	<14	35°	3000K	IP20	√	X	X	III
	9136124	Sandy Black Aluminium	15W	DC24V	Philips	L: 24.5 H: 11	1200	>90	<18	30°	3000K	IP20	√	X	X	III
	9136125	Sandy Black Aluminium	15W	DC24V	Philips	L: 24.5 H: 11	1200	>90	<18	120°	3000K	IP20	√	X	X	III
	9070128	Sandy Black Aluminium	2W	DC24V	Philips	L: 3.6 W: 2.2 H: 3	157.5	>90	<19	30°	3000K	IP20	X	X	X	III

*Lifetime: 50.000 hours of usage



CRI
90



Photo	Code	Material	Watt	Volt	LED Chip	Dimension ^(cm)	Lumen	CRI	UGR	Beam Angle	Kelvin	Protection	Adj.	Driver Included	Dim.	Class
	9136120	Sandy Black Aluminium	26W	DC24V	Osram	L: 100 H: 3	2080	>90	<18	120°	3000K	IP20	X	X	X	III
	9136121	Sandy Black Aluminium	13W	DC24V	Osram	L: 50 H: 3	1040	>90	<18	35°	3000K	IP20	X	X	X	III
	9136130	Sandy Black Aluminium	13W	DC24V	Philips	L: 50 H: 3	1040	>90	<14	35°	3000K	IP20	X	X	X	III
	9136131	Sandy Black Aluminium	26W	DC24V	Philips	L: 100 H: 3	2080	>90	<14	30°	3000K	IP20	X	X	X	III
	9136123	Sandy Black Aluminium	38W	DC24V	Osram	L: 150 H: 12	3040	>90	<18	120°	3000K	IP20	✓	X	X	III

*Lifetime: 50.000 hours of usage




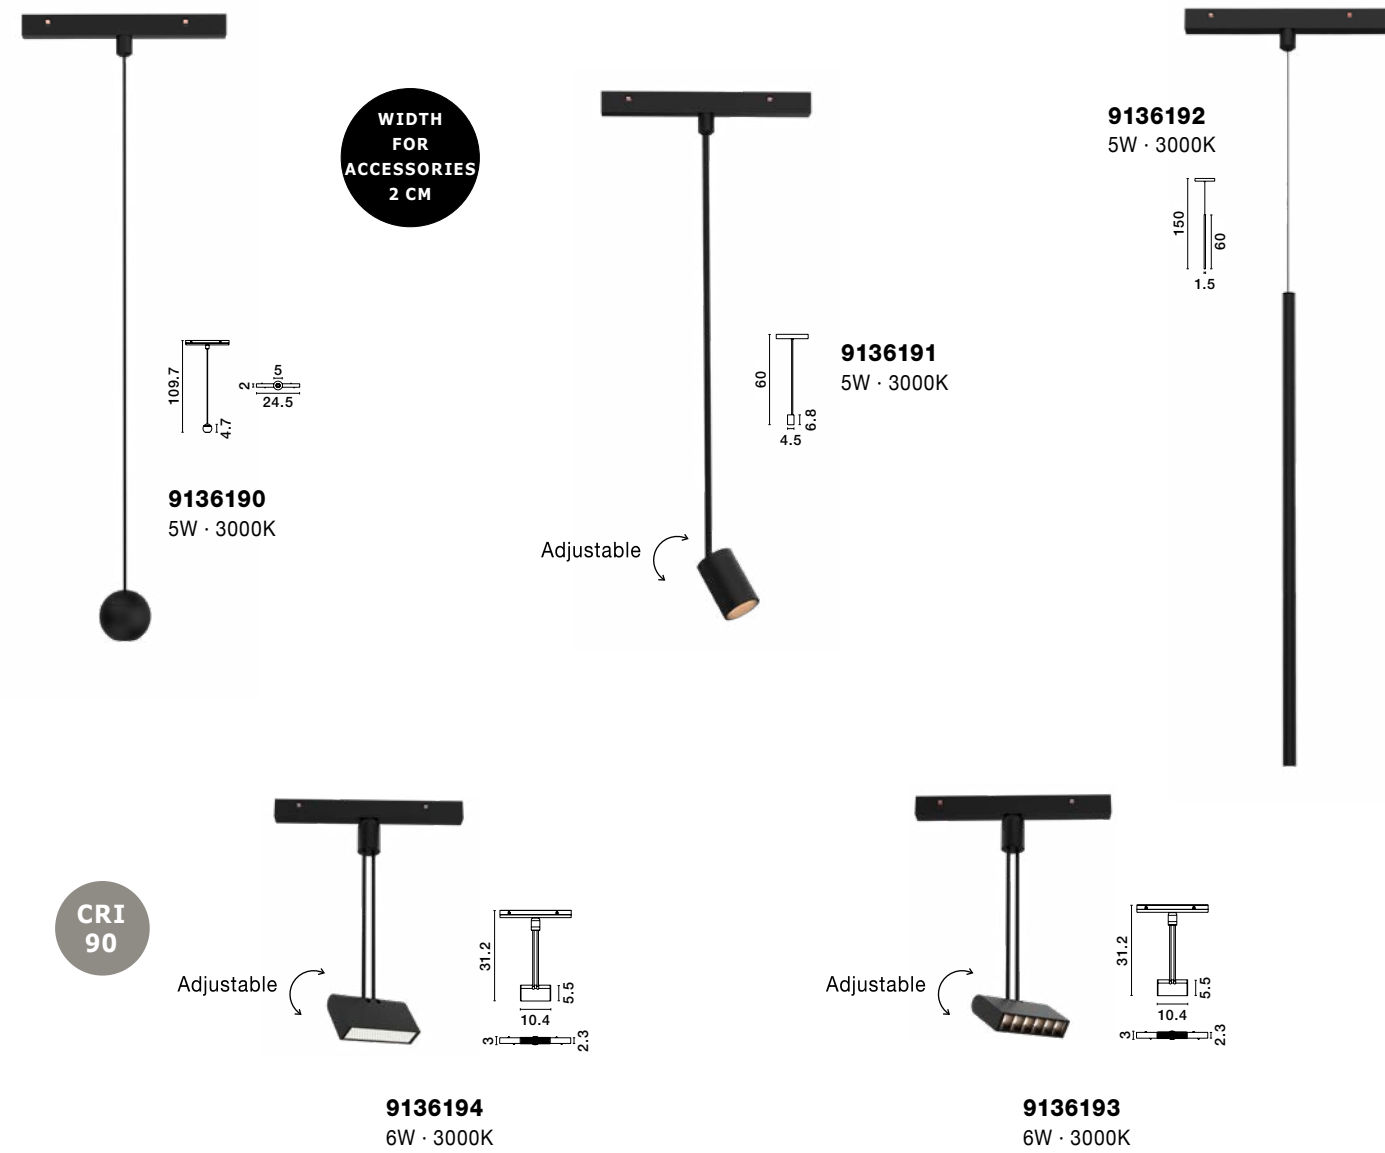


Photo	Code	Material	Watt	Volt	LED Chip	Dimension(≈mm)	Lumen	CRI	UGR	Beam Angle	Kelvin	Protection	Adj.	Driver Included	Dim.	Class
	9136190	Sandy Black Aluminium	5W	DC24V	Cree	D: 5 H: 100	499Lm	>90	<19	15°	3000K	IP20	X	X	X	III
	9136191	Sandy Black Aluminium	5W	DC24V	Bridgelux	D: 4.5 H: 60	444Lm	>90	<16	36°	3000K	IP20	√	X	X	III
	9136192	Sandy Black Aluminium	5W	DC24V	LED TEEN	D: 1.5 H: 60 H2: 150	139Lm	>90	<25	120°	3000K	IP20	X	X	X	III
	9136193	Sandy Black Aluminium	6W	DC24V	Philips	L: 10.4 W: 2.2 H: 5.4 H2: 20	278Lm	>90	<10	30°	3000K	IP20	√	X	X	III
	9136194	Sandy Black Aluminium	6W	DC24V	Philips	L: 10.4 W: 2.2 H: 5.4 H2: 20	175Lm	>90	<25	120°	3000K	IP20	√	X	X	III


*Lifetime: 50.000 hours of usage



TRIAC
Dimmable

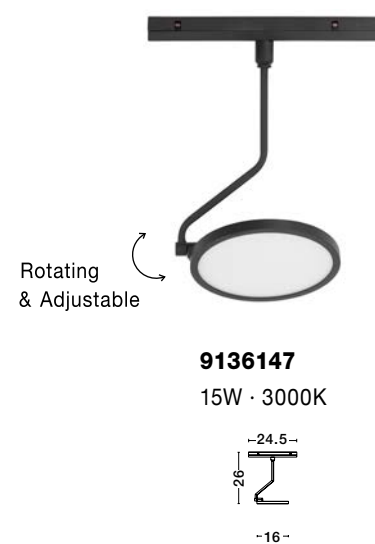

CRI
90

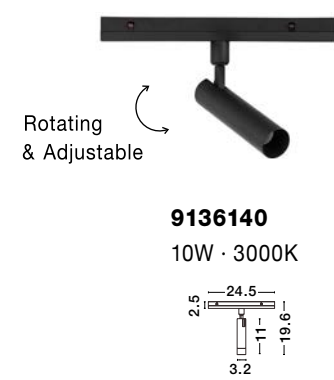

WIDTH
FOR
ACCESSORIES
2 CM



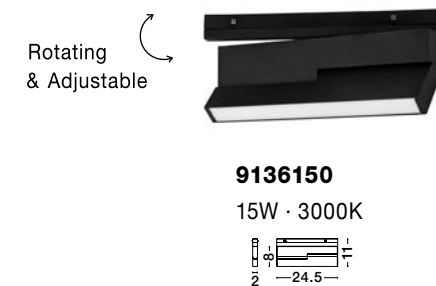


Photo	Code	Material	Watt	Volt	LED Chip	Dimension(cm)	Lumen	CRI	UGR	Beam Angle	Kelvin	Protection	Adj.	Driver Included	Dim.	Class
	9136147	Sandy Black Aluminium	15W	DC48V	Osram	D: 16 H: 26	1200Lm	>90	<18	120°	3000K	IP20	✓	X	✓	III
	9136140	Sandy Black Aluminium	10W	DC48V	Pauray	D: 3.2 H: 19.6	800Lm	>90	<14	35°	3000K	IP20	✓	X	✓	III
	9136142	Sandy Black Aluminium	20W	DC48V	Cree	D: 6.5 H: 21	1600Lm	>90	<14	35°	3000K	IP20	✓	X	✓	III
	9136149	Sandy Black Aluminium	15W	DC48V	Philips	L: 24.5 H: 11	1200Lm	>90	<18	30°	3000K	IP20	✓	X	✓	III
	9136150	Sandy Black Aluminium	15W	DC48V	Philips	L: 24.5 H: 11	1200Lm	>90	<18	120°	3000K	IP20	✓	X	✓	III
	9136141	Sandy Black Aluminium	2x5W	DC48V	Philips	L: 14.4 H1: 10 H2: 16	662Lm	>90	<14	45°	3000K	IP20	✓	X	✓	III

*Lifetime: 50.000 hours of usage


HOW TO CONNECT TRIAC DIMMABLE GO TO PAGE 449

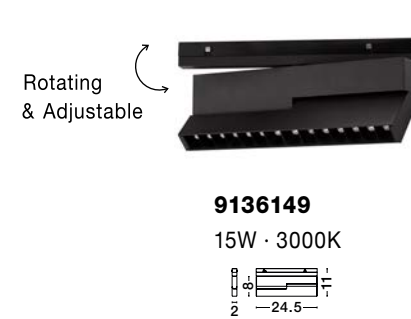

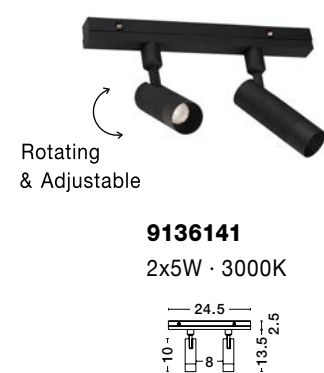


TRIAC Dimmable

CRI 90

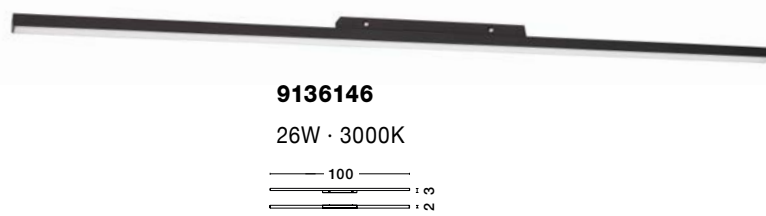

9136146
26W · 3000K

WIDTH FOR ACCESSORIES 2 CM

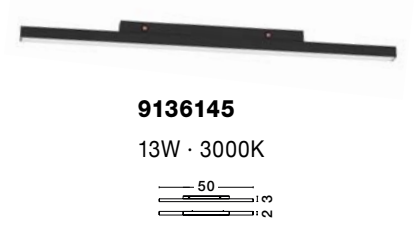

9136145
13W · 3000K



ANTI GLARE NETWORK

9136143
13W · 3000K




ANTI GLARE NETWORK

9136144
26W · 3000K



ROTATING & MOVABLE

9136148
38W · 3000K



DRIVER - 9621503
Meanwell LED Driver 200 Watt
Input: 220-240V AC IP20
Output: 48V DC 4.4A
L: 21.5 W: 11.5 H: 3 cm



TRIAC CONTROLLER - 9136151
Triac Controller 288W
Input: DC 24-48V
Output: DC 4-24V 10A
DC 25-48V 6A
L: 16 W: 4.7 H: 2.2 cm

Photo	Code	Material	Watt	Volt	LED Chip	Dimension(cm)	Lumen	CRI	UGR	Beam Angle	Kelvin	Protection	Adj.	Driver Included	Dim.	Class
	9136146	Sandy Black Aluminium	26W	DC48V	Osram	L: 100 H: 3	2080	>90	<18	120°	3000K	IP20	X	X	√	III
	9136145	Sandy Black Aluminium	13W	DC48V	Osram	L: 50 H: 3	1040	>90	<18	35°	3000K	IP20	X	X	√	III
	9136143	Sandy Black Aluminium	13W	DC48V	Philips	L: 50 H: 3	1040	>90	<14	35°	3000K	IP20	X	X	√	III
	9136144	Sandy Black Aluminium	26W	DC48V	Philips	L: 100 H: 3	2080	>90	<14	30°	3000K	IP20	X	X	√	III
	9136148	Sandy Black Aluminium	38W	DC48V	Osram	L: 150 H: 12	3040	>90	<18	120°	3000K	IP20	√	X	√	III

*Lifetime: 50.000 hours of usage

HOW TO CONNECT TRIAC DIMMABLE GO TO PAGE 449

