

TRACK SYSTEM 3L



01 / **Six**
Six M
Six L

02 / **Plus**
Plus Mini
Plus

03 / **Zen Tube**


04 / **Fit**
Fit 65
Fit 80

05 / **Coco M**

06 / **Thor**

Track 3L

TRACK 3L SURFACE & SUSPENDED




[MORE INFO >>](#)

TRACK 3L 1m	A282-01-00-	B	N
TRACK 3L 2m	A282-02-00-	B	N
TRACK 3L 3m	A282-03-00-	B	N



TRACK 3L FLUSH MOUNTING*



[MORE INFO >>](#)

TRACK 3L FLUSH 1m	A282-11-00-	B	N
TRACK 3L FLUSH 2m	A282-12-00-	B	N
TRACK 3L FLUSH 3m	A282-13-00-	B	N



WEIGHT BEAR CAPACITY

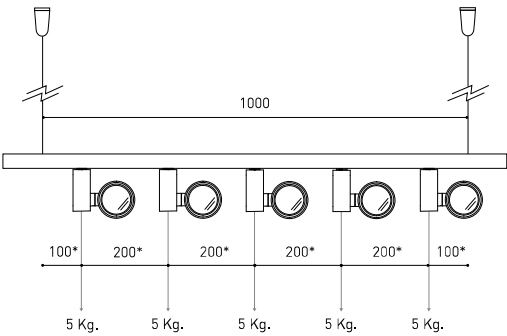
Distancia de fijación y capacidad de carga.
Distancia fijación recomendada I- 1000 mm.

Fastening distance and loading capacity.
Recommended fastening distance I- 1000 mm.

Distance de fixation et capacité de charge.
Distance de fixation recommandée I- 1000 mm.

Distanza di installazione e capacità di carico.
Distanza consigliata di fissazione I- 1000 mm.

Befestigungsabstand und Belastbarkeit.
Empfohlener Abstand I- 1000 mm.




*minimum distance (mm.)

OPTIONAL ACCESSORIES

FIT MODEL: ACCESSORIES ONLY IN BLACK FINISH
SIX MODEL: ACCESSORIES NOT AVAILABLE


TRACKLIGHT Surface Adapter

0000-55-43-	W
0000-55-39-	N




TRACKLIGHT Recessed Adapter

0000-55-44-	W
0000-55-40-	N




SURFACE & SUSPENDED

POLARITY
GROOVE**TRACK 3L Live-End Connector**

A282-00-01- | B | N |


A282-00-02- | B | N |

**TRACK 3L Central Connector**


A282-00-03- | B | N |

**TRACK 3L Fixation Kit**

A219-21-06- | B | N |


**TRACK 3L Universal Angle**

A282-00-15- | B | N |

**TRACK 3L 90° Angle**


A282-00-06- | B | N |

A282-00-07- | B | N |


**TRACK 3L T Joint**

A282-00-16- | B | N |

A282-00-17- | B | N |

**TRACK 3L Mechanical Joint**


A219-21-11- | B | N |

**TRACK 3L Suspension Kit**

A219-21-10- | B | N |

At least 2 units needed

FLUSH MOUNTING*

POLARITY
GROOVE**TRACK 3L Live-End Connector**


A282-00-01- | B | N |

A282-00-02- | B | N |

TRACK 3L FLUSH Cover Plate

A282-10-19- | B | N |

Mandatory for installation

**TRACK 3L Central Connector**

A282-00-03- | B | N |


TRACK 3L FLUSH Cover Plate

A282-10-19- | B | N |

Mandatory for installation

**TRACK 3L FLUSH Ceiling Kit**

A219-22-06- | B |

**TRACK 3L 90° Angle**


A282-00-06- | B | N |

A282-00-07- | B | N |

TRACK 3L FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation

**TRACK 3L T Joint**

A282-00-16- | B | N |


A282-00-17- | B | N |

TRACK 3L FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation

SURFACE & SUSP. / FLUSH MOUNTING

**TRACK Contact Joint**


A282-00-04- | B | N |

**TRACK End**

A219-20-02- | B | N |

**TRACK Clamp Kit for M6 ROD**

A219-21-21- | B |

**TRACK Bending Tool**

A282-00-00

For tracks its length has been modified


COLOUR | B □ | N ■ | W □ |

RAL ⓘ » 392

* RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED
BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)

Track 3L - DIM

TRACK 3L SURFACE & SUSPENDED




MORE INFO >>

TRACK 3L 1m	A219-21-01-	B	N
TRACK 3L 2m	A219-21-02-	B	N
TRACK 3L 3m	A219-21-03-	B	N



TRACK 3L FLUSH MOUNTING*



MORE INFO >>

TRACK 3L FLUSH 1m	A219-22-01-	B	N
TRACK 3L FLUSH 2m	A219-22-02-	B	N
TRACK 3L FLUSH 3m	A219-22-03-	B	N



WEIGHT BEAR CAPACITY

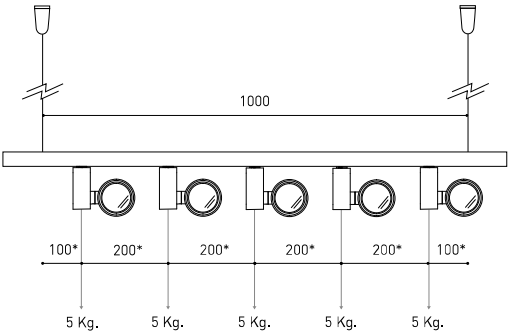
Distancia de fijación y capacidad de carga.
Distancia fijación recomendada I- 1000 mm.

Fastening distance and loading capacity.
Recommended fastening distance I- 1000 mm.

Distance de fixation et capacité de charge.
Distance de fixation recommandée I- 1000 mm.


Distanza di installazione e capacità di carico.
Distanza consigliata di fissazione I- 1000 mm.

Befestigungsabstand und Belastbarkeit.
Empfohlener Abstand I- 1000 mm.




* minimum distance (mm.)

SURFACE & SUSPENDED

POLARITY
GROOVE**TRACK 3L Live-End Connector**

A219-21-04- | B | N |


A219-21-12- | B | N |

**TRACK 3L Central Connector**


A219-21-05- | B | N |

**TRACK 3L Fixation Kit**

A219-21-06- | B | N |


**TRACK 3L Universal Angle**

A219-21-07- | B | N |

**TRACK 3L 90° Angle**


A219-21-08- | B | N |

A219-21-13- | B | N |


**TRACK 3L T Joint**

A219-21-09- | B | N |

A219-21-14- | B | N |

**TRACK 3L Mechanical Joint**


A219-21-11- | B | N |

**TRACK 3L Suspension Kit**

A219-21-10- | B | N |

At least 2 units needed

FLUSH MOUNTING*

POLARITY
GROOVE**TRACK 3L FLUSH Live-End Connector**


A219-21-04- | B | N |

A219-21-12- | B | N |

TRACK 3L FLUSH Cover Plate

A219-22-10- | B | N |

Mandatory for installation

**TRACK 3L FLUSH Central Connector**

A219-21-05- | B | N |


TRACK 3L FLUSH COVER Plate

A219-22-10- | B | N |

Mandatory for installation

**TRACK 3L FLUSH Ceiling Kit**

A219-22-06- | B |

**TRACK 3L FLUSH 90° Angle**


A219-21-08- | B | N |

A219-21-13- | B | N |

TRACK 3L FLUSH Corner Cover Plate

A219-22-11- | B | N |

Mandatory for installation

**TRACK 3L T Joint**

A219-21-09- | B | N |


A219-21-14- | B | N |

TRACK 3L FLUSH Corner Cover Plate

A219-22-11- | B | N |

Mandatory for installation

SURFACE & SUSP. / FLUSH MOUNTING

**TRACK Contact Joint**


A219-20-01- | B | N |

**TRACK End**

A219-20-02- | B | N |

**TRACK Clamp Kit for M6 ROD**

A219-21-21- | B |

**TRACK Bending Tool**

A282-00-00

For tracks its lenght has been modified

COLOUR | B □ | N ■ |

RAL ⓘ » 392

* RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED
BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



MORE INFO >>

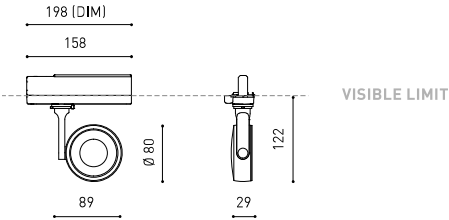
					P	CCT	Beam	I	Flux	LOR
SIX M 1	A331-11-10-	WT NT			11,5W	2700K	19°	350mA	1600 lm	93%
	A331-11-11-	WT NT			11,5W	3000K	19°	350mA	1650 lm	93%
	A331-11-12-	WT NT			11,5W	4000K	19°	350mA	1700 lm	93%
	A331-11-20-	WT NT			11,5W	2700K	28°	350mA	1600 lm	91%
	A331-11-21-	WT NT			11,5W	3000K	28°	350mA	1650 lm	91%
	A331-11-22-	WT NT			11,5W	4000K	28°	350mA	1700 lm	91%
	A331-11-30-	WT NT			11,5W	2700K	38°	350mA	1600 lm	93%
	A331-11-31-	WT NT			11,5W	3000K	38°	350mA	1650 lm	93%
	A331-11-32-	WT NT			11,5W	4000K	38°	350mA	1700 lm	93%
SIX M 2	A331-2- Ⓞ -10-	WT NT			17W	2700K	19°	500mA	2050 lm	93%
	A331-2- Ⓞ -11-	WT NT			17W	3000K	19°	500mA	2130 lm	93%
	A331-2- Ⓞ -12-	WT NT			17W	4000K	19°	500mA	2160 lm	93%
	A331-2- Ⓞ -20-	WT NT			17W	2700K	28°	500mA	2050 lm	91%
	A331-2- Ⓞ -21-	WT NT			17W	3000K	28°	500mA	2130 lm	91%
	A331-2- Ⓞ -22-	WT NT			17W	4000K	28°	500mA	2160 lm	91%
	A331-2- Ⓞ -30-	WT NT			17W	2700K	38°	500mA	2050 lm	93%
	A331-2- Ⓞ -31-	WT NT			17W	3000K	38°	500mA	2130 lm	93%
	A331-2- Ⓞ -32-	WT NT			17W	4000K	38°	500mA	2160 lm	93%

220 240 V~ |  IP20 | CRI>90 | L90B10 > 55.000 h



Ⓞ	*OPTIONS
1	No DIM
2	DIM DALI

OPTIONAL
SIX M High Chromatic LED  » 361
NOT SOLD SEPARATELY
AFFECTS THE LIGHTING PARAMETERS



COLOUR | WT  | NT  | MATERIAL |  AL |  PC |

TRACK 3L  » 276

 » 370



MORE INFO >>

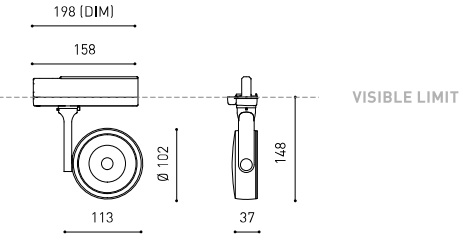
					P	CCT	Beam	I	Flux	LOR
SIX L 1	A286-11-10-	WT NT			11,5W	2700K	17°	350mA	1600 lm	93%
	A286-11-11-	WT NT			11,5W	3000K	17°	350mA	1650 lm	93%
	A286-11-12-	WT NT			11,5W	4000K	17°	350mA	1700 lm	93%
	A286-11-30-	WT NT			11,5W	2700K	26°	350mA	1600 lm	93%
	A286-11-31-	WT NT			11,5W	3000K	26°	350mA	1650 lm	93%
	A286-11-32-	WT NT			11,5W	4000K	26°	350mA	1700 lm	93%
	A286-11-20-	WT NT			11,5W	2700K	34°	350mA	1600 lm	90%
	A286-11-21-	WT NT			11,5W	3000K	34°	350mA	1650 lm	90%
	A286-11-22-	WT NT			11,5W	4000K	34°	350mA	1700 lm	90%
SIX L 2	A286-2- ☉ -10-	WT NT			24,5W	2700K	17°	700mA	2850 lm	93%
	A286-2- ☉ -11-	WT NT			24,5W	3000K	17°	700mA	2950 lm	93%
	A286-2- ☉ -12-	WT NT			24,5W	4000K	17°	700mA	3000 lm	93%
	A286-2- ☉ -30-	WT NT			24,5W	2700K	26°	700mA	2850 lm	93%
	A286-2- ☉ -31-	WT NT			24,5W	3000K	26°	700mA	2950 lm	93%
	A286-2- ☉ -32-	WT NT			24,5W	4000K	26°	700mA	3000 lm	93%
	A286-2- ☉ -20-	WT NT			24,5W	2700K	34°	700mA	2850 lm	90%
	A286-2- ☉ -21-	WT NT			24,5W	3000K	34°	700mA	2950 lm	90%
	A286-2- ☉ -22-	WT NT			24,5W	4000K	34°	700mA	3000 lm	90%

220 V~ | IP20 | CRI>90 | L90B10 > 55.000 h



☉	*OPTIONS
1	No DIM
4	DIM DALI

OPTIONAL
SIX L High Chromatic LED » 361
NOT SOLD SEPARATELY AFFECTS THE LIGHTING PARAMETERS



COLOUR | WT | NT | MATERIAL | AL | PC |

TRACK 3L » 276

» 370

TRACK 3L
Coco M



MORE INFO >>

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS
NOT SOLD SEPARATELY

COCO M Anti-glare Honeycomb Louver

A553-90-00- | WT | NT |



COCO M Anti-glare Screen

A553-90-01- | WT | NT |



COCO M Linear Filter

A553-90-02- | WT | NT |



SUITABLE FOR BEAM ≤ 32°

COCO M High Chromatic Led ⓘ » 361

		P	CCT	Beam	I	Flux	LOR
COCO M 3L	A554-0- Ⓞ -10- WT NT	11,6W	2700K	32°	350mA	2080 lm	81%
	A554-0- Ⓞ -11- WT NT	11,6W	3000K	32°	350mA	2160 lm	81%
	A554-0- Ⓞ -13- WT NT	11,6W	3500K	32°	350mA	2190 lm	81%
	A554-0- Ⓞ -12- WT NT	11,6W	4000K	32°	350mA	2200 lm	81%
	A554-0- Ⓞ -20- WT NT	11,6W	2700K	43°	350mA	2080 lm	86%
	A554-0- Ⓞ -21- WT NT	11,6W	3000K	43°	350mA	2160 lm	86%
	A554-0- Ⓞ -23- WT NT	11,6W	3500K	43°	350mA	2190 lm	86%
	A554-0- Ⓞ -22- WT NT	11,6W	4000K	43°	350mA	2200 lm	86%
	A554-0- Ⓞ -30- WT NT	11,6W	2700K	53°	350mA	2080 lm	86%
	A554-0- Ⓞ -31- WT NT	11,6W	3000K	53°	350mA	2160 lm	86%
	A554-0- Ⓞ -33- WT NT	11,6W	3500K	53°	350mA	2190 lm	86%
	A554-0- Ⓞ -32- WT NT	11,6W	4000K	53°	350mA	2200 lm	86%

220
240 V~ | IP20 | CRI>90 | L80B10
> 66.000 h



		P	CCT	Beam	I	Flux	LOR
COCO M 3L Super Spot	A554-0- Ⓞ -00- WT NT	8,7W	2700K	13°	500mA	1230 lm	67%
	A554-0- Ⓞ -01- WT NT	8,7W	3000K	13°	500mA	1300 lm	67%
	A554-0- Ⓞ -03- WT NT	8,7W	3500K	13°	500mA	1360 lm	67%
	A554-0- Ⓞ -02- WT NT	8,7W	4000K	13°	500mA	1400 lm	67%

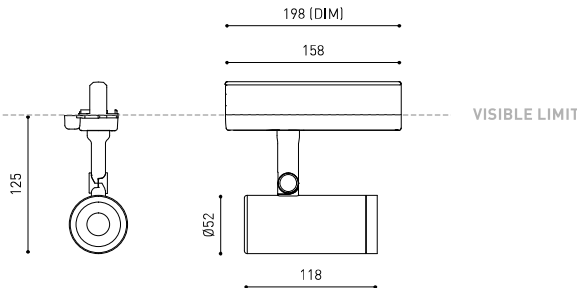
220
240 V~ | IP20 | CRI>90 | L80B10
> 66.000 h



Ⓞ *OPTIONS

1	No DIM
2	DIM DALI

OTHER DIM OPTIONS PLEASE CONSULT



COLOUR | NT ■ | WT □ |

MATERIAL | AL | PC/PMMA |

TRACK 3L ⓘ » 276

OTHER CCT OPTIONS PLEASE CONSULT

Ⓞ » 370

TRACK 3L
Fit



MORE INFO >>

			P	CCT	Beam	I	Flux	LOR
FIT 65	A356-01-11-	WT NT	10,3W	3000K	18°	300mA	1300 lm	90%
	A356-01-12-	WT NT	10,3W	4000K	18°	300mA	1320 lm	90%
	A356-01-21-	WT NT	10,3W	3000K	26°	300mA	1300 lm	88%
	A356-01-22-	WT NT	10,3W	4000K	26°	300mA	1320 lm	88%
	A356-01-31-	WT NT	10,3W	3000K	36°	300mA	1300 lm	84%
	A356-01-32-	WT NT	10,3W	4000K	36°	300mA	1320 lm	84%

220 V~ | IP20 | CRI>90 | L90B10 >55.000 h | MacAdam Step 2 | INCL | TRACK 3L | 360° | 90° | 18°/26°/36°

			P	CCT	Beam	I	Flux	LOR
FIT 65	A356-02-11-	WT NT	10,3W	3000K	18°	300mA	1300 lm	90%
	A356-02-12-	WT NT	10,3W	4000K	18°	300mA	1320 lm	90%
	A356-02-21-	WT NT	10,3W	3000K	26°	300mA	1300 lm	88%
	A356-02-22-	WT NT	10,3W	4000K	26°	300mA	1320 lm	88%
	A356-02-31-	WT NT	10,3W	3000K	36°	300mA	1300 lm	84%
	A356-02-32-	WT NT	10,3W	4000K	36°	300mA	1320 lm	84%

220 V~ | IP20 | CRI>90 | L90B10 >55.000 h | MacAdam Step 2 | DALI | INCL | TRACK 3L | 360° | 90° | 18°/26°/36°



MORE INFO >>

			P	CCT	Beam	I	Flux	LOR
FIT 80	A357-0- ∞ -11-	WT NT	19W	3000K	19°	550mA	2500 lm	90%
	A357-0- ∞ -12-	WT NT	19W	4000K	19°	550mA	2540 lm	90%
	A357-0- ∞ -21-	WT NT	19W	3000K	28°	550mA	2500 lm	84%
	A357-0- ∞ -22-	WT NT	19W	4000K	28°	550mA	2540 lm	84%
	A357-0- ∞ -31-	WT NT	19W	3000K	37°	550mA	2500 lm	85%
	A357-0- ∞ -32-	WT NT	19W	4000K	37°	550mA	2540 lm	85%

220 V~ | IP20 | CRI>90 | L90B10 >55.000 h | MacAdam Step 2 | OPTIONS* | INCL | TRACK 3L | 360° | 90° | 19°/28°/37°

∞ *OPTIONS

1	No DIM
2	DIM DALI

OPTIONAL ACCESSORIES

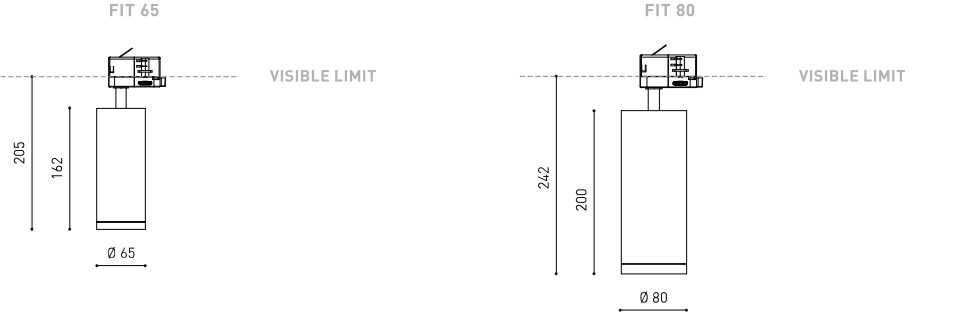
FIT65 Anti-glare Honeycomb Louver

A356-00-00

FIT 80 Anti-glare Honeycomb Louver

A357-00-00

NOT SOLD SEPARATELY
AFFECT THE LIGHTING PARAMETERS



COLOUR | WT | NT | MATERIAL | AL | PC | TRACK 3L » 276

» 370



TRACK 3L
Plus



MORE INFO >>



MORE INFO >>

				P	CCT	Beam	I	Flux	LOR
PLUS Mini	A327-00-10-	WT	NT	4,5W	2700K	10°-41°	500mA	480 lm	20-40%
	A327-00-11-	WT	NT	4,5W	3000K	10°-41°	500mA	500 lm	20-40%
	A327-00-12-	WT	NT	4,5W	4000K	10°-41°	500mA	515 lm	20-40%

220
240 V~

IP20

CRI>90

L90B10
> 55.000 h

MacAdam
Step 2

INCL

TRACK 3L

350°

180°

10°-41°

				P	CCT	Beam	I	Flux	LOR
PLUS	A324-00-00-	WT	NT	10,4W	2700K	12°-51°	300mA	1260 lm	26-40%
	A324-00-01-	WT	NT	10,4W	3000K	12°-51°	300mA	1310 lm	26-40%
	A324-00-02-	WT	NT	10,4W	4000K	12°-51°	300mA	1330 lm	26-40%

220
240 V~

IP20

CRI>90

L90B10
> 55.000 h

MacAdam
Step 2

INCL

TRACK 3L

350°

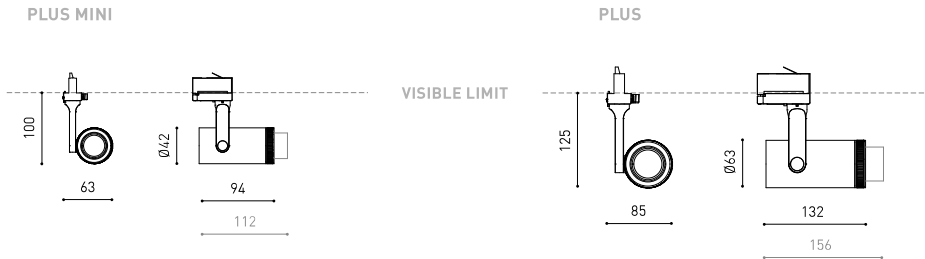
180°

12°-51°

OPTIONAL

PLUS MINI High Chromatic LED		>> 361
PLUS High Chromatic LED		>> 361

NOT SOLD SEPARATELY
AFFECT THE LIGHTING PARAMETERS



COLOUR | WT ☐ | NT ☒ | MATERIAL | AL | OPTICAL GLASS | TRACK 3L >> 276

>> 370

TRACK 3L
Zen Tube



MORE INFO >>

		P	CCT	I	Flux	LOR
ZEN TUBE 1	A284-21- ☉ -1- WT NT	12W	3000K	350mA	1640 lm	90%
	A284-21- ☉ -2- WT NT	12W	4000K	350mA	1670 lm	90%
ZEN TUBE 2	A284-22- ☉ -1- WT NT	17W	3000K	500mA	2220 lm	90%
	A284-22- ☉ -2- WT NT	17W	4000K	500mA	2250 lm	90%
ZEN TUBE 3	A284-23- ☉ -1- WT NT	23W	3000K	700mA	3190 lm	90%
	A284-23- ☉ -2- WT NT	23W	4000K	700mA	3240 lm	90%

220
240 V~ | IP20 | CRI>90 | L90B10
>55.000 h



☉ BEAM OPTIONS

1	16°
2	24°
3	42°

OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY
AFFECT THE LIGHTING PARAMETERS

ZEN Anti-glare Honeycomb Louver 0702-02-00



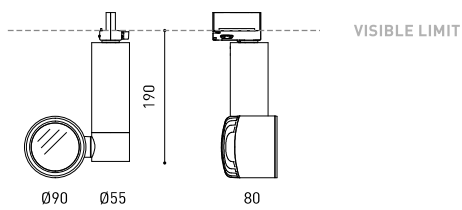
ZEN Elliptical Refractor 0700-08-00



ZEN Beam Mixer Diffuser 0805-02-00



ZEN High Chromatic LED » 361



COLOUR | WT | NT |

MATERIAL | AL | GL-TRANS |

TRACK 3L » 276

OTHER CCT PLEASE CONSULT

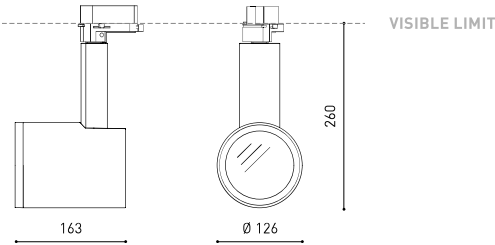
» 370



MORE INFO >>

						P	CCT	I	Flux	LOR	
THOR 1	A226-11-	☹	-1-	WT NT		27W	3000K	800mA	3750 lm	90%	
	A226-11-	☹	-2-	WT NT		27W	4000K	800mA	3820 lm	90%	
THOR 2	A226-21-	☹	-1-	WT NT		36W	3000K	1050mA	4750 lm	90%	
	A226-21-	☹	-2-	WT NT		36W	4000K	1050mA	4820 lm	90%	
		A226-24-	☹	-1-	WT NT		36W	3000K	1050mA	4750 lm	90%
		A226-24-	☹	-2-	WT NT		36W	4000K	1050mA	4820 lm	90%

220
240 V~ | IP20 | CRI>90 | L90B10
> 55.000 h



①	BEAM OPTIONS
1	17°
2	28°
3	40°

OPTIONAL ACCESSORIES

AFFECT THE LIGHTING PARAMETERS

THOR Anti-glare Screen	0802-00-00- WT
	0802-00-00- NT



THOR Beam Mixer Diffuser	0805-03-00
--------------------------	------------



NOT SOLD SEPARATELY

THOR Anti-glare Honeycomb Louver	0802-02-00
----------------------------------	------------



NOT SOLD SEPARATELY



THOR Elliptical Refractor	0802-04-00
---------------------------	------------



NOT SOLD SEPARATELY

THOR High Chromatic Led	① » 361
-------------------------	---------

NOT SOLD SEPARATELY

COLOUR | WT □ | NT ■ | MATERIAL | AL | GL-TRANS |

TRACK 3L ① » 276

OTHER CCT PLEASE CONSULT

① » 370