

01

02

03

TRACK SYSTEM

Track 1L

01 / iO


02 / Plus mini 1L

03 / Fit 65 1L


SURFACE & SUSPENDED



MORE INFO >>



TRACK 1L 1m	A264-01-00- B N
TRACK 1L 2m	A264-02-00- B N
TRACK 1L 3m	A264-03-00- B N




POLARITY
GROOVE




TRACK 1L Live-End Connector

A264-00-01- B N
A264-00-02- B N



TRACK 1L Contact Joint

A264-00-04- B N




TRACK 1L Central Connector

A264-00-03- B N




TRACK 1L End

A264-00-13- B N



TRACK 1L 90° Angle


A264-00-06- B N
A264-00-07- B N



TRACK 1L Suspension Kit


A264-00-14- WT NT

At least 2 units needed




TRACK 1L Corner Connector

A264-00-15- B N



TRACK 1L T-Joint

A264-00-16- B N
A264-00-17- B N

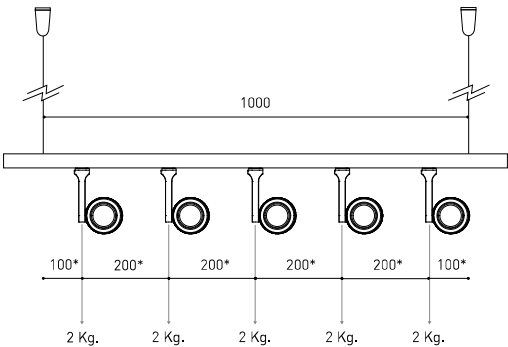

*minimum distance (mm.)


COLOUR | B ☐ | N ☒ | WT ☐ | NT ☒ |

RAL » 392


FLUSH MOUNTING



MORE INFO >>




TRACK 1L FLUSH 1m	A264-11-00- B N
TRACK 1L FLUSH 2m	A264-12-00- B N
TRACK 1L FLUSH 3m	A264-13-00- B N




TRACK 1L FLUSH Live-End Connector
A264-00-01- B N
A264-00-02- B N

TRACK 1L FLUSH Cover Plate
A264-10-19- B N
Mandatory for installation




TRACK 1L FLUSH Central Connector
A264-00-03- B N

TRACK 1L FLUSH Corner Cover Plate
A264-10-20- B N
Mandatory for installation




TRACK 1L FLUSH 90° Angle
A264-00-06- B N
A264-00-07- B N

TRACK 1L FLUSH Corner Cover Plate
A264-10-20- B N
Mandatory for installation



TRACK 1L FLUSH T-Joint
A264-00-16- B N
A264-00-17- B N

TRACK 1L FLUSH Corner Cover Plate
A264-10-20- B N
Mandatory for installation




TRACK 1L Contact Joint
A264-00-04- B N



TRACK 1L End
A264-00-13- B N



TRACK 1L FLUSH Suspension Kit
A264-10-15
For wire 1,5 mm (Not Included)

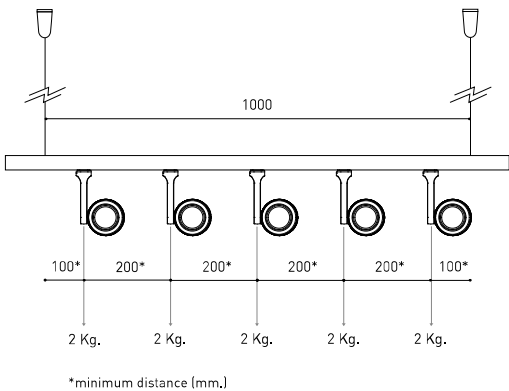

COLOUR | B □ | N ■ |

RAL ⓘ » 392

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)



MORE INFO >>

				P	CCT	Beam	I	Flux	LOR
iO	A262-00-10-	WT	NT	4,5W	2700K	20°	500mA	485 lm	92%
	A262-00-11-	WT	NT	4,5W	3000K	20°	500mA	505 lm	92%
	A262-00-13-	WT	NT	4,5W	3500K	20°	500mA	515 lm	92%
	A262-00-12-	WT	NT	4,5W	4000K	20°	500mA	520 lm	92%
	A262-00-20-	WT	NT	4,5W	2700K	30°	500mA	485 lm	89%
	A262-00-21-	WT	NT	4,5W	3000K	30°	500mA	505 lm	89%
	A262-00-23-	WT	NT	4,5W	3500K	30°	500mA	515 lm	89%
	A262-00-22-	WT	NT	4,5W	4000K	30°	500mA	520 lm	89%
	A262-00-30-	WT	NT	4,5W	2700K	56°	500mA	485 lm	86%
	A262-00-31-	WT	NT	4,5W	3000K	56°	500mA	505 lm	86%
	A262-00-33-	WT	NT	4,5W	3500K	56°	500mA	515 lm	86%
	A262-00-32-	WT	NT	4,5W	4000K	56°	500mA	520 lm	86%

220-240 V~ | IP20 | CRI>90 | L90B10 > 55.000 h



OPTIONAL ACCESSORIES

NOT SOLD SEPARATELY
AFFECTS THE LIGHTING PARAMETERS


iO Beam Mixer Diffuser 0805-01-00



iO Anti-glare Honeycomb Louver 0806-00-00 | WT | NT |



iO High Chromatic LED >> 361

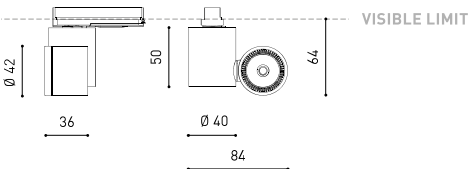

COLOUR | WT | NT | MATERIAL | AL | PC |

TRACK 1L >> 272

TRACK 1L

Plus Mini 1L



MORE INFO >>

				P	CCT	Beam	I	Flux	LOR
PLUS Mini 1L	A327-00-20-	WT	NT	4,5W	2700K	10°-41°	500mA	480 lm	20-40%
	A327-00-21-	WT	NT	4,5W	3000K	10°-41°	500mA	500 lm	20-40%
	A327-00-22-	WT	NT	4,5W	4000K	10°-41°	500mA	515 lm	20-40%

220
240 V~ | IP20 | CRI>90 | L90B10
> 55.000 h




OPTIONAL

PLUS MINI High Chromatic LED

» 361

NOT SOLD SEPARATELY
AFFECTS THE LIGHTING PARAMETERS



VISIBLE LIMIT

MINIMAL TRACK

Fit 65 1L



MORE INFO >>

				P	CCT	Beam	I	Flux	LOR
FIT 65 1L	A366-01-11-	WT	NT	10,3W	3000K	18°	300mA	1300 lm	90%
	A366-01-12-	WT	NT	10,3W	4000K	18°	300mA	1320 lm	90%
	A366-01-21-	WT	NT	10,3W	3000K	26°	300mA	1300 lm	88%
	A366-01-22-	WT	NT	10,3W	4000K	26°	300mA	1320 lm	88%
	A366-01-31-	WT	NT	10,3W	3000K	36°	300mA	1300 lm	84%
	A366-01-32-	WT	NT	10,3W	4000K	36°	300mA	1320 lm	84%

220
240 V~ | IP20 | CRI>90 | L90B10
> 55.000 h




OPTIONAL ACCESSORY

FIT 65 Anti-glare Honeycomb Louver

A356-00-00

NOT SOLD SEPARATELY
AFFECTS THE LIGHTING PARAMETERS



VISIBLE LIMIT



COLOUR | WT ☐ | NT ☒ |

MATERIAL | AL | OPTICAL PMMA |

TRACK 1L » 272

COLOUR | WT ☐ | NT ☒ |

MATERIAL | AL | PC |