




Dimensions:

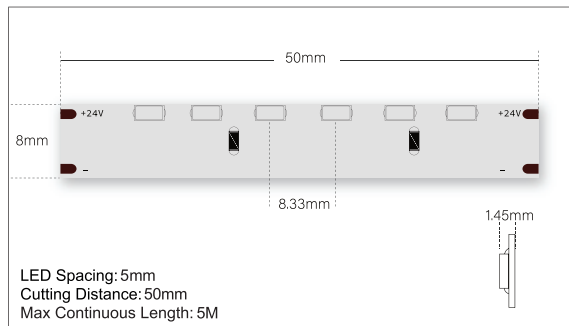


Output:

Delivered Lumens	800lm / 869lm / 869lm
CCT	3000K / 4000K / 6000K
Chromaticity Ordinates	x: 0.4438 y: 0.4275 u: 0.2451 v: 0.5312
Color Bin Tolerance	+ 3% / - 3%
Efficacy (lm/w)	81-91
CRI	82
Lumen Maintenance	50,000 Hours L70 @ 25°C
Testing Data	Light Data LM-79-08 & LM-80-08

Polar Candela Distribution:

Data Shown for 120°



Lumens per Zone:

Zone	Lumens	% Total
0-10	3.80	3.27%
10-20	10.89	9.36%
20-30	16.53	14.21%
30-40	19.95	17.15%
40-50	20.70	17.80%
50-60	18.74	16.11%
60-70	14.27	12.27%
70-80	8.20	7.05%
80-90	2.77	2.38%
90-100	0.42	0.36%

Electrical:

Input Voltage	24v DC
Power Consumption	10W (0.4A)
Power Factor	N/A
Dimming	100-277v 0-10v & Magnetic Low Voltage
Emergency	N/A

Physical:

Applications	Cabinet, Cove, Display, Niches, Perimeter Lighting
Dimensions	5m 10mm 2.5mm
Weight	1.3 lbs (589g) Per Reel
Construction	Constant Voltage Design Protects LEDs And Prolongs Life. White FPCB
Thermal Management	N/A
Optics	N/A
Fixture Connections	Push To Fit Connectors
Operating Temperature	-20°C ~ 45°C
Storage Temperature	-25°C ~ 65°C
Humidity	0-95% Non Condensing