

## KUBO12-S - KUBO12-S RGBW



10° FASCIO STRETTO - NARROW BEAM

38° FASCIO MEDIO - MEDIUM BEAM

56° FASCIO LARGO - LARGE BEAM

20° FASCIO STRETTO - NARROW BEAM

32° FASCIO MEDIO - MEDIUM BEAM

50° FASCIO LARGO - LARGE BEAM

### KUBO12-S FLOODLIGHT

H 170 L140 W125

H 476 L140 W125



### KUBO12-S FLOODLIGHT

H 170 L140 W125

H 476 L140 W125

10° FASCIO STRETTO - NARROW BEAM

20° FASCIO MEDIO - MEDIUM BEAM

30° FASCIO LARGO - LARGE BEAM

60° FASCIO SUPER LARGO - SUPER WIDE BEAM

Proiettori  
Kubo family

00

01

10

24

25

30

35

40



### KUBO12 RECESSED

PAG. 122







# KUB012-S FLOODLIGHT

## DATI TECNICI Technical Data

### INSTALLAZIONE

Installazione a parete, soffitto, fissaggio a terra

### PROTEZIONE

IP 66 - IK 07

### CORPO

Alluminio pressofuso

### SCHERMO

Vetro extrachiario temperato da 4 mm serigrafato

### GUARNIZIONI

Gomma EPDM a celle chiuse

### VITERIA

Acciaio Inox A2

### VERNICIATURA / FINITURA

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

### ASSEMBLY / USAGE

Wall, ceiling and stand installation

### PROTECTION

IP 66 - IK 07

### BODY

Die-cast aluminium

### SCREEN

Tempered extra-clear glass 4mm with silk-screen printing

### SEALS

Closed-cell EPDM rubber

### SCREWS

Stainless steel A2

### PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

### Versione led cob

**NB** 10° FASCIO STRETTO - NARROW BEAM

**MB** 38° FASCIO MEDIO - MEDIUM BEAM

**WB** 56° FASCIO LARGO - LARGE BEAM

### Versione led array

**NB** 20° FASCIO STRETTO - NARROW BEAM

**MB** 42° FASCIO MEDIO - MEDIUM BEAM

**WB** 50° FASCIO LARGO - LARGE BEAM

### Versione RGBW


**NB** 10° FASCIO STRETTO - NARROW BEAM

**MB** 20° FASCIO MEDIO - MEDIUM BEAM

**WB** 30° FASCIO LARGO - LARGE BEAM


**SW** 60° FASCIO SUPER LARGO - SUPER WIDE BEAM

3000K - 4000K  
RGBW

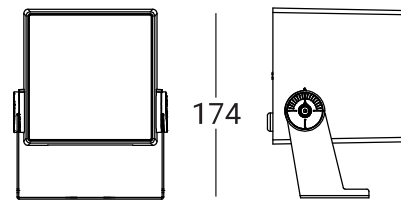



140

174



130

2113W



**NB** 10° FASCIO STRETTO - NARROW BEAM



**MB** 20° FASCIO MEDIO - MEDIUM BEAM

**WB** 30° FASCIO LARGO - LARGE BEAM

**SW** 60° FASCIO SUPER LARGO - SUPER WIDE BEAM

140

130




480

306

200

2113P





# KUB012-S FLOODLIGHT


## Proiettore Orientabile - Driver incorporato / Adjustable Projector - Built-in driver

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>2113W/WC35NB</b>	Orientabile Spot/10° Adjustable Floodlight Spot/10°	14W	1586 lm	1440 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113W/WC35MB</b>	Orientabile Medio/38° Adjustable Floodlight Flood/38°	14W	1586 lm	1446 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113W/WC35WB</b>	Orientabile Largo/56° Adjustable Floodlight Wide Flood/56°	14W	1586 lm	1332 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113W/NC35NB</b>	Orientabile Spot/10° Adjustable Floodlight Spot/10°	14W	1650 lm	1498 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113W/NC35MB</b>	Orientabile Medio/38° Adjustable Floodlight Flood/38°	14W	1650 lm	1504 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113W/NC35WB</b>	Orientabile Largo/56° Adjustable Floodlight Wide Flood/56°	14W	1650 lm	1386 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

<b>AC2112</b>	Visiera in acciaio verniciato Painted steel visor	<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²
<b>AB2112</b>	Braccio per estensione a Parete/Soffitto L=500mm Extension Arm for Wall/Ceiling L=500mm	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm² IP68 Connector 2way/3Poles 3x2.5mm²	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30




## Proiettore con Picchetto - Driver incorporato / Projector with Spike - Built-in driver

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>2113P/WC35NB</b>	Orientabile Spot/10° Adjustable Floodlight Spot/10°	14W	1586 lm	1440 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113P/WC35MB</b>	Orientabile Medio/38° Adjustable Floodlight Flood/38°	14W	1586 lm	1446 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113P/WC35WB</b>	Orientabile Largo/56° Adjustable Floodlight Wide Flood/56°	14W	1586 lm	1332 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113P/NC35NB</b>	Orientabile Spot/10° Adjustable Floodlight Spot/10°	14W	1650 lm	1498 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113P/NC35MB</b>	Orientabile Medio/38° Adjustable Floodlight Flood/38°	14W	1650 lm	1504 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113P/NC35WB</b>	Orientabile Largo/56° Adjustable Floodlight Wide Flood/56°	14W	1650 lm	1386 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

<b>AC2112</b>	Visiera in acciaio verniciato Painted steel visor	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm² IP68 Connector 2way/3Poles 3x2.5mm²	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²		



# KUBO12-S FLOODLIGHT


## Proiettore Orientabile LED ARRAY-Driver incorporato / Adjustable Projector LED ARRAY-Built-in driver

Codice Code	Fascio Beam	*	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>2113W/WR50NB</b>	Orientabile Spot/20° Adjustable Floodlight Spot/20°		14W	1700 lm	1190 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113W/WR50MB</b>	Orientabile Medio/32° Adjustable Floodlight Flood/32°		14W	1700 lm	1190 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113W/WR50WB</b>	Orientabile Largo/50° Adjustable Floodlight Wide Flood/50°		14W	1700 lm	1190 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113W/NR50NB</b>	Orientabile Spot/20° Adjustable Floodlight Spot/20°		14W	1770 lm	1240 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113W/NR50MB</b>	Orientabile Medio/32° Adjustable Floodlight Flood/32°		14W	1770 lm	1240 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113W/NR50WB</b>	Orientabile Largo/50° Adjustable Floodlight Wide Flood/50°		14W	1770 lm	1240 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

<b>AC2112</b>	Visiera in acciaio verniciato Painted steel visor	<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²
<b>AB2112</b>	Braccio per estensione a Parete/Soffitto L=500mm Extension Arm for Wall/Ceiling L=500mm	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm² IP68 Connector 2way/3Poles 3x2.5mm²	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30



## Proiettore con Picchetto LED ARRAY-Driver incorporato / Projector with Spike LED ARRAY-Built-in driver

Codice Code	Fascio Beam	Watt	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>2113P/WR50NB</b>	Orientabile Spot/20° Adjustable Floodlight Spot/20°	14W	1700 lm	1190 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113P/WR50MB</b>	Orientabile Medio/32° Adjustable Floodlight Flood/32°32°	14W	1700 lm	1190 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113P/WR50WB</b>	Orientabile Largo/50° Adjustable Floodlight Wide Flood/50°	14W	1700 lm	1190 lm	220-240Vac 50/60Hz	3000K	I	66	07	>80
<b>2113P/NR50NB</b>	Orientabile Spot/20° Adjustable Floodlight Spot/20°	14W	1770 lm	1240 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113P/NR50MB</b>	Orientabile Medio/32° Adjustable Floodlight Flood/32°	14W	1770 lm	1240 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80
<b>2113P/NR50WB</b>	Orientabile Largo/50° Adjustable Floodlight Wide Flood/50°	14W	1770 lm	1240 lm	220-240Vac 50/60Hz	4000K	I	66	07	>80


Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: DALI disponibile su richiesta / Dimming: DALI available on request

<b>AC2112</b>	Visiera in acciaio verniciato Painted steel visor	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>MOR683P/2V</b>	Connettore IP68 2Vie/3Poli 3x2.5mm² IP68 Connector 2way/3Poles 3x2.5mm²	<b>E.TRA.580</b>	Surge Protector CL I - IP67 L37xW30xH30
<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²		







# KUB012-S FLOODLIGHT


## Proiettore Orientabile RGBW-Driver remoto 24Vdc / Adjustable Projector RGBW-Remote driver 24Vdc

Codice Code	Fascio Beam	* Watt with Algorithm	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>2113W/RCRCNB</b>	Orientabile Spot/10° Adjustable Floodlight Spot/10°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW
<b>2113W/RCRCMB</b>	Orientabile Medio/20° Adjustable Floodlight Flood/20°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW
<b>2113W/RCRCWB</b>	Orientabile Largo/30° Adjustable Floodlight Wide Flood/30°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW
<b>2113W/RCRCSW</b>	Orientabile Molto Largo/60° Adjustable Floodlight Super Wide/60°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing

Dimmerazione: Dimmerabile / Dimming: Dimmable

<b>AC2112</b>	Visiera in acciaio verniciato Painted steel visor	<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²
<b>AB2112</b>	Braccio per estensione a Parete/Soffitto L=500mm Extension Arm for Wall/Ceiling L=500mm	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>E.CAV.538.020</b>	Cavo/Cable H05BQ-F 5x1 2mt	<b>E.TRA.592</b>	Driver remoto ELG 240W 24Vdc IP67 L244xW71xH38
<b>E.CAV.538.050</b>	Cavo/Cable H05BQ-F 5x1 5mt	<b>E.TRA.579</b>	Driver ON/OFF - 100W 24Vdc IP67 L140xW63xH32
<b>E.CAV.538.100</b>	Cavo/Cable H05BQ-F 5x1 10mt	<b>E.CNT.001</b>	Tastiera RGBW 16DMX Ch. 100-240V RGBW Controller 16DMX Ch. 100-240V
<b>MOR685P/2V</b>	Connettore IP68 2Vie/5Poli 5x4mm² IP68 Connector 2-ways/5-Poles 5x4mm²	<b>E.CNT.002</b>	Tastiera RGBW 1024DMX Ch. USB/Ethernet 100-240V RGBW Controller 1024DMX Ch. USB/Ethernet 100-240V
<b>MOR685P/3V</b>	Connettore a Y, IP68 3Vie/5Poli 5x2.5mm² IP68 Y-Connector 3ways/5Poles 5x2.5mm²		



## Proiettore con Picchetto RGBW-Driver remoto 24Vdc / Projector with Spike RGBW-Remote driver 24Vdc

Codice Code	Fascio Beam	* Watt with Algorithm	Sorgente Source	Apparecchio Fixture	Alimentazione Input Supply	CCT	CL	IP	IK	CRI
<b>2113P/RCRCNB</b>	Orientabile Spot/10° Adjustable Floodlight Spot/10°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW
<b>2113P/RCRCMB</b>	Orientabile Medio/20° Adjustable Floodlight Flood/20°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW
<b>2113P/RCRCWB</b>	Orientabile Largo/30° Adjustable Floodlight Wide Flood/30°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW
<b>2113P/RCRCSW</b>	Orientabile Molto Largo/60° Adjustable Floodlight Super Wide/60°	12W	1650 lm	1420 lm	24Vdc	RGBW (W=6500K)	III	66	07	RGBW

Vetro extrachiaro temperato da 4 mm serigrafato / Tempered extra-clear glass 4mm with silk-screen printing


Dimmerazione: Dimmerabile / Dimming: Dimmable

<b>AC2112</b>	Visiera in acciaio verniciato Painted steel visor	<b>MOR685P/3VS</b>	Scatola di connessione IP68 3Vie/5Poli 5x4mm² IP68 Connection Box 3-ways/5-Poles 5x4mm²
<b>E.CAV.538.020</b>	Cavo/Cable H05BQ-F 5x1 2mt	<b>MOR685P/4VS</b>	Scatola di connessione IP68 4Vie/5Poli 5x4mm² IP68 Connection Box 4-ways/5-Poles 5x4mm²
<b>E.CAV.538.050</b>	Cavo/Cable H05BQ-F 5x1 5mt	<b>E.TRA.592</b>	Driver remoto ELG 240W 24Vdc IP67 L244xW71xH38
<b>E.CAV.538.100</b>	Cavo/Cable H05BQ-F 5x1 10mt	<b>E.TRA.579</b>	Driver ON/OFF - 100W 24Vdc IP67 L140xW63xH32
<b>MOR685P/2V</b>	Connettore IP68 2Vie/5Poli 5x4mm² IP68 Connector 2-ways/5-Poles 5x4mm²	<b>E.CNT.001</b>	Tastiera RGBW 16DMX Ch. 100-240V RGBW Controller 16DMX Ch. 100-240V
<b>MOR685P/3V</b>	Connettore a Y, IP68 3Vie/5Poli 5x2.5mm² IP68 Y-Connector 3ways/5Poles 5x2.5mm²	<b>E.CNT.002</b>	Tastiera RGBW 1024DMX Ch. USB/Ethernet 100-240V RGBW Controller 1024DMX Ch. USB/Ethernet 100-240V

\* Watt with Algorithm Un prodotto RGBW con sistema **AUGENTI ALGORITHM** da 12W, è comparabile a prodotti RGBW STANDARD da 36/40W  
An **AUGENTI** RGBW product with **ALGORITHM SYSTEM** from 12W is comparable to standard RGBW products from 36/40W

# KUBO12-S RGBW ACCESSORI Accessories

## FIXING ACCESSORIES



**AB2112**


Braccio per estensione a Parete/Soffitto L=500mm (altre misure a richiesta). Acciaio verniciato a polvere poliestere. Viteria e connettori IP68 inclusi  
Extension Arm for Wall/Ceiling L=500mm (other measures on request). Stainless Steel threaded with polyester powder. Screws and IP68 connectors included



**AC2112**

Visore anti-abbagliamento in Acciaio verniciato a polvere poliestere. Viteria inclusa  
Stainless Steel Anti-glare Convejar threaded with Polyester Powder. Screws Included

## CONNESSIONE - CONNECTION



**E.CAV.538.020**

Cavo/Cable H05BQ-F 5x1 - 2mt

**E.CAV.538.050**

Cavo/Cable H05BQ-F 5x1 - 5mt

**E.CAV.538.100**

Cavo/Cable H05BQ-F 5x1 - 10mt



**MOR685P/2V**

Connettore IP68 2Vie/5Poli. Sezione massima 5x4mm<sup>2</sup>  
IP68 Connector 2-ways/5-poles. Maximum section 5x4mm<sup>2</sup>



**MOR685P/3V**

Connettore a Y - IP68 3Vie/5Poli - 5x2.5mm<sup>2</sup>  
IP68 Y-Connector 3ways/5poles - 5x2.5mm<sup>2</sup>



**MOR685P/3VS**

Scatola di connessione IP68 3Vie/5Poli - 5x4mm<sup>2</sup>  
IP68 Connection Box 3-ways/5-poles - 5x4mm<sup>2</sup>



**MOR685P/4VS**

Scatola di connessione IP68 4Vie/5Poli - 5x4mm<sup>2</sup>  
IP68 Connection Box 4-ways/5-poles - 5x4mm<sup>2</sup>



**E.TRA.580**

Limitatore di sovratensione cablato di tipo 2+3 ultra compatto.  
Ultra compact Type 2+3 hard wired surge protector.  
CLI - IP67.  
L37xW30xH30

## ALIMENTATORI - DRIVER - ELECTRONICS 24Vdc in Tensione - Constant voltage 24Vdc



**E.TRA.579**

1 Driver for 1-4 Lamps

Driver 100W 24Vdc IP67 - ON/OFF  
L140xW63xH32



**E.TRA.592**

1 Hub for 5-9 Lamps

Driver ELG 240W 24Vdc IP67  
L244xW71xH38



## TOUCH CONTROLLER



**E.CNT.001**

Tastiera Touch controllo remoto RGBW  
16DMX Ch.100-240V  
RGBW Touch Panel controller  
16DMX Ch. 100-240V



**E.CNT.002**

Tastiera Touch controllo remoto RGBW  
1024DMX Ch. USB/Ethernet 100-240V  
RGBW Touch Panel controller  
1024DMX Ch. USB/Ethernet 100-240V

