






# Linear Lighting Beam Wall Washer

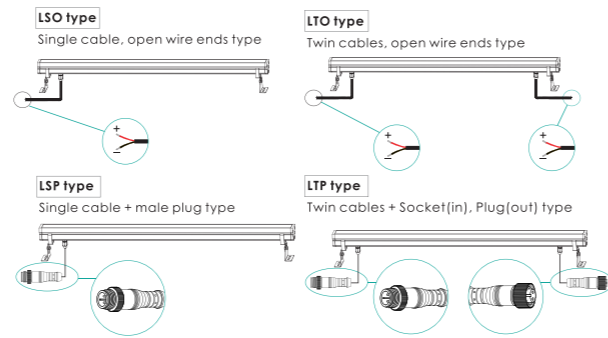


LED Colour Temperature	Optics
2000K 3000K 6000K	B13 L0110° D023LK 10°X35° 35°



### Adjustable Beam Direction

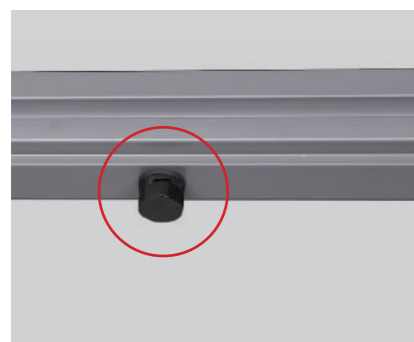


Air Valve

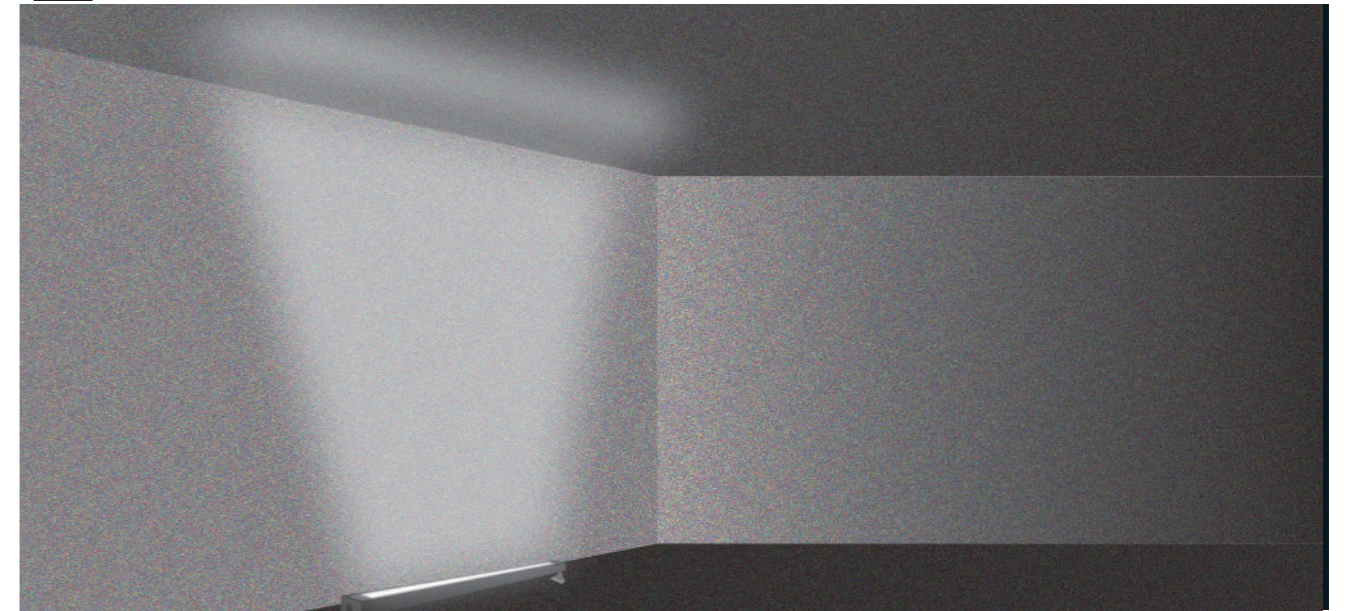

### Outer Dimensions

Unit:mm

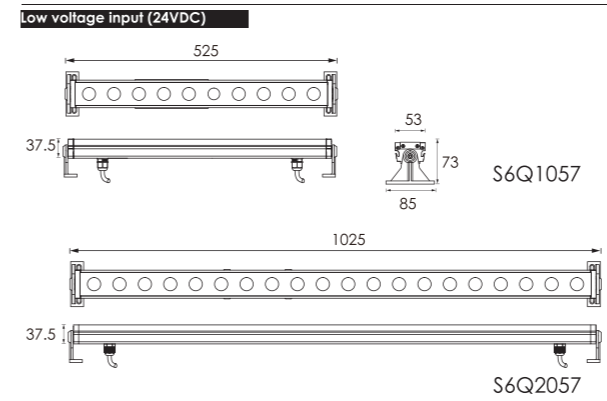


### Material Specifications

Housing	Extruded aluminum,poder coated
Lens	Optical lens, efficiency≥85%
Light Window	Tempered glass,T=3mm
Cable gland	IP68 PG-9 PA66
Gasket	Glass and housing are silicone sealed
LED	OSRAM or NICHIA
Operating temperature	-20°C~40°C
Bracket	12# Die-casting powder coated aluminum
Power Cable	2XH05RN-F 2X1.0mm² L=0.5m(Low Voltage) 2XH05RN-F 3X1.0mm² L=0.5m(High Voltage)
Dimmable Support	<b>Triac PWM 1-10V Dali</b>

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Length L=(mm)	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
<b>S6Q1057</b>	10X2W	B13	10°X35°	525	24V DC 120/240	24V = 1041 120V = 174 240V = 92	24V = 25 120V = 20.8 240V = 20.8	Cool white = 1840 Warm white = 1510	05
<b>S6Q2057</b>	20X2W	B13	10°X35°	1025	24V DC 120/240	24V = 2056 120V = 374 240V = 202	24V = 50 120V = 41 240V = 42	Cool white = 3580 Warm white = 2945	05

### S6Q1057

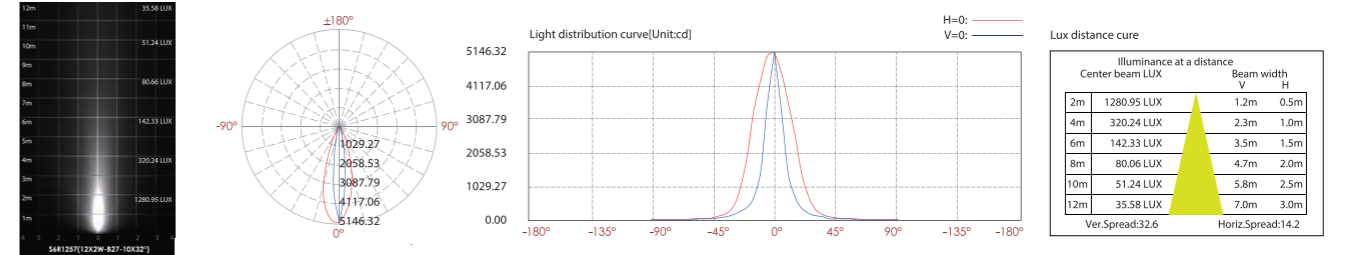

### S6Q2057

