



**Linear Wall Washer**









<b>ITEM</b>	A6LD0658
<b>LIGHT SOURCE</b>	6×4W Nichia
<b>LENS</b>	A24
<b>SELECTED DEGREE(°)Ø1/2</b>	15°(A24/15°)
<b>LENGTH(MM)</b>	500
<b>INPUT VOLTAGE(V)</b>	DC 24 120 240V
<b>OPERATING CURRENT(MA)</b>	DC 24=1250 120=222 240=114
<b>CONSUMPTION(W)</b>	DC 24=25 120=26 240=26.1
<b>LUMINANCE(LM)</b>	CW(240)=2236 WW=1990
<b>IK</b>	05

(low voltage)

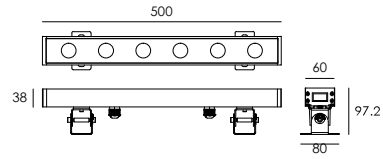


(high voltage)

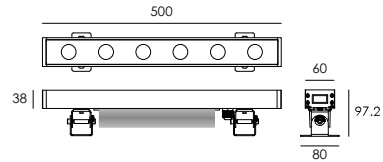


<b>ITEM</b>	A6LD1258
<b>LIGHT SOURCE</b>	12×4W Nichia
<b>LENS</b>	A24
<b>SELECTED DEGREE(°)Ø1/2</b>	15°(A24/15°)
<b>LENGTH(MM)</b>	1000
<b>INPUT VOLTAGE(V)</b>	DC 24 120 240
<b>OPERATING CURRENT(MA)</b>	DC 24=2500 120=425 240=214
<b>CONSUMPTION(W)</b>	DC 24=50 120=50 240=51
<b>LUMINANCE(LM)</b>	CW(240)=4417 WW=4108
<b>IK</b>	05

(low voltage)

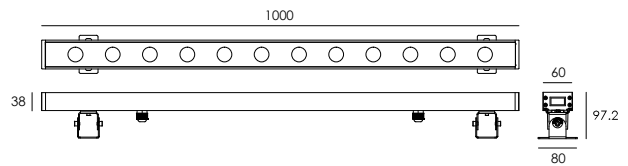


(high voltage)

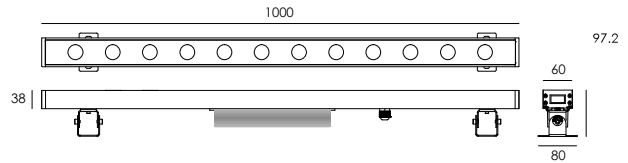

**WATER PROOF SOLUTION**


(low voltage)



**A Water-Stopper(Included)**  
A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.


**B IP67 Jiffy quick plug/socket connector(Optional)**  
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

(high voltage)



**C High voltage driver IP65**

**ANTI GLARE LOUVER (Optional)**

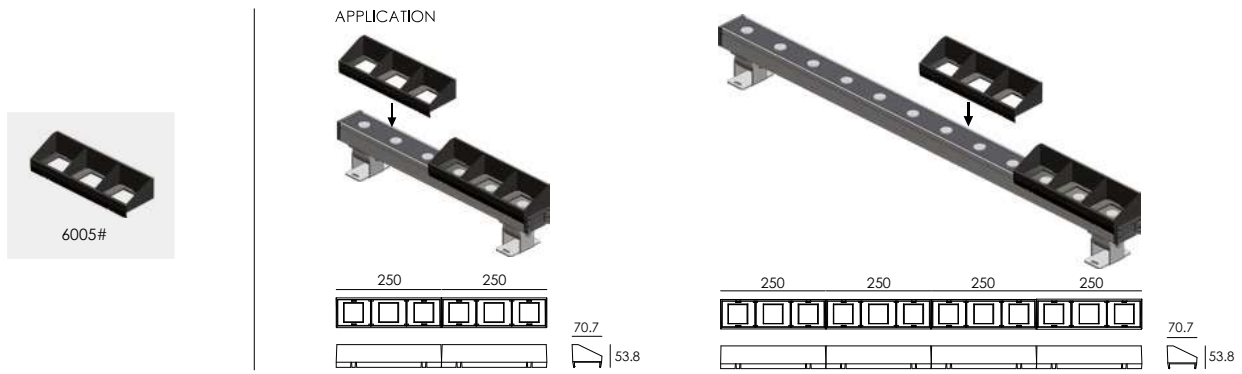


**HOUSING** Extruded aluminum  
**BRACKET** Aluminum anodized finishing  
**LIGHT WINDOW** Tempered glass.T=4mm  
**CABLE GLAND** IP-68 PG-13.5 PA66  
**GASKET** Glass and housing are silicone sealed  
**LENS** OPTICS lens, efficiency≥85%  
**LED** NICHIA SMD 3535  
**OPERATING TEMPERATURE** -20°C~40°C  
**POWER CABLE** Outside of Luminaire  
 H07RN-F 2×1.5mm², L=0.5m(12V/24V)  
 H05RN-F 3×1.0mm², L=0.5m(120V/240V)  
**DIMMING SUPPORT** Triac PWM Available  
 1-10V Dali Customized

**OPTICS** Referenced Degree(°)θ1/2

	<b>A24</b>	<b>15°</b>	<b>30°</b>	<b>15°×30°</b>	<b>15°×45°</b>
--	------------	------------	------------	----------------	----------------


**CONNECTION**

**LOW VOLTAGE INPUT (24VDC) POWER CORD MODEL**

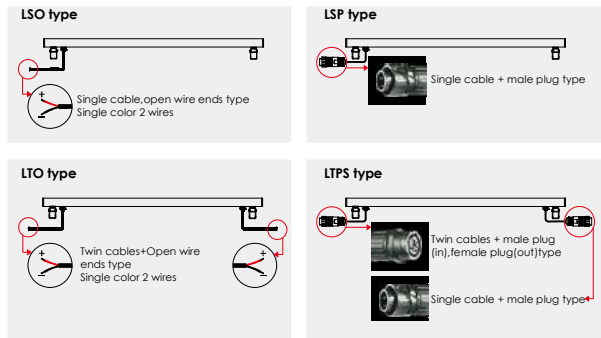

•Low voltage input default: Twin LTO type power cable, waterproof plugs are not included. (Other power cable type and plugs are optional)

**HIGH VOLTAGE INPUT (100V-240V) POWER CORD WIRING MODEL**

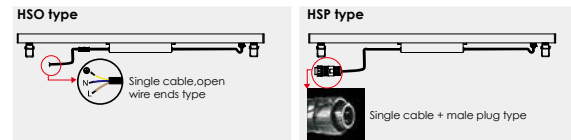

•High voltage input default: Single HSO type power cable, waterproof plugs are not included. (Other power cable type and plugs are optional)

**PHOTOMETRIC (Non anti glare louver)**

