



Linear Wall Washer







ITEM
B6JE0656

LIGHT SOURCE
6×1W

LENS
B38

SELECTED DEGREE(°)Ø1/2
30°(B38/30°)

LENGTH(MM)
250

INPUT VOLTAGE(V)
DC 24 120 240


OPERATING CURRENT(MA)
DC 24=3.5 120=50 240=30

CONSUMPTION(W)
DC 24=7.3 120=6 240=6.5


LUMINANCE(LM)
low voltage: CW=410 WW=350
high voltage: CW=540 WW=432

IK
02

(low voltage)



(high voltage)



ITEM
B6JE1256

LIGHT SOURCE
12×1W

LENS
B38

SELECTED DEGREE(°)Ø1/2
30°(B38/30°)

LENGTH(MM)
500

INPUT VOLTAGE(V)
DC 24 120 240


OPERATING CURRENT(MA)
DC 24=610 120=130 240=65

CONSUMPTION(W)
DC 24=14.5 120=15.0 240=15.0


LUMINANCE(LM)
low voltage: CW=820 WW=700
high voltage: CW=1080 WW=864

IK
02

(low voltage)



(high voltage)



ITEM
B6JE2456

LIGHT SOURCE
24×1W

LENS
B38

SELECTED DEGREE(°)Ø1/2
30°(B38/30°)

LENGTH(MM)
1000

INPUT VOLTAGE(V)
DC 24 120 240

OPERATING CURRENT(MA)
DC 24=1220 120=255 240=135

CONSUMPTION(W)
DC 24=29 120=30.8 240=31.5


LUMINANCE(LM)
low voltage: CW=1660 WW=1413
high voltage: CW=2140 WW=1976

IK
02

(low voltage)



(high voltage)




WATER PROOF SOLUTION

(low voltage)



- A IP67 Jiffy quick plug/socket connector**(Included)
A IP-67 connector is an assembly and ensures that water vapor will not enter into luminaires directly.

(high voltage)

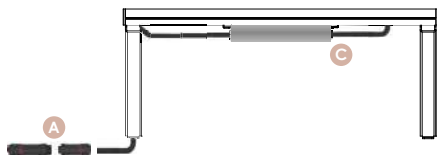

- B IP67 Jiffy quick plug/socket connector**(Option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.
- C High voltage driver** IP65


EXTERNAL BRACKET(Optional)



L=400 mm



ANTI GLARE LOUVER (Optional)

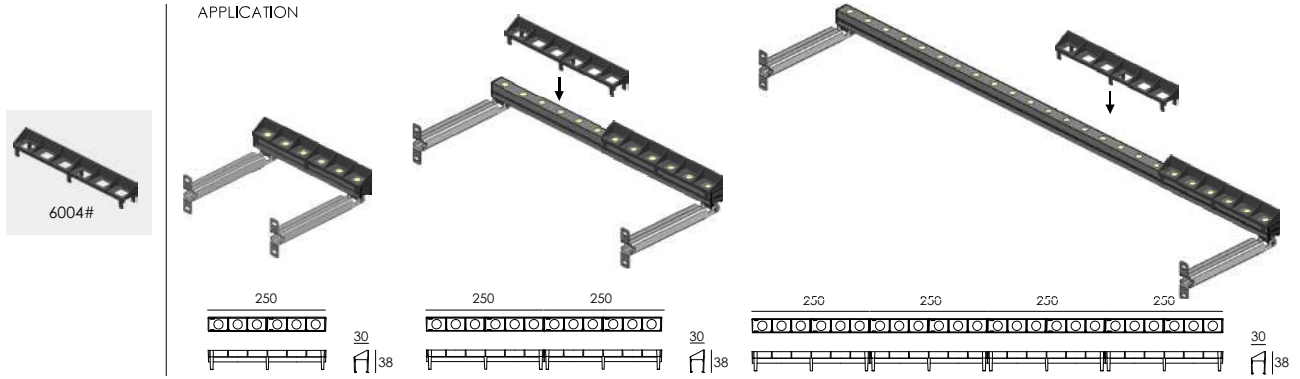


HOUSING Extruded aluminum anodized finishing
BRACKET Aluminum anodized finishing
LIGHT WINDOW Tempered glass, T=2mm
GASKET Glass and housing are silicone sealed
LENS OPTICS lens efficiency ≥85%
LED Single color ORSAM LED
OPERATING TEMPERATURE -20°C~40°C
POWER CABLE Outside of luminaire
 H03VV-F 2×0.75mm², L=1.1m(12V/24V)
 H05RN-F 3×1.0mm², L=1.1m(120V/240V)
DIMMING SUPPORT Triac PWM Available
 1-10V Dali Customized

OPTICS Referenced Degree(°)θ1/2

	B38	30°	40°	50°	60°	25°×50°
--	-----	-----	-----	-----	-----	---------

CONNECTION


LOW VOLTAGE INPUT (24VDC) POWER CABLE TYPE



Low voltage input default: LTPS type power cable with conducted input and output, waterproof socket connector are included.



HIGH VOLTAGE INPUT (100V-240V) POWER CALBE WIRING TYPE

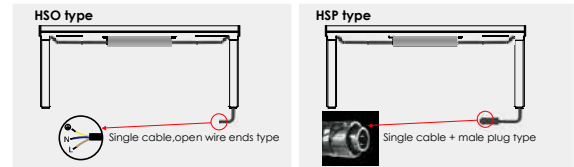

High voltage input default: HSO type power cable, waterproof socket connector are not included (optional).

PHOTOMETRIC (Non anti glare louver)

