

THIN



General data:

Luminaire body: aluminium
Mounting type: surface
Ingress protection IP: IP20
Operating temperature: from -40°C to +40°C
Lifetime : 100 000h

Electric data:

Nominal voltage: 220-240V AC
Nominal frequency: 50-60 Hz
Protection class: I
Contains light source: Yes
Dimming: on-off, DALI, CASAMBI

Optical data:

Optical system: lens
Material: PMMA
Light distribution: symmetrical
Lenses available: 18°, 36°, 60°

Lighting data:


Light source: LED
Colour rendering index: CRI>90 (on request: CRI>95)
Tolerance of luminous flux: +/-10%

other data:


weight: 0,8-1,0kg
box: 350x300x200mm



surface mounted
luminaire power 8W, 14W

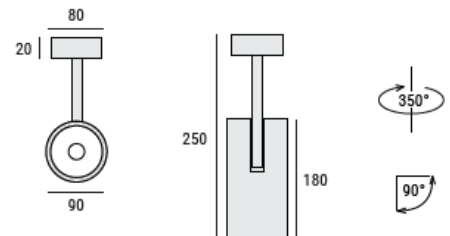

surface mounted
luminaire power 20W

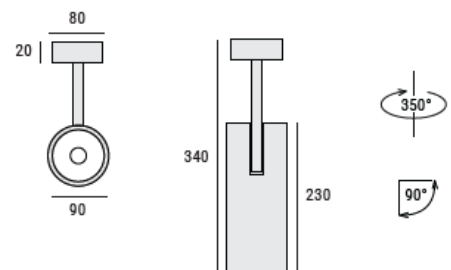

The THIN projector is a luminaire with a simple, modern design, made of aluminium. It can be mounted on a track or directly to the ceiling. Wide range of angles allows to adjust the light beam exactly to the element we want to illuminate - from narrow to wide angle. This projector can be used in exhibition spaces, shops, as well as in modern residential interiors.

E- electronic

O- on-off

D- Dali

C- Casambi



white
03

black
05

C- colour

L - lenses

18 - 18°

36 - 36°

60 - 60°

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	Weight
2022.02ELC	809lm	8W	110lm/W	2700K	0,8kg
2022.03ELC	843lm	8W	110lm/W	3000K	0,8kg
2022.04ELC	878lm	8W	110lm/W	4000K	0,8kg
2023.02ELC	1450lm	14W	112lm/W	2700K	0,8kg
2023.03ELC	1510lm	14W	112lm/W	3000K	0,8kg
2023.04ELC	1574lm	14W	112lm/W	4000K	0,8kg
2024.02ELC	2253lm	20W	122lm/W	2700K	1,0kg
2024.03ELC	2346lm	20W	122lm/W	3000K	1,0kg
2024.04ELC	2444lm	20W	122lm/W	4000K	1,0kg