

OLLIE 80 LINE




General data:

Luminaire body:	aluminum
Mounting type:	surface mounted/on an adjustable handle
Ingress protection IP:	65
Operating temperature range:	from -40° to +45°
Lifetime L80B10:	50 000h



Electrical data:

Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	8W, 14W, 21W
Protection class:	I
connection:	standard
Wiring:	wire 3x1mm ² (5x1mm ² for DALI)
Dimming:	ON-OFF, DALI, CASAMBI
Power supply:	inside the luminaire

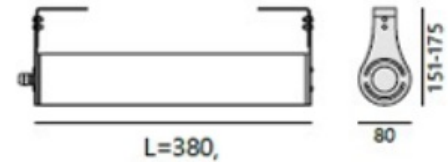

Optical data:

Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical

Lighting data:

Light source:	LED
Colour rendering index:	CRI>80
Colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

Other data:

On request:	DALI, CASAMBI
Application:	for illumination of facades

The Ollie ceiling luminaire is designed for illumination of facades with modern and classical architecture. Luminaire diffuser with a diameter of 80mm is made of PMMA. Thanks to the mounting brackets, it is possible to precisely position the luminaire in relation to the illuminated surface. Ollie family consists of luminaires with different power and dimensions while maintaining a uniform design.

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
94.12.03ELW	802lm	8W	100lm/W	3000K	≥80	2,0kg	450x200x150mm
94.12.04ELW	853lm	8W	100lm/W	4000K	≥80	2,0kg	450x200x150mm

Accessories

connector IP68 3-pole

catalogue code 124.00



suspension 1500mm (2 pcs.)

catalogue code 90.55



OLLIE 80 LINE



General data:

Luminaire body:	aluminum
Mounting type:	surface mounted/on an adjustable handle
Ingress protection IP:	65
Operating temperature range:	from -40° to +45°
Lifetime L80B10:	50 000h

Electrical data:

Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	8W, 14W, 21W
Protection class:	I
connection:	standard
Wiring:	wire 3x1mm ² (5x1mm ² for DALI)
connection wire:	0,5m
Dimming:	ON-OFF, DALI, CASAMBI
Power supply:	inside the luminaire

Optical data:


Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical

Lighting data:

Light source:	LED
Colour rendering index:	CRI>80
Colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

Other data:

On request:	DALI, CASAMBI
Application:	for illumination of facades

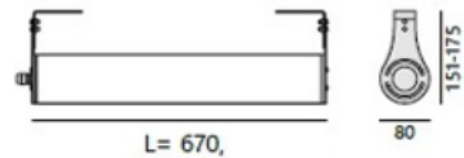

The Ollie ceiling luminaire is designed for illumination of facades with modern and classical architecture. Luminaire diffuser with a diameter of 80mm is made of PMMA. Thanks to the mounting brackets, it is possible to precisely position the luminaire in relation to the illuminated surface. Ollie family consists of luminaires with different power and dimensions while maintaining a uniform design.

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
9282.03ELW	1604lm	14 W	115lm/W	3000K	≥80	2,8kg	750x200x150mm
9282.04ELW	1706lm	14 W	115lm/W	4000K	≥80	2,8kg	750x200x150mm

Accessories

connector IP68 3-pole

catalogue code 124.00



suspension 1500mm (2 pcs.)

catalogue code 90.55



OLLIE 80 LINE



General data:

Luminaire body:	aluminum
Mounting type:	surface mounted/on an adjustable handle
Ingress protection IP:	65
Operating temperature range:	from -40° to +45°
Lifetime L80B10:	50 000h

Electrical data:

Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	8W, 14W, 21W
Protection class:	I
connection:	standard
Wiring:	wire 3x1mm ² (5x1mm ² for DALI)
connection wire:	0,5m
Dimming:	ON-OFF, DALI, CASAMBI
Power supply:	inside the luminaire

Optical data:


Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical

Lighting data:

Light source:	LED
Colour rendering index:	CRI>80
Colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

Other data:

On request:	DALI, CASAMBI
Application:	for illumination of facades

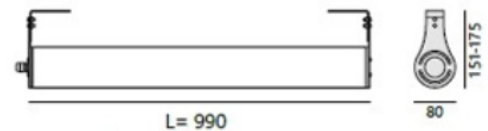

The Ollie ceiling luminaire is designed for illumination of facades with modern and classical architecture. Luminaire diffuser with a diameter of 80mm is made of PMMA. Thanks to the mounting brackets, it is possible to precisely position the luminaire in relation to the illuminated surface. Ollie family consists of luminaires with different power and dimensions while maintaining a uniform design.

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
9283.03ELW	24 06lm	21W	115lm/W	3000K	≥80	3,5kg	1100x200x150mm
9283.04ELW	2560lm	21W	115lm/W	4000K	≥80	3,5kg	1100x200x150mm

Accessories

connector IP68 3-pole

catalogue code 124.00



suspension 1500mm (2 pcs.)

catalogue number 90.55

