

JOGA 130 UGR<20



General data:

Mounting type: surface mounted

Ingress protection: IP20

Electrical data:

Nominal voltage: 220-240V

Nominal frequency: 50-60Hz

Protection class: II


Dimming: on-off, DALI, CASAMBI

Optical data:

Lenses available: 36°, 58°

Lighting data:


Colour rendering index: CRI>90

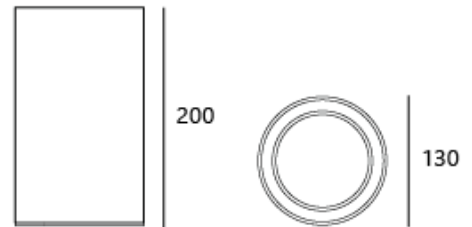

C1 - inside colour
C2 - outside colour

E- electronic
O- on-off
D- DALI
C- CASAMBI

L- beam angle
36 - 36°
58 - 58°

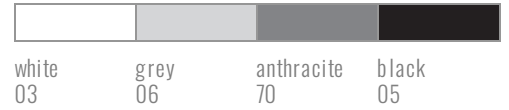

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	UGR
4 083.02ELC1.C2	1553lm	12W	14 lm/W	27 00K	<20
4 083.03ELC1.C2	1618lm	12W	14 lm/W	3000K	<20
4 083.04ELC1.C2	1686lm	12W	14 lm/W	4 000K	<20
4 084.02ELC1.C2	2159lm	18W	130lm/W	27 00K	<21
4 084.03ELC1.C2	2249lm	18W	130lm/W	3000K	<21
4 084.04ELC1.C2	2343lm	18W	130lm/W	4 000K	<21
4 085.02ELC1.C2	2917lm	27 W	117 lm/W	27 00K	<22
4 085.03ELC1.C2	3039lm	27 W	117 lm/W	3000K	<22
4 085.04ELC1.C2	3166lm	27 W	117 lm/W	4 000K	<22