

EUA-T0110

Product Feature

This product is mainly used for thyristor dimming power supply, with 0-10V analog signal control of the product
The output is 220V 50Hz or 110V 60Hz to drive the thyristor power supply to achieve easy dimming product wiring and simple control

Product Feature


- 0-10V analog signal control 220V 50Hz or 110V 60Hz tangential output
- Output single AC front cutting or back cutting, maximum output current 10A
- Standard 35mm guide housing for easy installation
- Can dimmer incandescent lamps, halogen lamps, LED thyristor dimming lamps or power supplies

Technical Parameters


Model	EUA-T0110	
Input	0-10V	Analog signal
	1-10V	Analog signal
	AC 220V 50Hz / 110V 60Hz	Alternating current voltage AC 220V 50Hz / 110V 60Hz
Output	AC 220V 50Hz / 110V 60Hz	10A front tangent or back tangent
	Channel	1
Dimming mode	Dip switch 1	Dip switch 1 does not turn green when the light is on. Dip switch 1 turns blue when the light is on, the light is dimmed when the light is on
	Dip switch 2	Dip switch 2 does not dial 1-10V dimmer, and DIP switch 2 turns 0-10V dimmer
Others	Working Temp.	-20 C ~50 C
	Storage Temp.; Humidity	-40 C ~85 C , 20-90%RH
	Net weight	220g
	Dimension	175*93.4*63.2mm(L*W*H), Standard 35mm rail mounting



Dimension(mm)

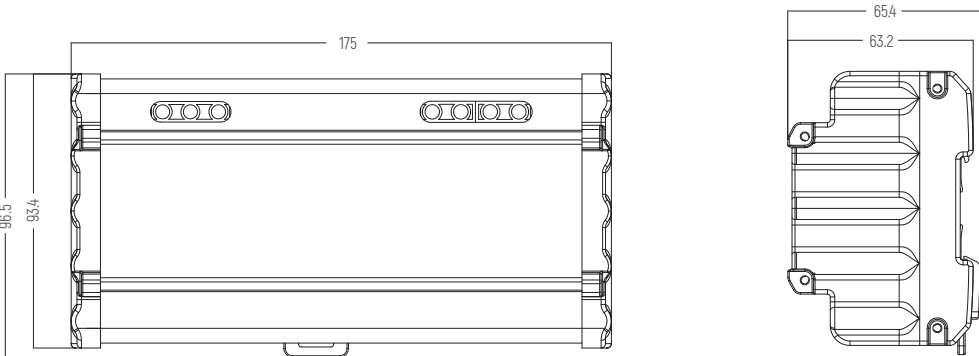

Wiring Diagram

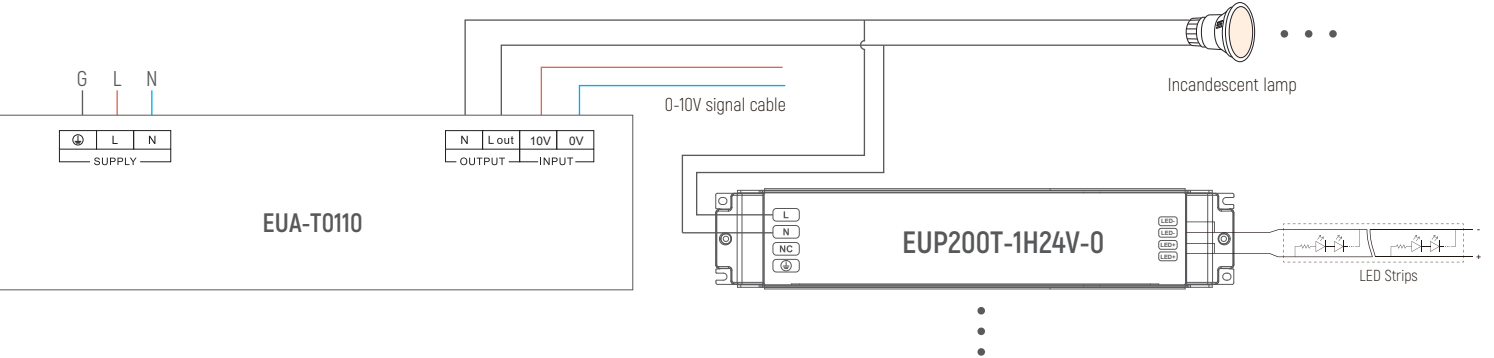

※The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions.

EUA-T0110

概述

此产品主要用于可控硅调光电源,用0-10V模拟信号控制该产品
输出220V 50Hz 或者110V 60Hz 来驱动可控硅电源实现调光 产品接线方便 控制简单

产品特点


- 0-10V模拟信号控制220V 50Hz 或者110V 60Hz 切向输出
- 输出单路 AC 前沿切相或者后沿切相 ，最大输出电流 10A
- 标准 35mm 导轨外壳，方便安装
- 可以对白炽灯，卤素灯，LED 可控硅调光灯具或电源进行调光




技术参数

型号	EUA-T0110	
输入	0-10V	模拟信号
	1-10V	模拟信号
	AC 220V 50Hz / 110V 60Hz	交流电压 AC 220V 50Hz / 110V 60Hz
输出	AC 220V 50Hz / 110V 60Hz	10A 前沿切相或者后沿切相
	通道数	1
调光方式	拨码开关1	拨码开关1不拔绿灯亮起 前切调光，拨码开关1拨下蓝灯亮起 后切调光
	拨码开关2	拨码开关2不拔1-10V调光，拨码开关2拨下0-10V调光
其它	工作温度	-20℃~50℃
	储存温度、湿度	-40℃~85℃, 20-90%RH
	净重	220g
	尺寸	175*93.4*63.2mm(长*宽*高), 标准 35mm导轨安装

产品尺寸

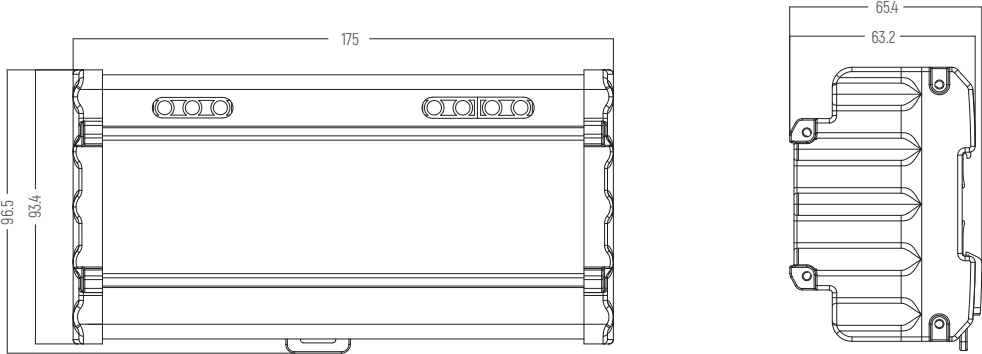

应用接线图

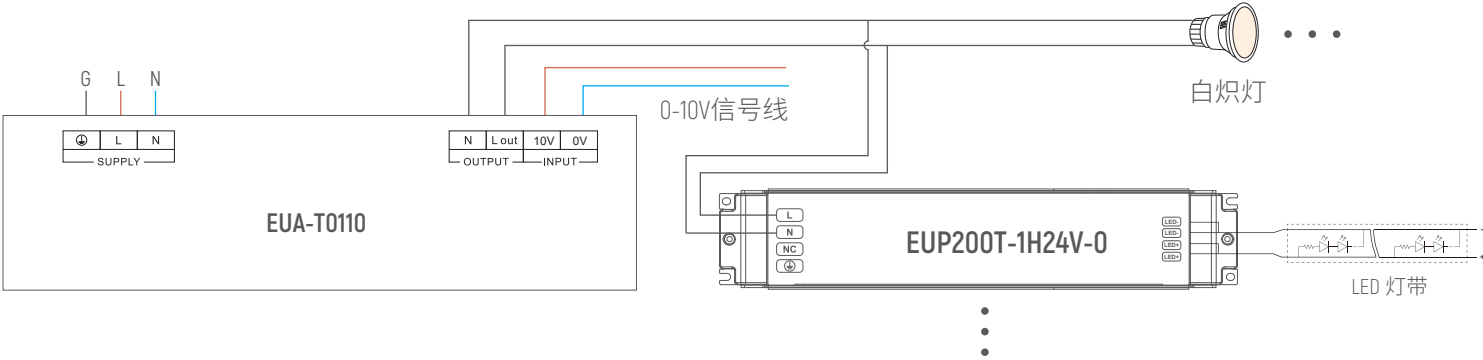

※本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。如有疑问请与我们联系。