


EUG-DALI

EU-BUS To DALI Gateway

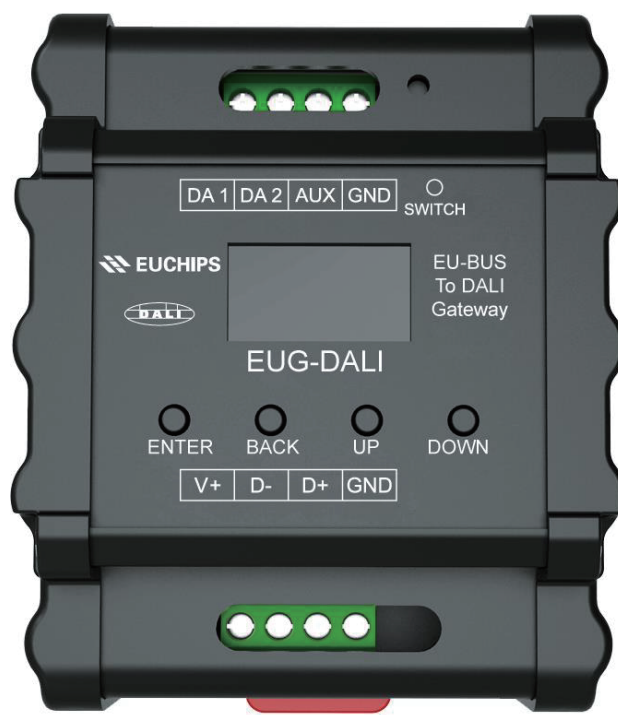

1. Summary

In the EU-BUS system, the user can control the equipment complying with DALI standard protocol via EUG-DALI gateway. The user can assign (including reassign, extent allocation) the address for DALI equipment, and ,can set group, scene, the switch-on brightness, the minimum brightness, the maximum brightness, fadetime. In addition, the user can know the state of DALI equipment via PC software or information set in advance.


2. Product Features

- Assign (including reassign, extent allocation) the address for DALI equipment
- In EU-BUS mode, can update firmware remotely via EU-BUS interface
- Support EU-BUS function to the DALI command
- Set parameter for DALI equipment, and, can be used with the DALI sensor, DALI panel
- Support EU-BUS to DALI command function
- Supplied via EU-BUS bus, without external power supply
- The standard 35mm din rail, convenient installation


3. Technical Parameters

Item	Parameters
Input voltage	Supplied via EU-BUS bus
Communication protocol	EU-BUS
The number of DALI equipment	64
The number of dry contact	1
Equipment size	76*93.4*63.2mm(L*W*H),standard 35mm din rail
G.W.	250g
Operational temperature	-20-50℃
Relative humidity	20-90%RH

4. Equipment size(mm)

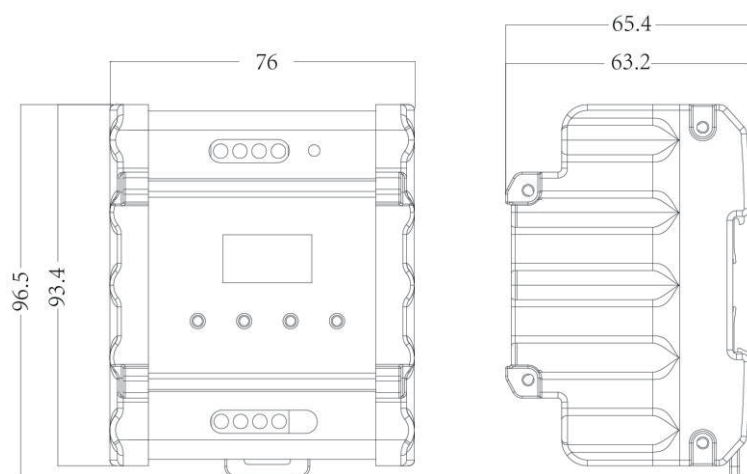


5. Wiring Diagram

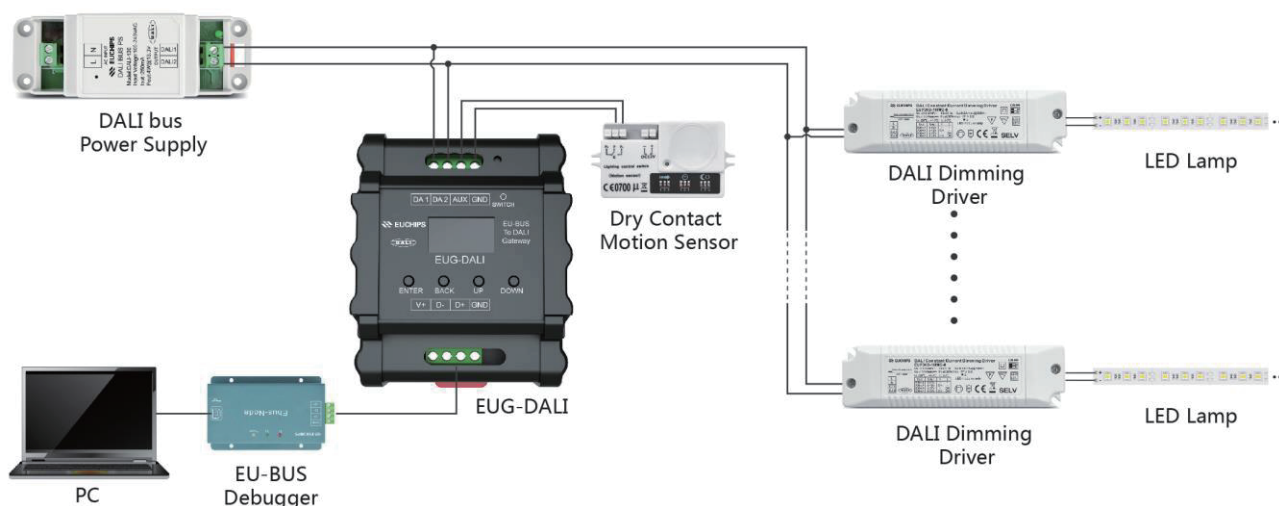

EUG-DALI

EU-BUS 转 DALI 网关

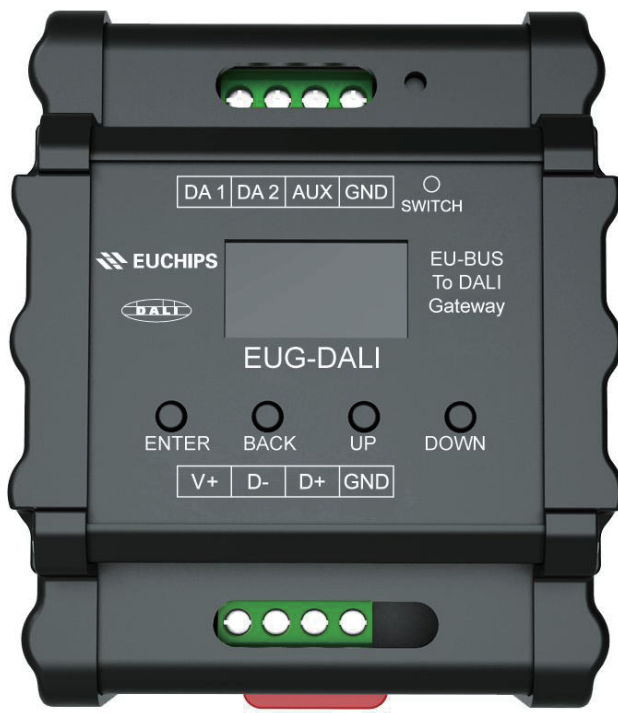

1. 概述

在 EU-BUS 系统中，可以通过 EUG-DALI 来实现对支持 DALI 协议的设备进行管理。支持 DALI 设备的自动地址分配（自动重新分配、扩展分配）、DALI 分组设置、场景设置、开机亮度设置、最小亮度设置、最大亮度设置、系统错误亮度设置、淡入淡出设置、设置的状态查询功能。网关可以实现对 DALI 设备的参数设置及 EU-BUS 控制命令到 DALI 控制命令的转换功能。


2. 产品特点

- 在 EU-BUS 模式下，可以通过 EU-BUS 接口远程更新固件
- 支持 DALI 设备地址重新分配、扩展分配功能
- 支持 DALI 设备参数设置功能、可以配合 DALI 传感器、DALI 面板使用
- 支持 EU-BUS 转 DALI 命令功能
- 总线供电，不需外加电源
- 标准 35mm 导轨外壳，方便安装

3. 技术参数

名称	参数
输入电压	通过 EU-BUS 总线供电
通讯协议	EU-BUS
支持 DALI 设备	64 个
支持辅助干接点输入	1 个
设备尺寸	76*93.4*63.2mm（长*宽*高）
毛重量	250g
工作温度	-20℃ ~+50℃
相对湿度	20-90%RH

4. 产品尺寸（mm）

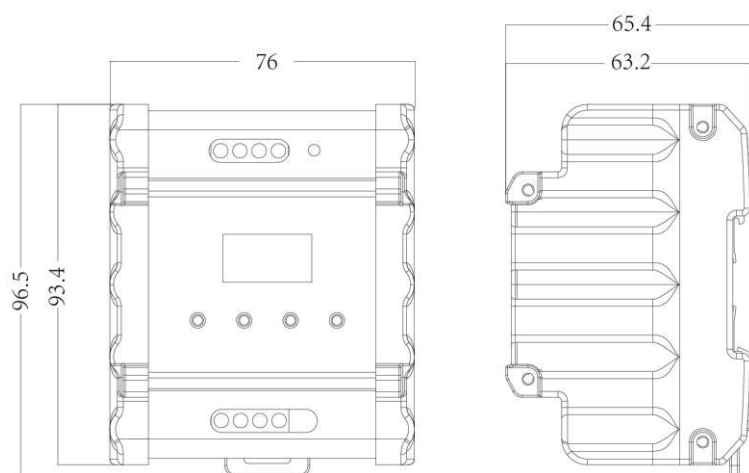

5. 应用连接图

