



Breda PRO
48V








Breda is a **48V curved magnetic track** system designed for creative and fluid lighting layouts. Its flexible structure allows for **sweeping curves and custom shapes**, bringing a dynamic architectural element to any space. Compatible with a wide range of **magnetic lighting modules**, Breda supports **spotlights** and **linear fixtures** with either **prismatic diffusers** for soft, uniform light or **COB optics** for focused, high-output illumination. Ideal for spaces that demand both **aesthetic impact and performance**, Breda offers a versatile and elegant lighting solution.

Breda

SURFACE MOUNTED ACCESSORIES USAGE



TRACKS & ACCESSORIES





	CODE	DESCRIPTION	DIMENSIONS (cm)
CURVE TRACKS LINEAR TRACKS	9010185 ●	1m Track (max 300w)	
	9010186 ●	2m Track (max 300w)	
CURVE TRACKS	9010192 ●	Curve R:45	
	9010193 ●	Curve R:60	
CIRCLE TRACKS	9010207 ●	Circle D 90 cm	
	9010208 ●	Circle D 120 cm	
	9010209 ●	Circle D 150 cm	
CONNECTORS	9010200 ●	+ Corner Mechanical-Electrical Connector	
	9010201 ●	T Mechanical-Electrical Connector	
	9010194 ●	Horizontal 90° Electrical / Mechanical Connector	
	9010195 ●	Vertical 90° Electrical / Mechanical Connector	
	9010202 ●	Linear Mechanical-Electrical Connector	
	9010203 ●	Power Connector	
	9010189 ●	End Cap	
SUSPENSION ACCESSORIES	9010211 ●	Mount for Suspension for 9010210	
	9010210 ●	Suspension Kit	
POWER FEED	9010213 ●	Driver box 150 Watt	
	9010318 ●	100 Watt, Non Flexible Input: 220-240Vac, Output: 48Vdc	
	9010319 ●	200 Watt, Non Flexible Input: 220-240Vac, Output: 48Vdc	
	9010212 ●	Driver with Box 144W 48Vdc	
Optional Accessories			
	9010130 ○	Dali Bus 100-240V, Iout 220mA	

Breda

RECESSED APPLICATION without gap



TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
CURVE TRACKS LINEAR TRACKS	9010183 ●	1m Track (max 300w) Cut-Out 3.6 cm	
	9010184 ●	2m Track (max 300w) Cut-Out 3.6 cm	
CURVE TRACKS	9010190 ●	Curve R:45	
	9010191 ●	Curve R:60	
CIRCLE TRACKS	9010204 ●	Circle D 90 cm Cut-Out: 3.6 cm	
	9010205 ●	Circle D 120 cm Cut-Out: 3.6 cm	
	9010206 ●	Circle D 150 cm Cut-Out: 3.6 cm	
CONNECTORS	9010198 ●	+ Corner Mechanical-Electrical Connector	
	9010199 ●	T Mechanical-Electrical Connector	
	9010196 ●	Horizontal 90° Electrical / Mechanical Connector	
	9010197 ●	Vertical 90° Electrical / Mechanical Connector	
	9010202 ●	Linear Mechanical-Electrical Connector	
	9010203 ●	Power Connector	
	9010189 ●	End Cap	
Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	9621500	75 Watt, 220-240VAC, 48VDC 1.6A	L 9.9 W 9.7 H 3
	9621501	100 Watt, 220-240VAC, 48VDC 2.3A	L 12.9 W 9.7 H 3
	9621502	150 Watt, 220-240VAC, 48VDC 3.3A	L 15.9 W 9.7 H 3
	9621503	200 Watt, 220-240VAC, 48VDC 4.4A0	L 21.5 W 11.5 H 3
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55

Breda Flexible

UPSIDE LIGHT LED



TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS	9010187	1m Track (max 300W)	
	9010188	2m Track (max 300W)	
	9010210	Suspension Kit	
	9010211	Mount for Suspension for 9010210	
POWER FEED	9010318	100W Input: 220-240Vac, Output: 48Vdc	
	9010319	200W Input: 220-240Vac, Output: 48Vdc	

Breda Flexible Compact Design

UPSIDE LIGHT LED


TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
	9010180	D 90cm Driver 100W 220-240V 30W, 3080Lm, 3000K, Indirect Light, Each Canopy 1xPower Supply	
	9010181	D 120cm Driver 100W 220-240V 40W, 3227Lm, 3000K, Indirect Light, Each Canopy 1xPower Supply	
	9010182	D 150cm Driver 100W 220-240V 50W, 4042Lm, 3000K, Indirect Light, Each Canopy 1xPower Supply	



CHEAT SHEET FOR CONNECTORS

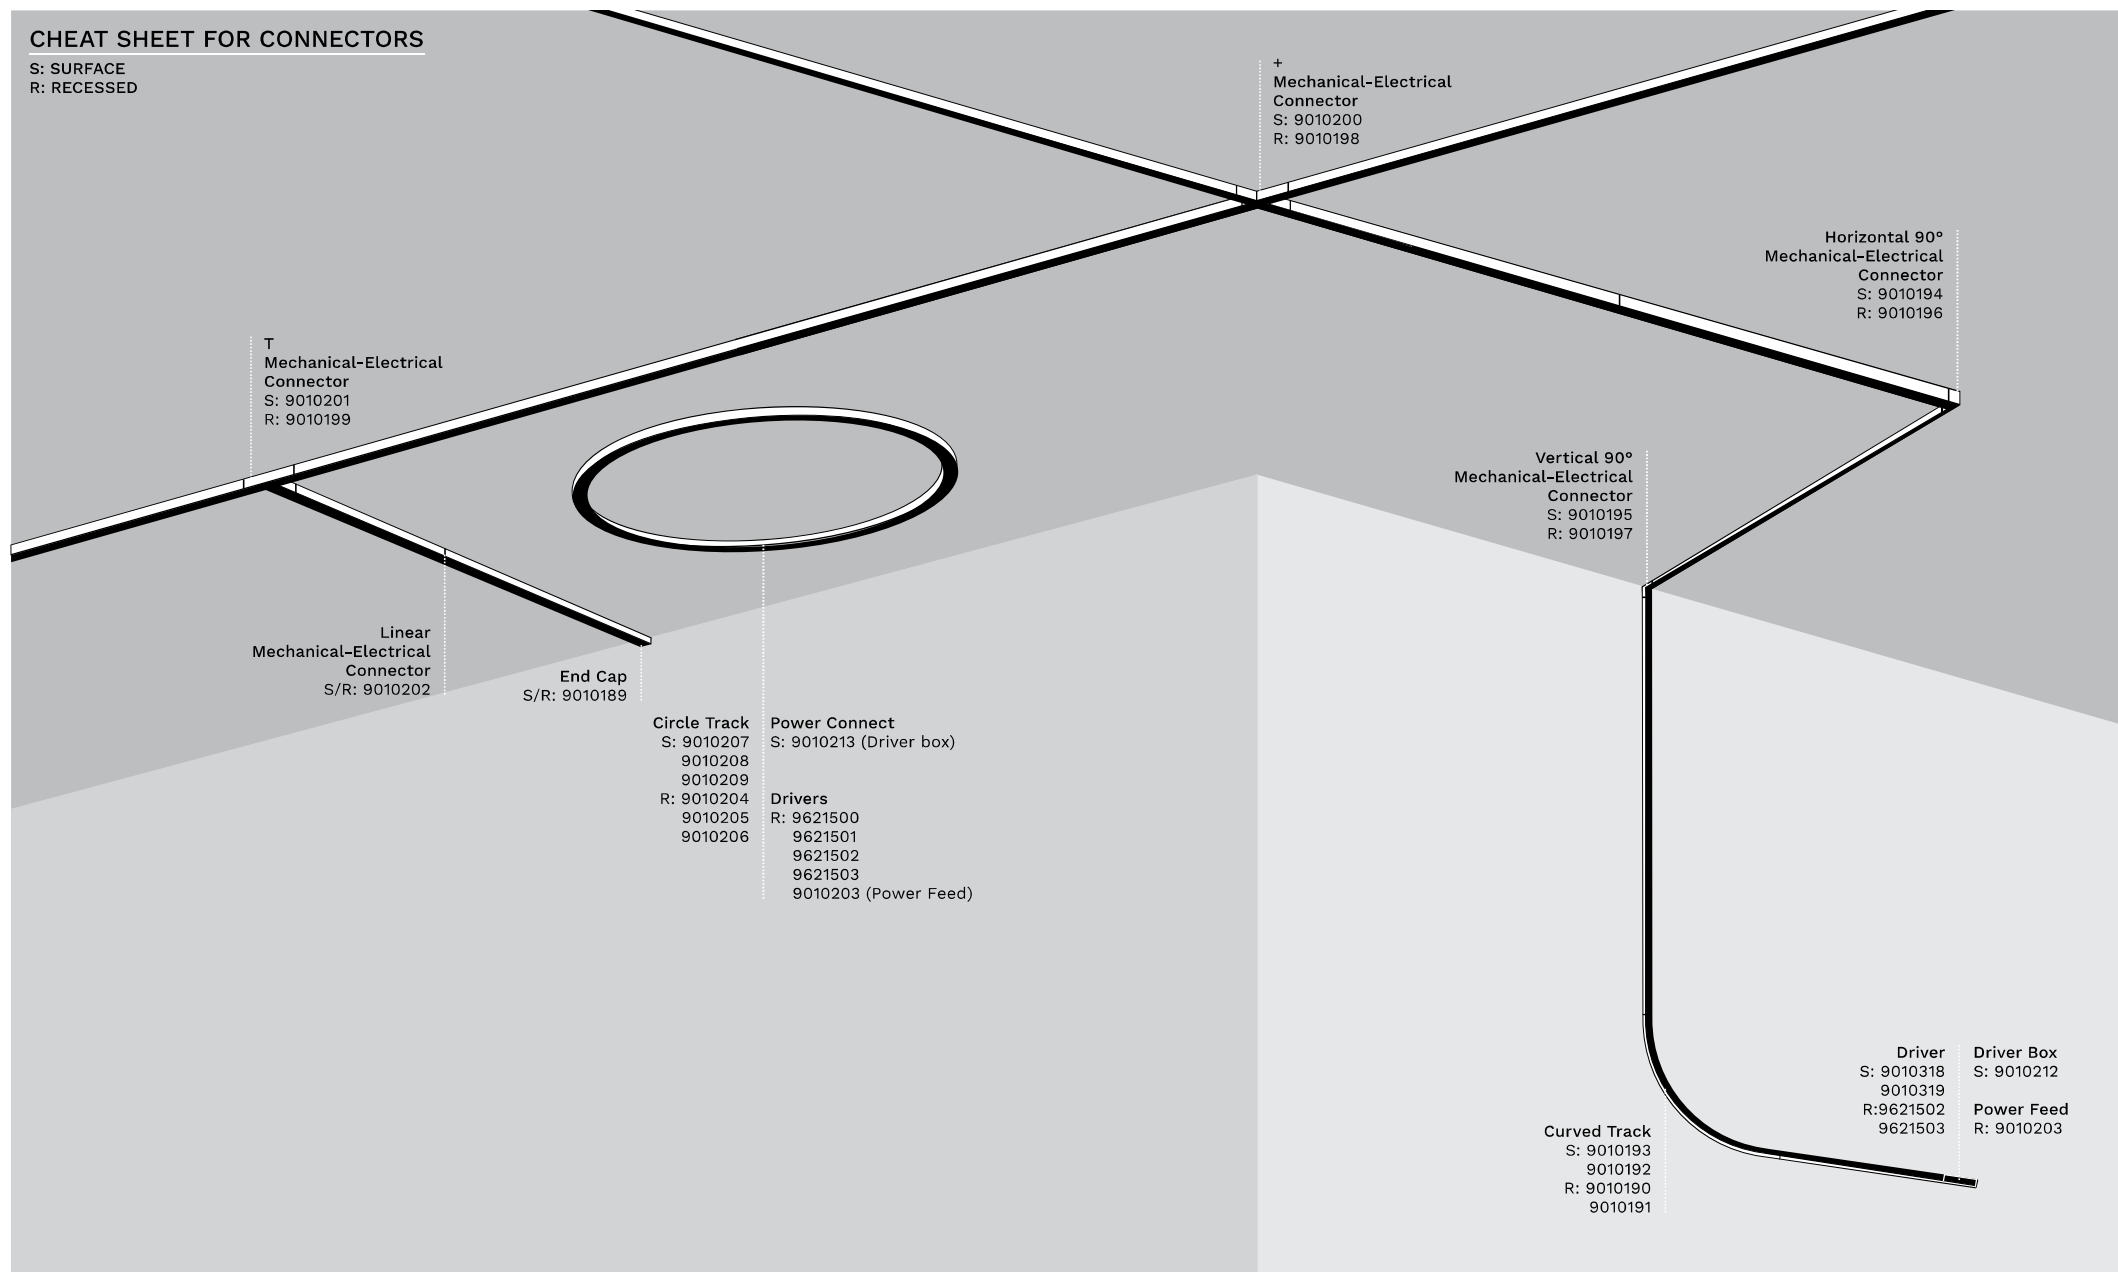S: SURFACE
R: RECESSED





Lighting Modules

Non-Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010238	● 6W	3000K	200Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010239	● 6W	4000K	200Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010249	● 6W	4000K	200Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010240	● 15W	3000K	566Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010250	● 15W	3000K	566Lm	L 50 W 2.2 H 5.1	48Vdc	Dali
9010241	● 15W	4000K	566Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off



• Non-Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010236	● 10W	3000K	543Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010248	● 10W	3000K	543Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010237	● 10W	4000K	543Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off



• Non-Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010247	● 15W	3000K	434Lm	L 24.5 W 2.2 H 14.5	48Vdc	On/Off
9010254	● 15W	3000K	434Lm	L 24.5 W 2.2 H 14.5	48Vdc	Dali




• Non-Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010246	● 15W	3000K	737Lm	L 24.5 W 2.2 H 14.5	48Vdc	On/Off
9010253	● 15W	3000K	737Lm	L 24.5 W 2.2 H 14.5	48Vdc	Dali



• Non-Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010242	● 6W	3000K	180Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010251	● 6W	3000K	180Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010243	● 6W	4000K	180Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010244	● 15W	3000K	500Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010252	● 15W	3000K	500Lm	L 50 W 2.2 H 5.1	48Vdc	Dali
9010245	● 15W	4000K	500Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off






Lighting Modules Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010168 ●	10W	3000K	600Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010160 ●	10W	3000K	600Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010169 ●	10W	4000K	600Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010170 ●	10W	3000K	423Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010161 ●	10W	3000K	423Lm	L 22.1 W 2.2 H 5.1	48Vdc	Dali
9010171 ●	10W	4000K	423Lm	L 22.1 W 2.2 H 5.1	48Vdc	On/Off
9010176 ●	10W	3000K	482Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010164 ●	10W	3000K	482Lm	L 50 W 2.2 H 5.1	48Vdc	Dali
9010178 ●	10W	4000K	482Lm	L 50 W 2.2 H 5.1	48Vdc	On/Off
9010177 ●	20W	3000K	1005Lm	L 100 W 2.2 H 5.5	48Vdc	On/Off
9010165 ○	20W	3000K	1005Lm	L 100 W 2.2 H 5.5	48Vdc	Dali
9010179 ●	20W	4000K	1005Lm	L 100 W 2.2 H 5.5	48Vdc	On/Off



• Flexible



• Flexible



- Adj. Beam Angle 15°-36°
- Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010172 ●	5W	3000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	On/Off
9010162 ●	5W	3000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	Dali
9010173 ●	5W	4000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	On/Off
9010100 ●	5W	3000K	283Lm	L 4.5 W 22.1 H 13.2	48Vdc	On/Off
9010174 ●	10W	3000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off
9010163 ●	10W	3000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	Dali
9010175 ●	10W	4000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off
9010101 ●	10W	3000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off
9010102 ●	10W	4000K	620Lm	L 5.5 W 22.1 H 13.2	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010107 ●	10W	3000K	650Lm	D 5.5 H 5.5	48Vdc	On/Off
9010108 ●	15W	3000K	990Lm	D 6.5 H 7	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136199 ●	5W	3000K	175Lm	L 10.4 W 2.2 H1 15.4 H2 34	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136198 ●	6W	3000K	277Lm	L 10.4 W 2.2 H 31.5	48Vdc	On/Off





Lighting
Modules
Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136201	24W	3000K	1165Lm	L 106 W 2.2 H ₁ 5.4 H ₂ 116	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136195	5W	3000K	200Lm	D 5 H 100	48Vdc	On/Off



• Flexible




CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136196	5W	3000K	230Lm	D 4.5 H 60	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136197	5W	3000K	138Lm	D 1.5 H 150	48Vdc	On/Off



• Flexible



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136200	24W	3000K	1800Lm	L 106 W 2.2 H ₁ 5.4 H ₂ 116	48Vdc	On/Off



• Flexible

