



Buxton PRO
24V ON/OFF
48V TRIAC

Buxton is our **original magnetic track system**, trusted for its **reliability and flexibility** over time. Available in **48V Triac dimmable** and **24V On/Off** versions, it offers a robust foundation for a wide range of lighting applications. With a **variety of corners and curved sections**, Buxton allows for creative layouts and seamless transitions. It supports a **large selection of linear lights and spotlights**, making it a versatile solution for both residential and commercial spaces seeking a proven, adaptable magnetic track system.

Buxton

SURFACE MOUNTED ACCESSORIES USAGE




TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS	8252001	1m Track (max 300W)	100
	9112690	Curve Track 90° R 120	4.1 3.8 7.5 90° R:120
	9112672	Curve Track 72° R 115	4.1 3.8 7.5 72° R:115
CONNECTORS	9912620	Electrical Connector for 9112690 & 9112672	11 2.5 1.7
	8252015	Mechanical-Electrical Connector for 8252001	2.1 10 2.1
	9252015	Power Connector for All	2.5 1.1 1.6
	9912600	Track Connector For Curved Track (9112690 & 9112672)	3.8 8 2.2
	9070126	T Connector for 8252001	7.5 54.1 2.3
	9070127	X Connector for 8252001	54.1 7.5 2.3
	8252011	Q Connector for 8252001	30 7.5 3.9
	8252014	V Connector for 8252001	15 7.5 3.9
	8252035	Corner 2V Connector 120°	120 14.5 3.9
	9912611	Connector Tube for 8252001	37.3 2.3 2.3
OTHER ACCESSORIES	9912601	Tube With Power Connector for 8252001	11 2.3 2.3
	9912612	Connector Tube for 8252001	70 2.3 2.3
	9912602	Tube With Power Connector for 8252001	11 2.3 2.3
	8252003	End Cap for 8252001	0.2 3.8 1.5
	9912603	End Cap For Curved Track (9112690 & 9112672)	0.3 7.5 4.1 0.5
DRIVERS	9012677	Cutable PVC Cover 1m	100
	8252016	Screws For Ceiling	
	8252017	Set Of Accessories	
	9010316	Track Driver 100 Watt	25 4 2.2
	9010317	Track Driver 200 Watt	30.5 4 2.2
	8252037	Fedder Power Included Driver 120 Watt	40 4 2.2
	8252038	Driver Box	40 4 2.2



Surface or Pendant Magnetic Track
8252034



Step 1
6PCS TRACK



8252034

Step 2
KIT OR SCREW



8252017 8252016


Step 3
DRIVER



Step 4
READY!




Circular Magnetic Profiles



8925201

D: 90
Driver 75W
220-240Vac
Included



8925202

D: 120
Driver 75W
220-240Vac
Included

Rectangular Magnetic Profile



8925204



8925204


Driver 100W
220-240Vac Included

Buxton
RECESS APPLICATION



TRACKS & ACCESSORIES

		CODE	DESCRIPTION	DIMENSIONS (cm)
CURVE TRACKS LINEAR TRACKS		8252002 ●	1m Track (max 300W) Cut-Out 4.25 cm	
		9212690 ●	Curve Track 90° R 120	
		9212672 ●	Curve Track 72° R 115	
CONNECTORS		9912620 ●	Electrical Connector for 9112690 & 9112672	
		9912605 ●	Mechanical Connector	
		9252015 ●	Power Connector	
		8252013 ●	Q Connector	
		8252012 ●	V Connector	
		8252003 ●	End Cap for 8252002	
OTHER ACCESSORIES		9912610 ●	End Cap For Curved Track (9212690 & 9212672)	
		9012677 ●	Cutable PVC Cover 1m	
		8252016 ●	Screws For Ceiling	

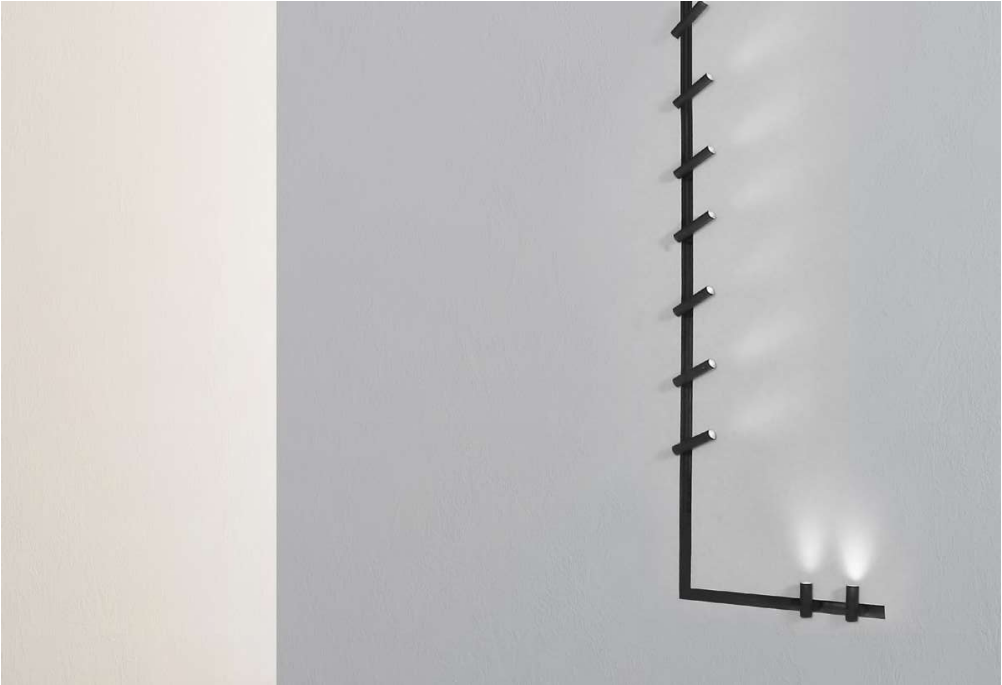

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	8252019	60 Watt, 220-240VAC, 24VDC 2.5A,	
	8252020	120 Watt, 220-240VAC, 24VDC	
	8252021	180 Watt, 220-240VAC, 24VDC	
IP67	9621508	75 Watt, 100-240VAC, 24VDC 1A	L 14 W 6.3 H 3.2
	9621509	100 Watt, 100-240VAC, 24VDC 1.1A	L 14 W 6.3 H 3.2
	9621510	150 Watt, 100-240VAC, 24VDC 2A	L 18 W 6.3 H 3.55
	9621511	200 Watt, 100-240VAC, 24VDC 2.4A	L 19.9 W 6.3 H 3.55

Remote Drivers for Triac Application			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 19.9 W 6.3 H 3.55

Controllers		
	CODE	DESCRIPTION
	9136151	Triac Controller 288W

Buxton L

SURFACE MOUNTED ACCESSORIES USAGE



TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS	9252001	1m Track (max 300W)	100 6.1
	9252002	2m Track (max 300W)	200 6.1
CONNECTORS	9236106	Electrical Connector	12 2
	9252003	Q Connector	29 6.1
	9252004	V Connector	10 6.1
	9252010	Mechanical Connector	11 11.4
	9252012	End Cap	4 0.2
OTHER ACCESSORIES	8252040	Set Of Accessories	
DRIVERS	9010316	On/Off 100 Watt Track Driver	25 2.2
	9010317	On/Off 200 Watt Track Driver	30.5 2.2

Buxton L

RECESS APPLICATION



TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS	9252005	1m Track (max 300W) Cut-Out 4.15 cm	100 6.1
	9252006	2m Track (max 300W) Cut-Out 4.15 cm	200 6.1
CONNECTORS	9236106	Electrical Connector	12 2
	9252011	Power Connector	11 1.6
	9252007	Q Connector	29 6.1
	9252008	V Connector	10 6.1
	9252010	Mechanical Connector	11 11.4
	9252012	End Cap	4 0.2

Remote Drivers

CODE	DESCRIPTION
8252019	60 Watt, 220-240VAC, 24VDC 2.5A,
8252020	120 Watt, 220-240VAC, 24VDC
8252021	180 Watt, 220-240VAC, 24VDC

Remote Drivers for Triac Application


	CODE	DESCRIPTION	DIMENSIONS (cm)
IP67	9621504	75 Watt, 100-240VAC, 48VDC 1A	L 18 W 6.3 H 3.55
	9621505	100 Watt, 100-240VAC, 48VDC 1.1A	L 18 W 6.3 H 3.55
	9621506	150 Watt, 100-240VAC, 48VDC 2A	L 21.9 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 2.4A	L 24.4 W 7.1 H 3.75

Controllers

CODE	DESCRIPTION	DIMENSIONS (cm)
9136151	Triac Controller 288W	L 16 W 4.7 H 2.2


CHEAT SHEET FOR CONNECTORS

S: SURFACE
R: RECESSED

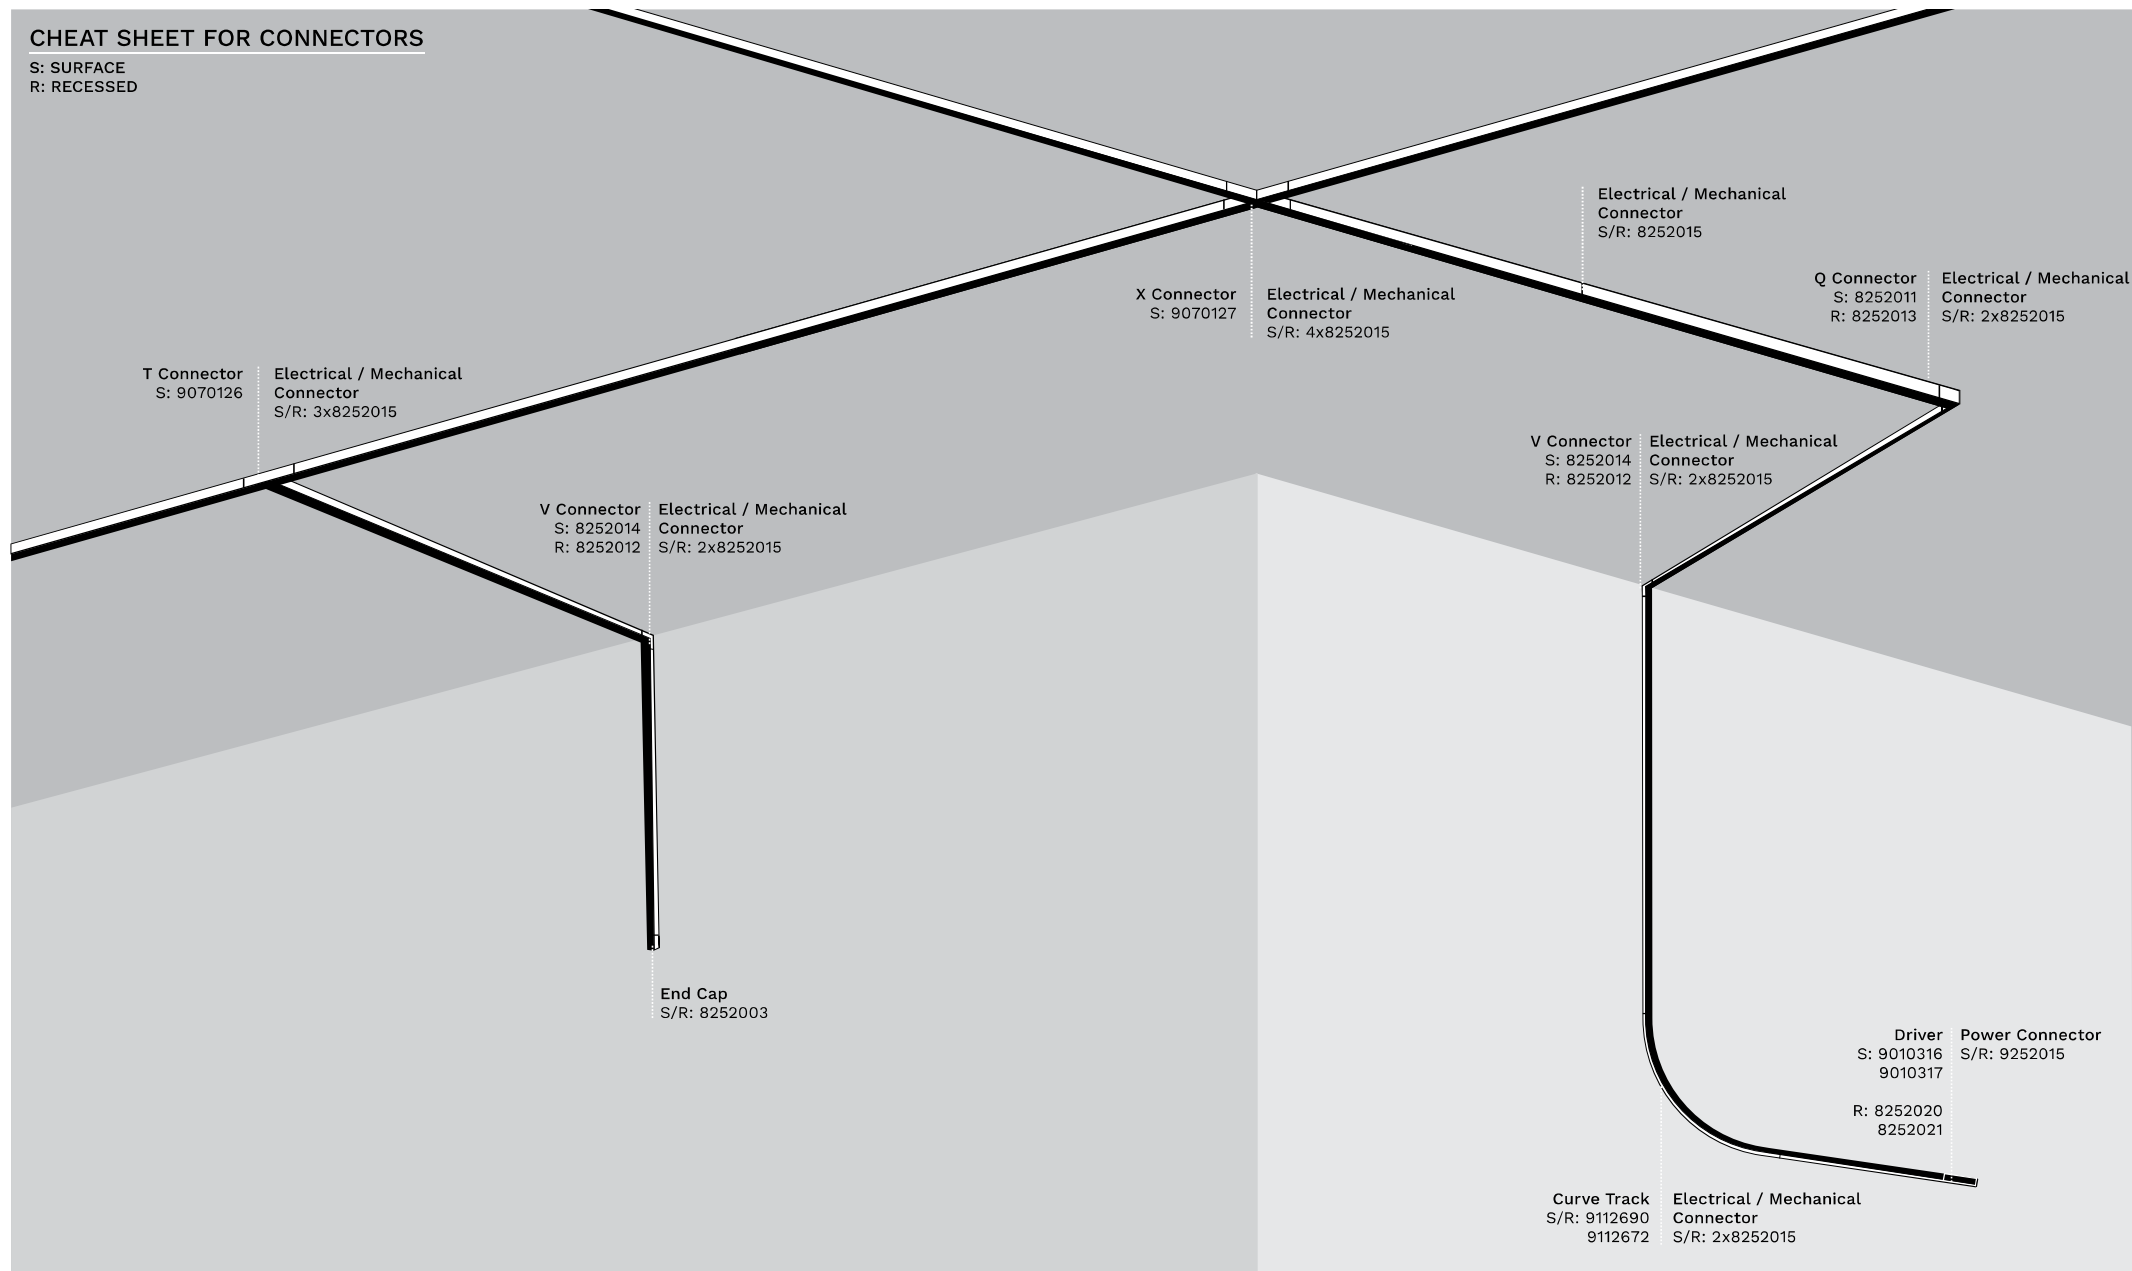



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8254418 ●	15W	3000K	440Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
9136158 ●	15W	3000K	600Lm	L 27.4 W 3.4 H 11.6	48Vdc	Triac
8254414 ●	15W	4000K	479Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
8254419 ●	22W	3000K	659Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off
9136159 ●	22W	3000K	800Lm	L 40.7 W 3.4 H 11.6	48Vdc	Triac
8254415 ●	22W	4000K	727Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8254416 ●	15W	3000K	371Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
9136156 ●	15W	3000K	520Lm	L 26.9 W 3.5 H 5.1	48Vdc	Triac
8254412 ●	15W	4000K	448Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
8254417 ●	22W	3000K	557Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off
9136157 ●	22W	3000K	800Lm	L 40.2 W 3.4 H 5.1	48Vdc	Triac
8254413 ●	22W	4000K	727Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off
9060960 ●	28W	3000K	1179Lm	L 80 W 3.5 H 5	24Vdc	On/Off
9136167 ●	28W	3000K	1179Lm	L 80 W 3.5 H 5	48Vdc	Triac
9060970 ●	28W	4000K	1179Lm	L 80 W 3.5 H 5	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252025 ●	15W	3000K	900Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
9136152 ●	15W	3000K	1200Lm	L 26.9 W 3.5 H 5.1	48Vdc	Triac
8252004 ●	15W	4000K	1080Lm	L 26.9 W 3.5 H 5.1	24Vdc	On/Off
8252026 ●	22W	3000K	1480Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off
9136153 ●	22W	3000K	1650Lm	L 40.2 W 3.5 H 5.1	48Vdc	Triac
8252005 ●	22W	4000K	1520Lm	L 40.2 W 3.5 H 5.1	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252027 ●	15W	3000K	1220Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
9136154 ●	15W	3000K	1340Lm	L 27.4 W 3.4 H 11.6	48Vdc	Triac
8252006 ●	15W	4000K	1320Lm	L 27.4 W 3.4 H 11.6	24Vdc	On/Off
8252028 ●	22W	3000K	1606Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off
9136155 ●	22W	3000K	1780Lm	L 40.7 W 3.4 H 11.6	48Vdc	Triac
8252007 ●	22W	4000K	1630Lm	L 40.7 W 3.4 H 11.6	24Vdc	On/Off



LOW VOLTAGE TRACKS - BUXTON

						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9060950 ●	5W	3000K	387Lm	D 3 H 10.6	24Vdc	On/Off



						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070129 ●	3W	3000K	35Lm	L 3.6 W 3.6 H 5.1	24Vdc	On/Off



						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136160 ●	10W	3000K	535Lm	D 3 L 24.5 H 15.1	48Vdc	Triac
9136161 ●	10W	3000K	535Lm	D 3.2 L 24.5 H 19.6	48Vdc	Triac




						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9013620 ●	20W	3000K	1585Lm	D 6.5 H 21	24Vdc	On/Off
9136164 ●	20W	3000K	1650Lm	D 6.5 H 21	48Vdc	Triac
9013720 ●	20W	4000K	1617Lm	D 6.5 H 21	24Vdc	On/Off

• Adj. Beam Angle
15°-35°



LOW VOLTAGE TRACKS - BUXTON


						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9060980 ●	10W	3000K	538Lm	D 3.2 L 24.5 H 15.1	24Vdc	On/Off
9136168 ●	10W	3000K	576Lm	D 3.2 L 24.5 H 15.1	48Vdc	Triac
9060990 ●	10W	4000K	542Lm	D 3.2 L 24.5 H 15.1	24Vdc	On/Off




						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252039 ●	5W	3000K	330Lm	D 3 H 16	24Vdc	On/Off
8252008 ●	5W	4000K	370Lm	D 3 H 16	24Vdc	On/Off
8925216 ●	8W	3000K	580Lm	D 3 H 19	24Vdc	On/Off
8925220 ●	10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
9012673 ●	10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
8252029 ●	12W	3000K	816Lm	D 3 H 19	24Vdc	On/Off
8252009 ●	12W	4000K	855Lm	D 3 H 19	24Vdc	On/Off

*Compatible with 8925201, 8925202, 8925204, 9112690, 9212690, 9212672, 9112672

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252039 ●	5W	3000K	330Lm	D 3 H 16	24Vdc	On/Off
8252008 ●	5W	4000K	370Lm	D 3 H 16	24Vdc	On/Off
8925216 ●	8W	3000K	580Lm	D 3 H 19	24Vdc	On/Off
8925220 ●	10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
9012673 ●	10W	3000K	680Lm	D 3 H 19	24Vdc	On/Off
8252029 ●	12W	3000K	816Lm	D 3 H 19	24Vdc	On/Off
8252009 ●	12W	4000K	855Lm	D 3 H 19	24Vdc	On/Off



						
						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136165 ●	10W	3000K	535Lm	D 3 H 42	48Vdc	Triac
8252032 ●	10W	3000K	680Lm	D 3 H 62	24Vdc	On/Off
9136166 ●	10W	3000K	535Lm	D 3 H 62	48Vdc	Triac





						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070130 ●	3W	3000K	32Lm	L 3.6 W 5.7 H 10.5	24Vdc	On/Off
  						



*Compatible with 8925201, 8925202, 8925204, 9112690, 9212690, 9212672, 9112672

CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9012674* ●	5W	3000K	220Lm	D 12 H 16.5	24Vdc	On/Off
9012671* ●	5W	3000K	220Lm	D 10 H 15	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
8252030 ●	12W	3000K	930Lm	D 3 H 150	24Vdc	On/Off
9136162 ●	12W	3000K	1185Lm	D 3 H 150	48Vdc	Triac
8252010 ●	12W	4000K	950Lm	D 3 H 150	24Vdc	On/Off
9136163 ●	12W	3000K	1185Lm	D 3 H 150	48Vdc	Triac



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9025201 ●	15W	3000K	730Lm	D 3 H 150	24Vdc	On/Off