
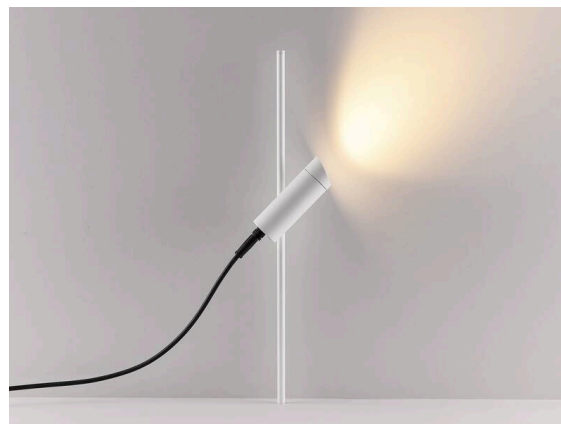



CHOPA

333-s00077

CHOPA II SET ERDSPIEBLEUCHTE made of aluminium, white, similar to RAL 9003, lens beam 40°, light output direct, UGR <22, swiveling 360°, tilting 360°, with converter, without motion detector, IP65

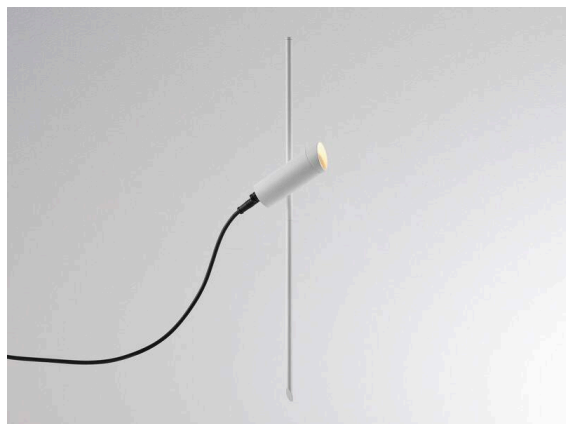

SKETCH

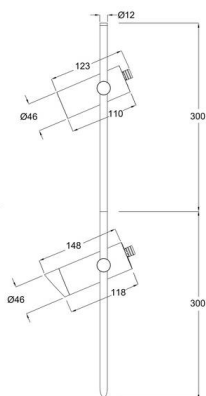

TECHNICAL DETAILS

Light source	LED
System performance [W]	6
Luminous flux [lm]	350/375
Colour temperature	2700/3000K
CRI	>90
UGR	<22
Optics	lens
Converter	with converter
Light emission area	direct
Beam angle	40°
Motion detector	without motion detector
Length [mm]	110
Height [mm]	600
Diameter [mm]	46
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK06
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	50 000
Ambient temperature	from -20° to +50°
Net weight [kg]	0.79
EAN number	9010870980402



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.