

FYNN

333-s00106


FYNN-C F BOLLARD made of aluminium, anthrazite, similar to RAL 7016, light output direct, with converter, dimmability: on/off, IP65



TECHNICAL DETAILS


Light source	LED
System performance [W]	10,5
Luminous flux [lm]	660/715
Colour temperature	2700/3000K
CRI	>90
Converter	with converter
Dimmability	on/off
Light emission area	direct
Voltage	220-240V 50/60Hz
Length [mm]	100
Width [mm]	100
Height [mm]	450
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Ambient temperature	from -30° to +45°
Energy efficiency class	D
Number of luminaires B16A	74
Net weight [kg]	5.80
EAN number	9010979085756

SKETCH

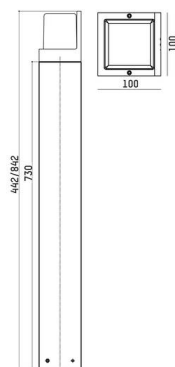

Energy label

LIGHT DISTRIBUTION CURVE

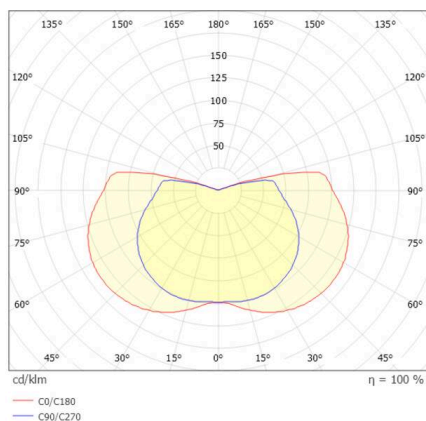

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.