



HARK

472-0250480403011

HARK SURFACE MOUNTED SPOTLIGHT made of aluminium, anthrazite, similar to RAL 7016, beam 36°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, IP65 cable length 1320mm, incl. ground spike,

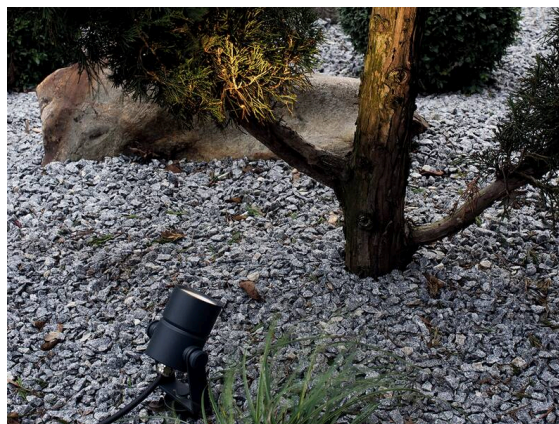


SKETCH

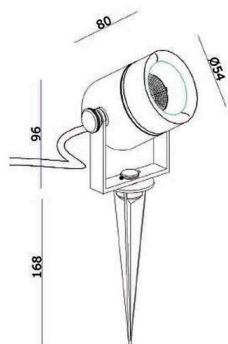

TECHNICAL DETAILS

Light source	AC LED
System performance [W]	4
Luminous flux [lm]	255
Colour temperature	3000K
CRI	>80
Dimmability	not dimmable
Light emission area	direct
Beam angle	36°
Voltage	220-240V 50/60Hz
Width [mm]	80
Height [mm]	96
Diameter [mm]	54
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 20 000
Energy efficiency class	E
Net weight [kg]	0.81
EAN number	9008905795329

LIGHT DISTRIBUTION CURVE

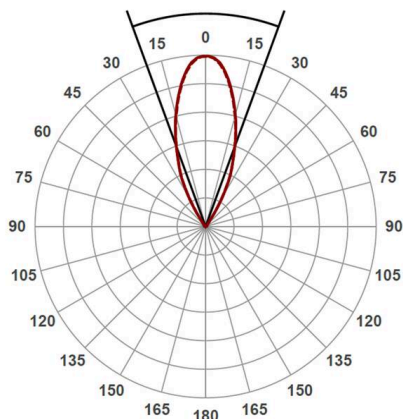

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.