


ALIAR

472-90029900

ALIAR F BOLLARD made of aluminium, anthrazite, similar to RAL 7016, light output indirect, with converter, dimmability: not dimmable, IP65




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	11
Luminous flux [lm]	460
Colour temperature	3000K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	indirect
Voltage	220-240V 50/60Hz
Length [mm]	80
Width [mm]	150
Height [mm]	600
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 20 000
Energy efficiency class	D
Number of luminaires B16A	57
Net weight [kg]	2.85
EAN number	9010506111668

LIGHT DISTRIBUTION CURVE

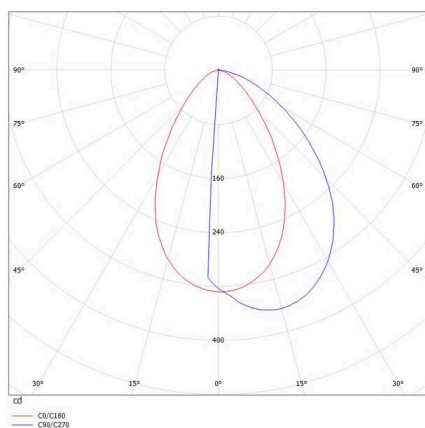

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.