




DASH 2

599-105010329050

DASH 2 SD SURFACE MOUNTED SPOTLIGHT made of aluminium, white, similar to RAL 9016, high-efficiently vacuum deposited aluminium reflector beam 24°, accessoire: glass, light output direct, UGR <19, swiveling 350°, tilting 90°, with converter, dimmability: not dimmable, adapter/ceiling base white, IP20

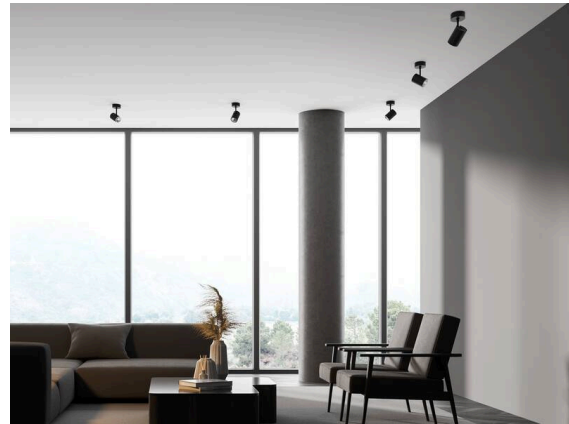


SKETCH

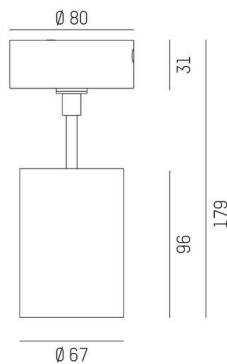

TECHNICAL DETAILS

Light source	LED
System performance [W]	10
Luminous flux [lm]	560
Colour temperature	3000K
CRI	>90
UGR	<19
Optics	vacuum deposited aluminium reflector
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	24°
Voltage	220-240V 50/60Hz
Length [mm]	80
Height [mm]	179
Diameter [mm]	67
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK01
Material	aluminium
Colour of body	white
RAL	9016
Colour of adapter / ceiling base	white
Lifetime [h]	L80 B10 20 000
Energy efficiency class	G
Number of luminaires B16A	200
Net weight [kg]	0.68
EAN number	9010506793369

LIGHT DISTRIBUTION CURVE

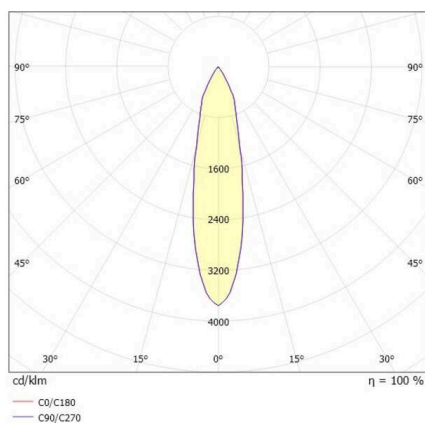

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.