

**GRID**

**629-000512240605d**


GRID SD SURFACE MOUNTED SPOTLIGHT made of metal, black white, similar to RAL 9005, lens optic with anti-glare grid beam 15°, light output direct, UGR <19, with converter, max. 490mA, dimmability: DALI, IP20



**TECHNICAL DETAILS**

Light source	LED
System performance [W]	19,5
Luminous flux [lm]	1540
Current sec. [mA]	490
Colour temperature	4000K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Converter	with converter
Dimmability	DALI
Light emission area	direct
Beam angle	15°
Voltage	220-240V 50/60Hz
Length [mm]	100
Width [mm]	100
Height [mm]	100
IP protection class	IP20
IP protection class	protection cl. I

**SKETCH**

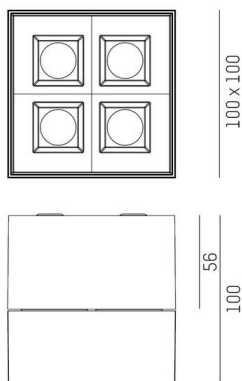


Material	metal
Colour of body	black white
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	50
Net weight [kg]	0.83
EAN number	9010979094857



Energy label

**LIGHT DISTRIBUTION CURVE**

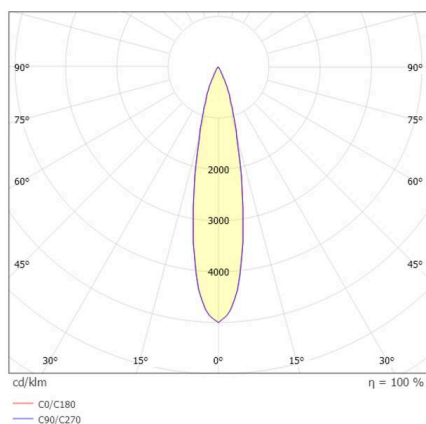

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.