

EUG-DALI-2

Summary

In the EU-BUS system, the user can control the equipment complying with DALI standard protocol via EUG-DALI gateway. The user can assign (including reassign, extent allocation) the address for DALI equipment, and ,can set group, scene, the switch-on brightness, the minimum brightness, the maximum brightness, fadetime. In addition, the user can know the state of DALI equipment via PC software or information set in advance.

Product Features


- Assign (including reassign, extent allocation) the address for DALI equipment
- In EU-BUS mode, can update firmware remotely via EU-BUS interface
- Support EU-BUS function to the DALI command
- Set parameter for DALI equipment, and, can be used with the DALI sensor,
- Support EU-BUS to DALI command function
- Supplied via EU-BUS bus, without external power supply
- The standard 35mm din rail, convenient installation




Technical Parameters

Item	Parameters
Input voltage	220V
Communication protocol	EU-BUS
The number of DALI equipment	2*64
The number of dry contact	1
Equipment size	167*96.5*65.4mm(L*W*H),standard 35mm din rail
G.W.	380g
Operational temperature	-20-50 C
Relative humidity	20-90%RH

Equipment size(mm)

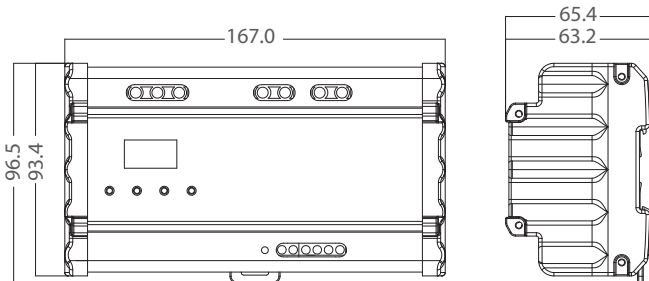

Wiring Diagram

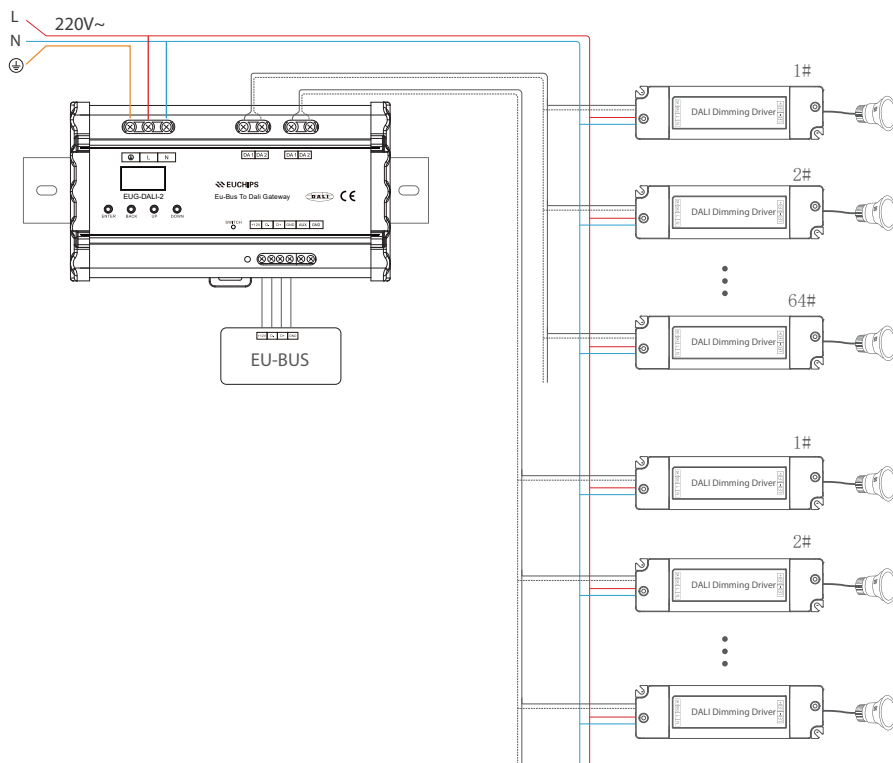

※ The contents of this manual are updated without prior notice.

If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.
Please contact us if you have any questions .

EUG-DALI-2

概述

在EU-BUS系统中，可以通过EUG-DALI来实现对支持DALI协议的设备进行管理。支持DALI设备的自动地址分配（自动重新分配、扩展分配）、DALI分组设置、场景设置、开机亮度设置、最小亮度设置、最大亮度设置、系统错误亮度设置、淡入淡出设置、设置的状态查询功能。网关可以实现对DALI设备的参数设置及EU-BUS控制命令到DALI控制命令的转换功能。




产品特点

- 在EU-BUS模式下，可以通过EU-BUS接口远程更新固件
- 支持DALI设备地址重新分配、扩展分配功能
- 支持DALI设备参数设置功能、可以配合DALI传感器、DALI面板使用
- 支持EU-BUS转DALI命令功能
- 支持调光，调色，双通道DALI网关
- 标准35mm导轨外壳，方便安装


技术参数

名称	参数
输入电压	220VAC
通讯协议	EU-BUS
支持DALI设备	2*64 个
支持辅助干接点输入	1 个
设备尺寸	167*96.5*65.4mm（长*宽*高）
毛重量	380g
工作温度	-20℃ ~+50℃
相对湿度	20-90%RH

产品尺寸（mm）

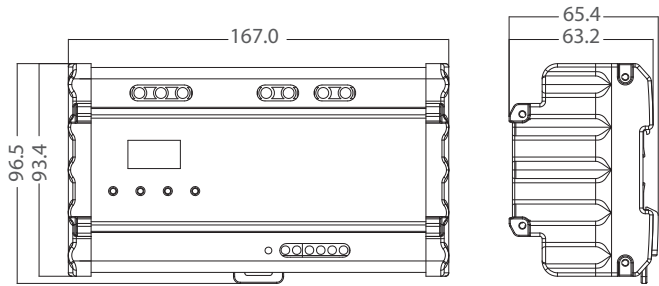

应用连接图

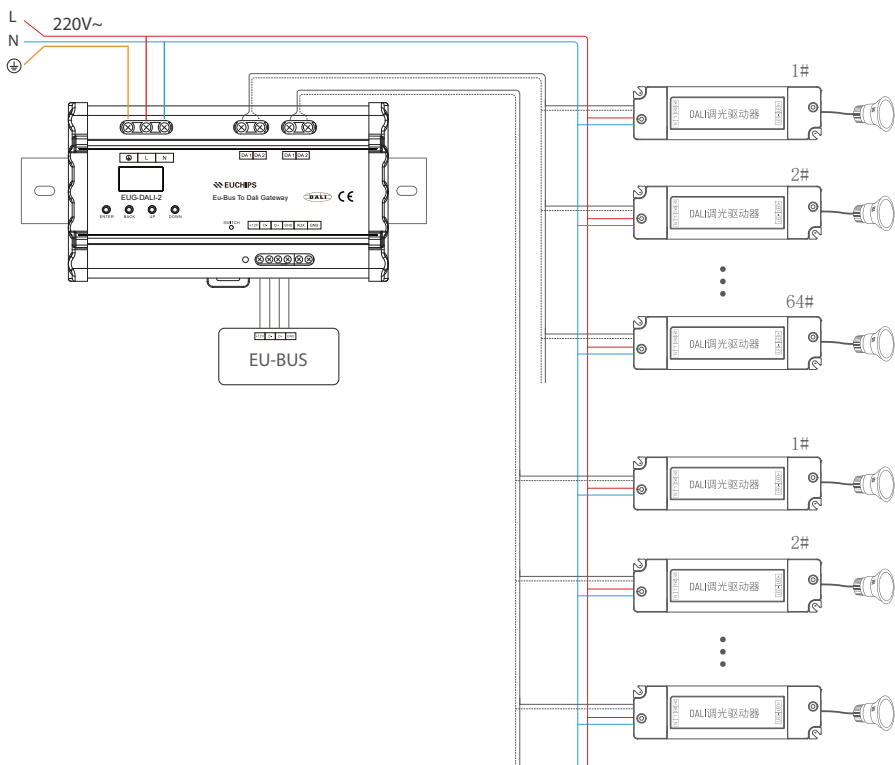

※ 本说明书内容如有更新，恕不另行通知。

若您使用的产品功能与说明书不一致时，请以产品为准。

如有疑问请与我们联系。