


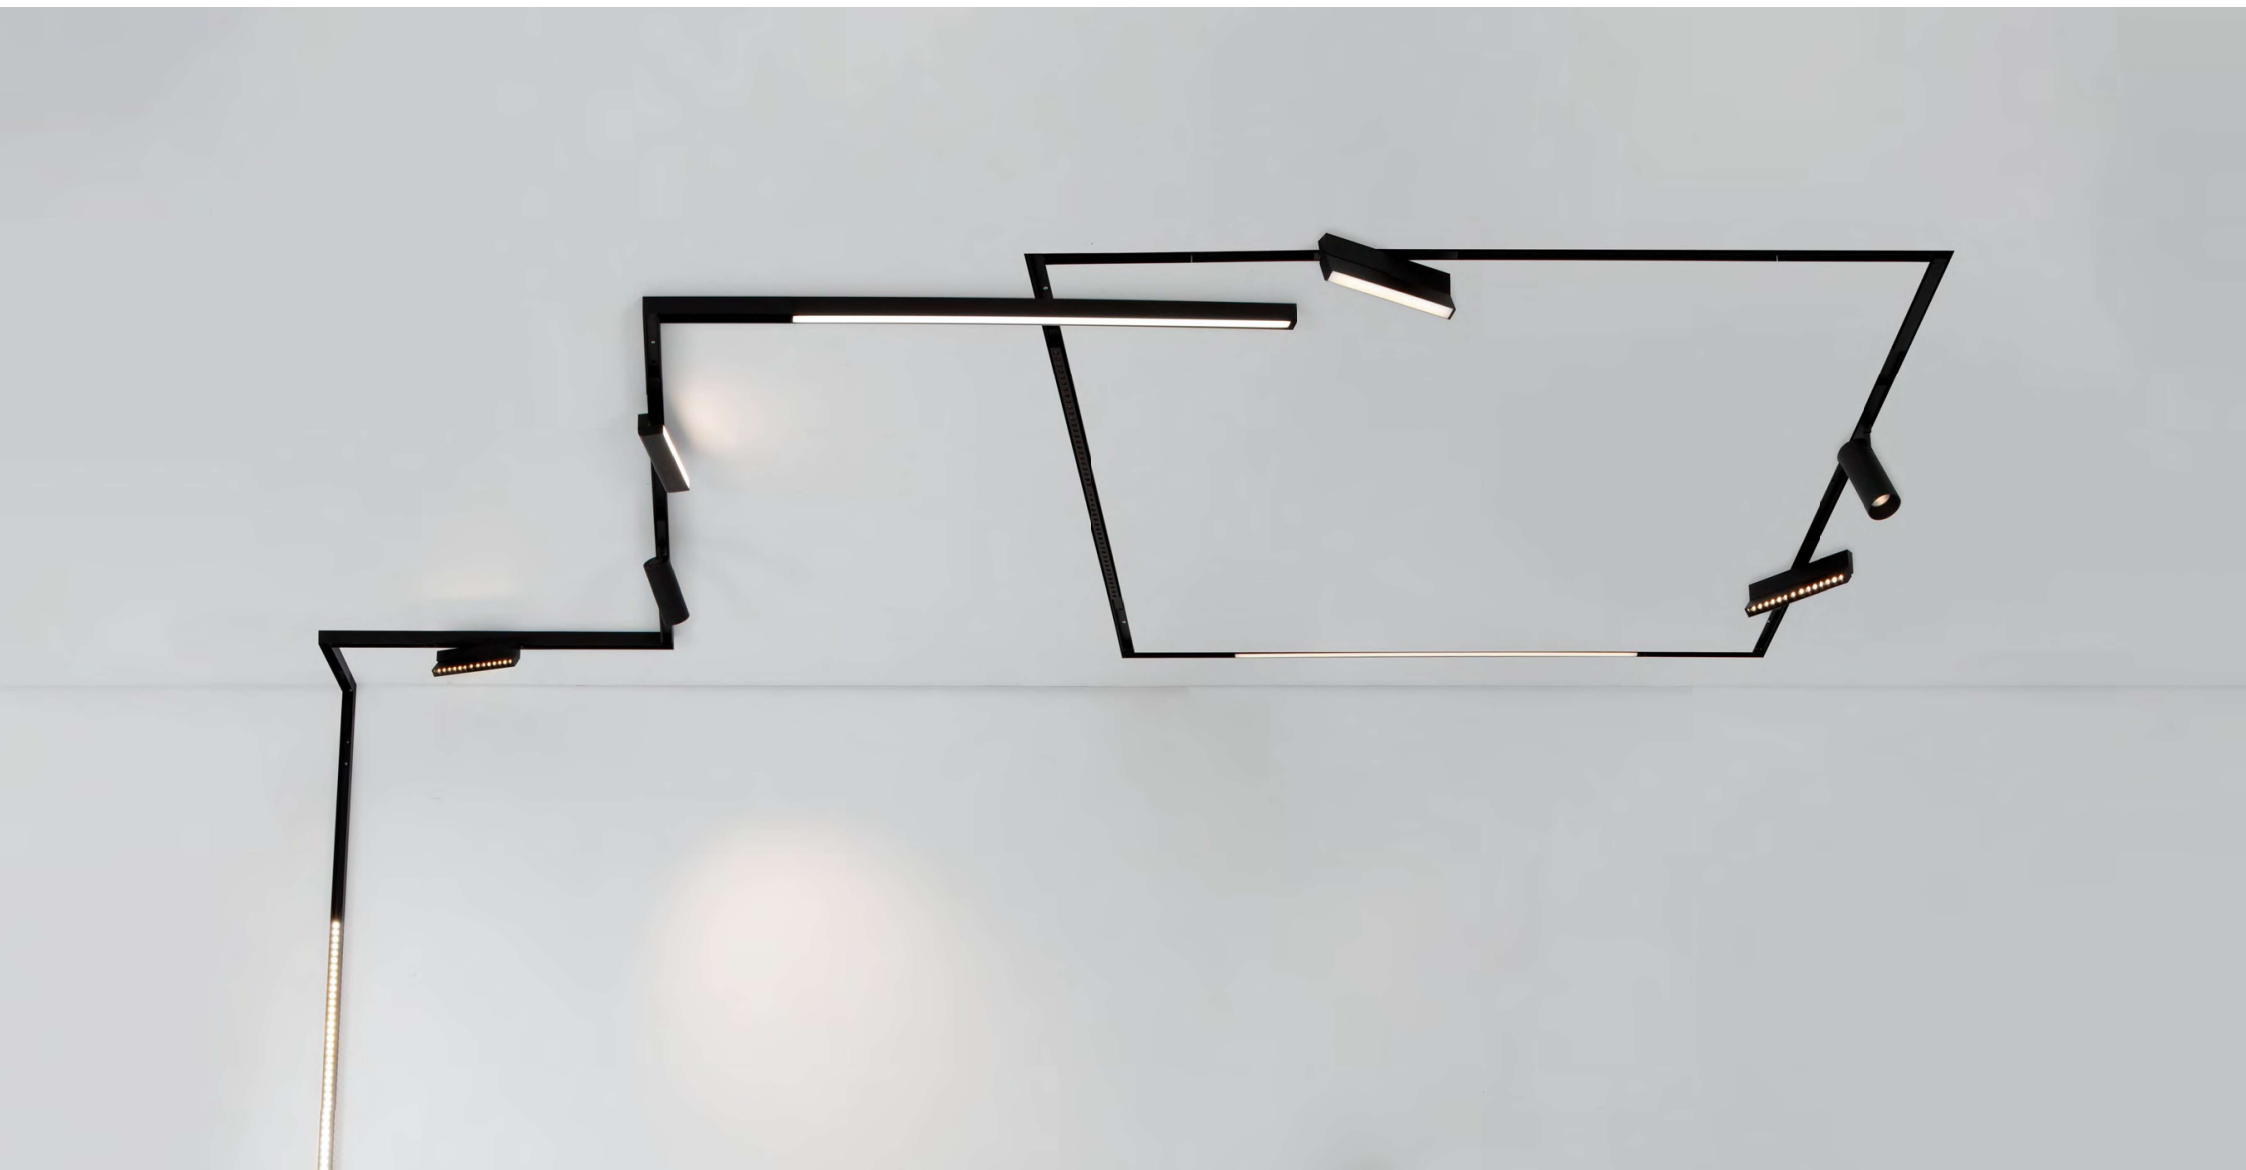


Planet PRO
24V ON/OFF
48V TRIAC



Planet is one of our **most popular track lighting ranges**, celebrated for its **versatility, sleek design, and reliable performance**. Available in both **24V (On/Off)** and **48V (Triac Dimming)** versions, it offers two **CCT options: 2700K and 3000K**, adapting effortlessly to a range of atmospheres and environments. With **unlimited configuration possibilities**, Planet supports an extensive lineup of **spotlights** and **linear modules**, making it a top choice for **residential and commercial spaces** that demand **flexibility, quality, and creative lighting solutions**.

Planet

RECESSED APPLICATION with gap





TRACKS & ACCESSORIES



		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9136100	●	1m Track (max 300w)	
		9136335	●	2m Track (max 300w)	
CORNERS		9236105	●	Vertical 90° Connector	
		9136303	●	Horizontal 90° Connector	
CONNECTORS		9236106	●	Linear Electrical Connector	
		9811361	●	Mechanical Connector	
		9136111	●	End Caps	
		9236107	●	Power Connector	

Planet

RECESSED APPLICATION without gap



TRACKS & ACCESSORIES

		CODE		DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS		9999100	●	1m Track (max 300w)	
		9999101	●	2m Track (max 300w)	
CORNERS		9999120	●	Vertical 90° Connector, Cut-Out: 3.45cm	
		9999110	●	Horizontal 90° Connector, Cut-Out: 3.45cm	
CONNECTORS		9236106	●	Linear Electrical Connector	
		9811361	●	Mechanical Connector	
		9999130	●	End Caps	
		9236107	●	Power Connector	

Remote Drivers			
	CODE	DESCRIPTION	DIMENSIONS (cm)
IP20	8252019	60 Watt, 220-240VAC, 24VDC	
	8252020	120 Watt, 220-240VAC, 24VDC	
	8252021	180 Watt, 220-240VAC, 24VDC	
IP67	9621508	75 Watt, 100-240VAC, 24VDC 1A	L 14 W 6.3 H 3.2
	9621509	100 Watt, 100-240VAC, 24VDC 1.1A	L 14 W 6.3 H 3.2
	9621510	150 Watt, 100-240VAC, 24VDC 2A	L 18 W 6.3 H 3.55
	9621511	200 Watt, 100-240VAC, 24VDC 2.4A	L 19.9 W 6.3 H 3.55

For Triac or Dali Application you should use			
	CODE	DESCRIPTION	DIMENSIONS (CM)
CONTROLLERS	9621504	75 Watt, 100-240VAC, 48VDC 3.1A, IP67	L 14 W 6.3 H 3.2
	9621505	100 Watt, 100-240VAC, 48VDC 4A, IP67	L 14 W 6.3 H 3.2
	9621506	150 Watt, 100-240VAC, 48VDC 6.25A, IP67	L 18 W 6.3 H 3.55
	9621507	200 Watt, 100-240VAC, 48VDC 8.3A, IP67	L 19.9 W 6.3 H 3.55
REMOTE DRIVERS	9136151	Triac Controller 288W	L 16 W 4.7 H 2.2
	9146151	Dali Controller one Channel 288W	L 16 W 4.7 H 2.2

Planet

SURFACE MOUNTED ACCESSORIES USAGE




TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS	9110020	1m Track (Max 300W)	
	9110021	2m Track (Max 300W)	
CORNERS	9110024	Vertical 90° Connector	
	9110022	Horizontal 90° Connector	
CONNECTORS	9236106	Linear Electrical Connector	
	9811361	Mechanical Connector	
	9910010	End Caps	
SUSPENSION CATEGORIES	9366462	Connector Tube 10cm	
	9366461	Connector Tube 10cm With Power Connector	
	9136323	Connector Tube 37.3cm	
	9136360	Connector Tube 37.3cm With Power Connector	
	9236323	Connector Tube 70cm	
	9236360	Connector Tube 70cm With Power Connector	
DRIVERS	9920015	Set Of Accessories	
	9811362	Screws	
	9010416	Track Driver 100 Watt	
	9010417	Track Driver 200 Watt	
	9010215	Driver Box, Driver Included, Power 160W	

Planet

SURFACE MOUNTED ACCESSORIES USAGE




TRACKS & ACCESSORIES

	CODE	DESCRIPTION	DIMENSIONS (cm)
LINEAR TRACKS	9136101	1m Track (max 300w)	
	9136338	2m Track (max 300w)	
CORNERS	9136105	Vertical 90° Connector	
	9136290	Horizontal 90° Connector	
CONNECTORS	9236106	Linear Electrical Connector	
	9811361	Mechanical Connector	
	9136110	End Caps	
SUSPENSION CATEGORIES	9366462	Connector Tube 10cm	
	9366461	Connector Tube 10cm With Power Connector	
	9136323	Connector Tube 37.3cm	
	9136360	Connector Tube 37.3cm With Power Connector	
	9236323	Connector Tube 70cm	
	9236360	Connector Tube 70cm With Power Connector	
DRIVERS	9920015	Set Of Accessories	
	9811362	Screw	
	9010416	Track Driver 100 Watt	
	9010417	Track Driver 200 Watt	
	9010214	Driver Box, Driver Included, Power 160W	

CHEAT SHEET FOR CONNECTORS

S: SURFACE
G: RECESSED WITH GAP
NG: RECESSED NO GAP

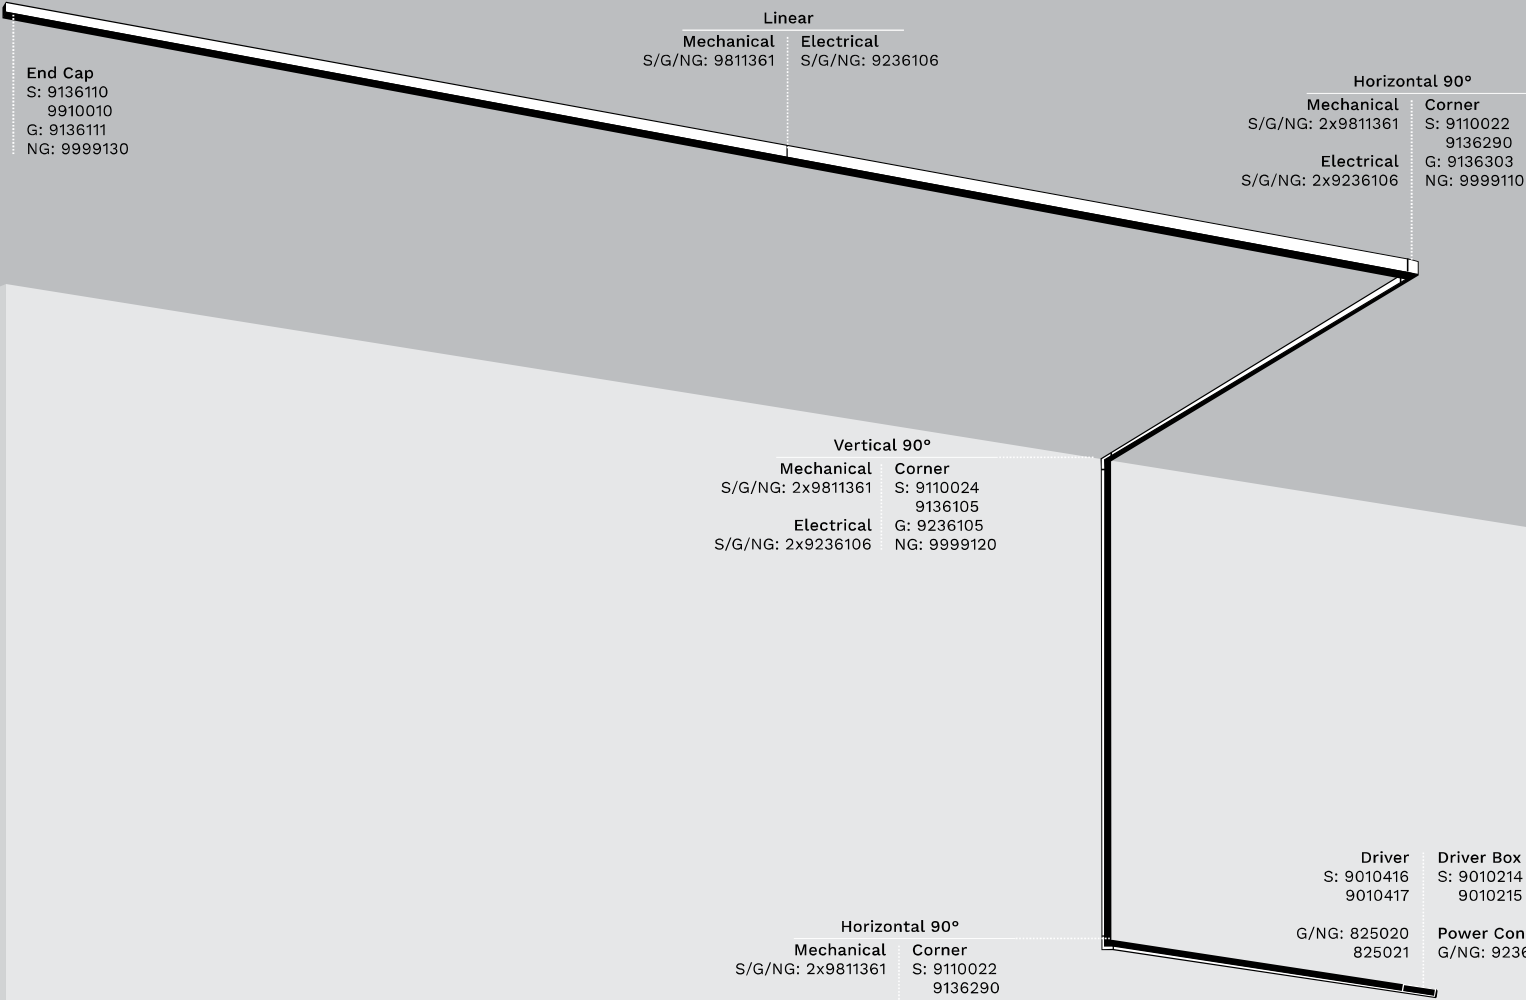



Lighting Modules



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146145 ●	13W	2700K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136121 ●	13W	3000K	400Lm	L 50 H 3	24Vdc	On/Off
9136145 ●	13W	3000K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136120 ●	26W	3000K	1069Lm	L 100 H 3	24Vdc	On/Off
9136146 ●	26W	3000K	1348Lm	L 100 H 3	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146143 ●	13W	2700K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136130 ●	13W	3000K	350Lm	L 50 H 3	24Vdc	On/Off
9136143 ●	13W	3000K	534Lm	L 50 H 3	48Vdc	Triac/Dali
9136131 ●	26W	3000K	1200Lm	L 100 H 3	24Vdc	On/Off
9136144 ●	26W	3000K	1441Lm	L 100 H 3	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146149 ●	15W	2700K	1059Lm	L 24.5 W 2 H 11	48Vdc	Triac/Dali
9136124 ●	15W	3000K	750Lm	L 24.5 W 2 H 11	24Vdc	On/Off
9136149 ●	15W	3000K	1059Lm	L 24.5 W 2 H 11	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136125 ●	15W	3000K	252Lm	L 24.5 W 2 H 11	24Vdc	On/Off
9136150 ●	15W	3000K	421Lm	L 24.5 W 2 H 11	48Vdc	Triac/Dali



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9070128 ●	3W	3000K	157Lm	L 3.6 W 2.2 H 3	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136194 ●	6W	3000K	175Lm	L 10.4 W 2.2 H 31.2	24Vdc	On/Off



CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136193 ●	6W	3000K	278Lm	L 10.4 W 2.2 H 31.2	24Vdc	On/Off



LOW VOLTAGE TRACKS - PLANET

						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9010109	10W	3000K	520Lm	D 5.5 H 5.5	24Vdc	On/Off
9010110	15W	3000K	750Lm	D 6.5 H 7	24Vdc	On/Off




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146141	10W	2700K	541Lm	L 24.5 H 13.5	48Vdc	Triac/Dali
9136141	10W	3000K	541Lm	L 24.5 H 13.5	48Vdc	Triac/Dali



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9146142	10W	2700K	650Lm	D 3.2 H 19.5	48Vdc	Triac/Dali
9136135	10W	3000K	500Lm	D 3.2 H 19.5	24Vdc	On/Off
9136140	10W	3000K	650Lm	D 3.2 H 19.5	48Vdc	Triac/Dali




						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136136	20W	3000K	955Lm	D 6.5 H 21	24Vdc	On/Off
9136142	20W	3000K	1300Lm	D 6.5 H 21	48Vdc	Triac/Dali




LOW VOLTAGE TRACKS - PLANET

						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136123	38W	3000K	2020Lm	L 150 H 12	24Vdc	On/Off
9136148	38W	3000K	2560Lm	L 150 H 12	48Vdc	Triac/Dali



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136122	15W	3000K	669Lm	D 16 H 26	24Vdc	On/Off
9136147	15W	3000K	835Lm	D 16 H 26	48Vdc	Triac/Dali



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136190	5W	3000K	200Lm	D 5 H 109.7	24Vdc	On/Off



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136191	5W	3000K	230Lm	D 4.5 H 60	24Vdc	On/Off



						
CODE	WATT	CCT	FLUX	DIMENSIONS (cm)	VOLTAGE	DIMMABLE
9136192	5W	3000K	139Lm	D 1.5 H 150	24Vdc	On/Off

