


LONA

333-s00129


LONA F SOCKET BOLLARD made of aluminium, anthrazite, similar to RAL 7016, lens beam 360°, accessoire: concrete anchor, light output direct, with converter, dimmability: DALI, IP65

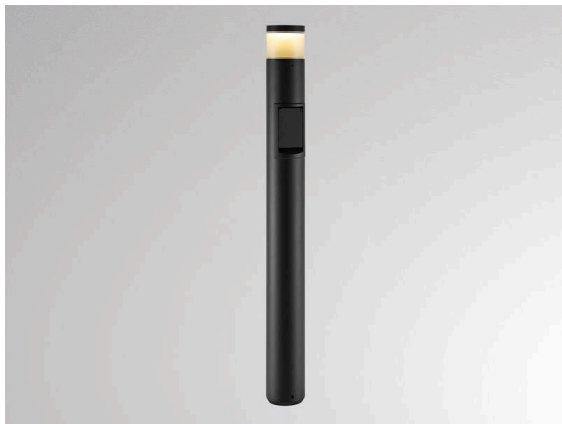

TECHNICAL DETAILS

Light source	LED
System performance [W]	11,5
Luminous flux [lm]	525
Colour temperature	3000K
CRI	>80
Optics	lens
Converter	with converter
Dimmability	DALI
Light emission area	direct
Beam angle	360°
Height [mm]	874
Diameter [mm]	100
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK08
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Ambient temperature	from -30° to +45°
Energy efficiency class	A
Number of luminaires B16A	166
Net weight [kg]	1.15
EAN number	9010979438156

LIGHT DISTRIBUTION CURVE

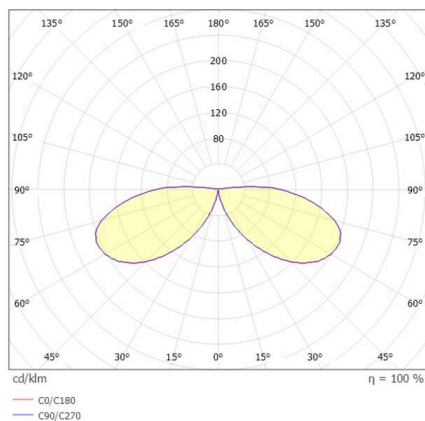

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.